


PLAN

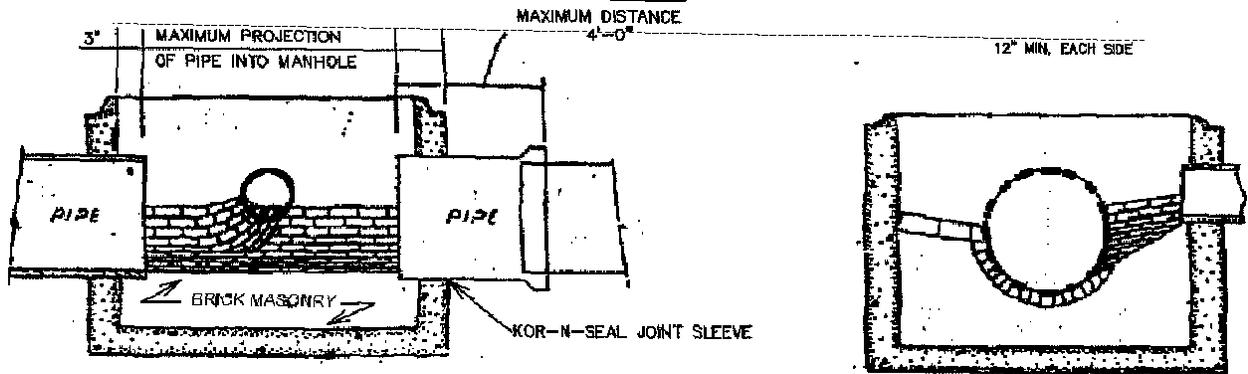

SECTION A-A

BASE SECTION TO BE FULL WALL THICKNESS AND MONOLITHIC TO A POINT 6" ABOVE THE PIPE CROWN

SECTION B-B

NOTE
INVERT AND SHELF TO BE PLACED AFTER LEAKAGE TEST

NOTE:
CONTRACTOR TO VERIFY BRICK INVERT CONSTRUCTION IN ACCORDANCE WITH CITY OF WOONSOCKET STANDARD SPECIFICATIONS.

NOTE
CARE SHALL BE TAKEN TO INSURE THAT THE BRICK INVERT IS A SMOOTH CONTINUATION OF THE SEWER INVERT. INVERT BRICKS SHALL BE LAID ON EDGE

SEWER BRICK INVERT DETAIL N.T.S.

WOONSOCKET STANDARD
SEWER BRICK INVERT DETAIL

CITY OF WOONSOCKET, RI
DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION
NOVEMBER, 2006