


City of Woonsocket

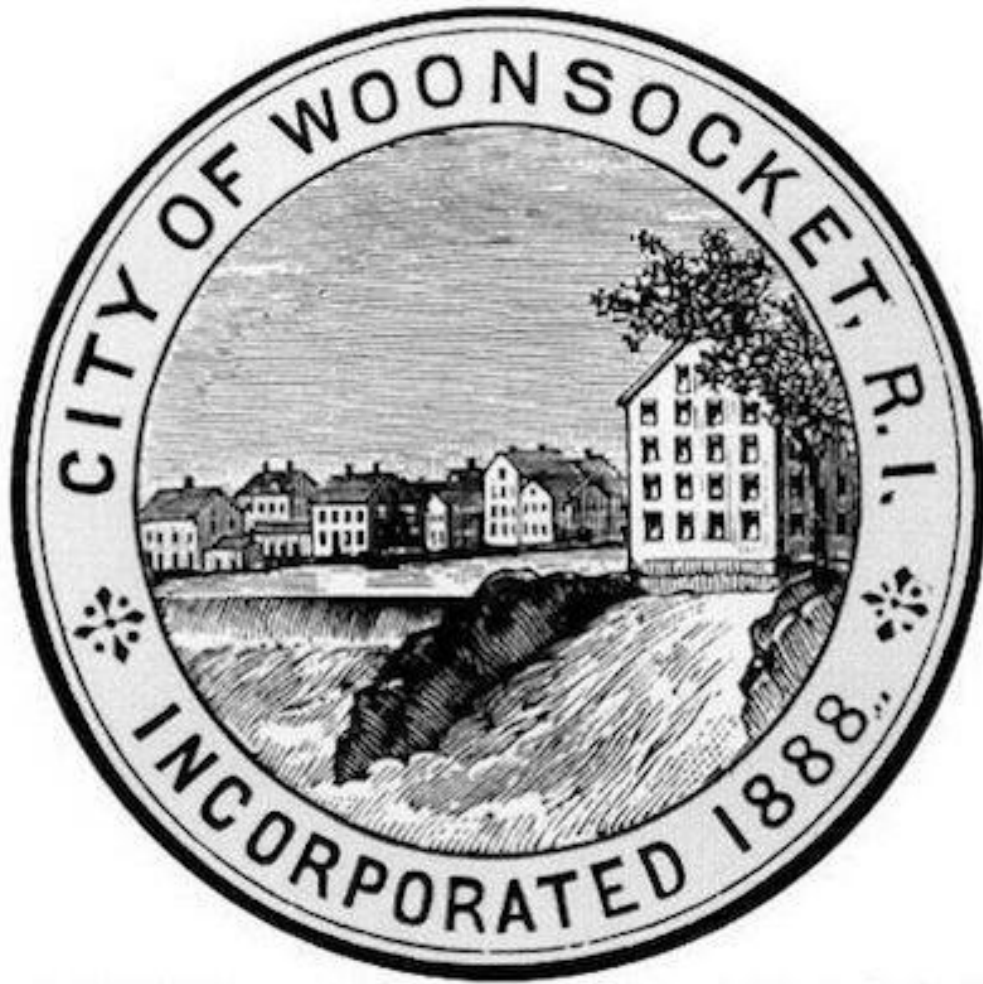


Lead Hazard Reduction 50 Alysworth Ave.

BID No. 6208

Contract Specifications

*Prepared By:
City of Woonsocket
Department of Planning & Development*

January 2024



CITY OF WOONSOCKET, RHODE ISLAND

INVITATION TO BID FOR:

“Lead Hazard Reduction – 50 Alysworth Ave.”

BID No. 6208

For Planning & Development

City of Woonsocket is accepting bid proposals for the above-referenced project.

Bid Opening: Bids must be received by Woonsocket City Hall, Office of Purchasing, 169 Main Street, Woonsocket, RI 02895 prior to the bid opening date and time. On time bids will be publicly opened and read aloud in **the Harris Hall on the 3rd floor**, located in Woonsocket City Hall, promptly starting at **2:00 p.m. on Tuesday, February 20, 2024**. Bids received after this deadline will not be accepted and will be returned unopened to the sender.

Bid Submissions: All bids must be submitted in duplicate, placed in a sealed envelope and identified with the following information: **“Lead Hazard Reduction – 50 Alysworth Ave., Bid No. 6208.”** Bids must be prepared using the provided bid forms. All forms must be typed or printed and then signed and dated in ink.

Project Components: the work shall include, but not be limited to: Lead hazard reduction of any damaged areas which has been designated by the Lead Inspector in the U.S. Department of Housing and Urban Development (HUD) regulated Comprehensive Environmental Lead Inspection (CELI).

Project Timeline: The project must commence within ten (10) business days of the award notification date.

Pre-Bidding Event: A **Mandatory site** visit walk through will be held at **50 Alysworth Ave.**, Woonsocket, RI 02895 on Wednesday, February 7, 2024, at 12:00 p.m.

Nonresident Contractors: In accordance with Rhode Island General Law 44-1-6, nonresident contractors are subject to a 3% withholding of the contract price to secure payment of any sales tax, use tax, and/or income tax withheld that may be due the State of Rhode Island. WBE, MBE and Section 3 contractors are encouraged to bid.

Bid: In conformance with the terms and conditions of these specifications including the Invitation to Bid and other documentary forms therewith, the Bidder hereby proposes, offers, and agrees if this bid be accepted within ninety (90) calendar days from the date of bid opening to do all things necessary to fully perform and satisfy all terms, conditions and requirements of the subject specifications.

Withdrawal of Bids: No bidder may withdraw their bid within ninety (90) days after the actual time and date of the bid opening thereof.

Rejection of Bids: The City reserves the right to cancel this ITB, award on the basis of cost alone, accept or reject any or all bids, in whole or in part. The City further reserves the right to waive as an informality any irregularities contained in any bid not affecting substantial rights that may be in the City's best interest. Proposals found to be technically or substantially nonresponsive at any point in the review process will be rejected and not considered further. Any such decision will be considered final.

Bid Award: Upon selection of a winning contractor, the City of Woonsocket will send a bid award notice to the awardee. The bid award notice will identify a point of contact from the City who will assist the awardee in completing any pre-work requirements. Upon satisfactory meeting all the obligations of the pre-work requirements, the City of Woonsocket will issue a "Notice to Proceed" for work to commence.

Individuals requesting interpreter services for the hearing impaired should call the Finance Director at 401-762-6400 seventy-two (72) hours in advance of the bid opening deadline.

Thank you for your consideration of this invitation to bid and your participation in this bid process.

Published: January 31, 2024

X

Christine Chamberland
Finance Director

TABLE OF CONTENTS

Title	Page
1. Definitions	1
2. Information to Bidders	2-3
3. Certification of Good Standing	4
4. Character of Work and Personnel	5
5. Site Investigation	5
6. Execution, Correlation and Intent of Documents	5
7. Specifications	5
8. Use of Premises	5
9. Subcontractors	5
10. Obligations and Liability of Contractor	5
11. Direction	6
12. Control By The Lead Hazard Construction Specialist	6
13. Commencement Prosecution and Completion	6
14. Employment of Residents	6
15. Notice to the City of Labor Disputes	6
16. Separate Contracts	6
17. The City's Right to do Work	7
18. Interference With Others	7
19. Assignment	7

20. Public Safety	7
21. Accident Prevention	7
22. Protection of Existing Structure, Property, Utilities, Work and Vegetation	7
23. Superintendence by Contractor	8
24. Inspection	8
25. Suspension of Work	9
26. Right of Cancellation	9
27. City's Right to Terminate Contract	9
28. Extension of Time	10
29. Correction of Work Final Payment	10
30. Invoices	10
31. Payments	10
32. Payment Withheld	10
33. Not All Conditions Relevant to this Bid	10
34. Lead General Requirements	12-14
35. Proposal Items (Numbered separately as 1 of 17 through 17 of 17)	15
36. Scope of Work Acceptance	16
37. Bid Proposal	17-18
38. CELI Reports – (4 separate reports)	19

DEFINITIONS

- a. **CELI** – Comprehensive Environmental Lead Inspection
- b. **City:** Whenever in this contract the word “City” is used, it shall be understood to refer to the City of Woonsocket, in the State of Rhode Island.
- c. **Contractor:** Whenever in this contract the word “Contractor” is used, it shall be understood to refer to the Lead Hazard Contractor who is the party or parties of the second part of this contract, or the representative of said party or parties. The Contractor must be licensed to conduct lead hazard reduction work in regulated facilities.
- d. **Construction Specialist:** Whenever in this contract the word “Construction Specialist” is used, it shall refer to the Lead Hazard Construction Specialist for the City of Woonsocket.
- e. **Director:** Whenever in this contract the word “Director” is used, it shall be understood to refer to the Director of Planning & Development for the City of Woonsocket, acting either directly or indirectly through any authorized designee, assistant, consultant, or inspector having either general or immediate charge of the work, limited only by the limited duties entrusted to him.
- f. **Lead Hazard Program Manager:** Whenever in this contract the word “Lead Hazard Program Manager” is used, it shall be understood to refer to as the person responsible for the day-to-day operations of the City’s Lead Hazard Reduction Program in accordance with all City, State and Federal regulations.
- g. **Lead Inspector:** Whenever in this contract the word “Lead Inspector” is used, it shall be understood to refer to Certified Environmental Lead Inspectors who per RIDOH, can conduct Comprehensive Environmental Lead Inspections, Clearance Inspections, and Annual Re-inspections and can issue Certifications of Lead-Free or Lead-Safe Status after these inspections. They can conduct Clearance Inspections and issue Certifications of Acceptable Clearance Status to Lead Hazard Control Firms for compliance with the Renovation, Repair, and Painting Rule. They can also conduct Limited Environmental Lead Inspections to look for lead in paint, drinking water, interior dust, or exterior soil.
- h. **RIDOH:** Rhode Island Department of Health
- i. **Specifications:** Whenever in this contract the word “Specifications” is used it shall be understood to refer to the body of directions and all written or printed agreements and instructions pertaining to the method and manner of performing the work and/or to the quantities and qualities of the materials and work to be furnished under the Contract. The Invitation to Bidders, Proposals, General Conditions, Special Conditions, if any, and Technical Specifications are all a part of the “Specifications”.
- j. **WLHP:** Woonsocket Lead Hazard Program

Nomenclature: Whenever in the specifications or upon the plans the words directed, required, ordered, designated, prescribed, or words of similar meanings are used, it shall be understood that the words “by the Lead Construction Specialist” immediately following the word is intended. Similarly, the words approval, acceptable, satisfactory, or words of similar meaning shall mean approval by, acceptable to, or satisfactory to the Lead Hazard Program Manager, unless otherwise stated.

INFORMATION TO BIDDERS

CITY OF WOONSOCKET

FINANCE DEPARTMENT

(401) 762-6400

1. RECEIPT AND OPENING OF PROPOSALS

Sealed bids/proposals will be accepted, and time stamped upon receipt in the Finance Department, City of Woonsocket, 169 Main Street, Woonsocket, Rhode Island, 02895, until the time indicated on the attached Advertisement for Bids, for the commodities, equipment or services listed in the specifications. Bid/Proposals will be publicly read at the time specified in the advertisement.

Timeline - the following timeline is subject to revision:

RFP Issued	1/31/24
Walk Through	2/07/24
Proposal submittal deadline	2/20/24
Public Opening	2/20/24
Selection of firm	3/05/24

2. FORM OF BID

All contractors must use the bid sheet to submit their bids to the WLHP. A separate sheet with itemized expenses can be attached to the bid sheet but only for the purpose of explaining costs that have been listed on the bid sheet. Any item that is not in the bid sheet even if included on a separate sheet will not be considered by WLHP.

3. SUBMISSION OF BIDS

Envelopes containing bids must be sealed and addressed to the Finance Department, Office of Purchasing, City of Woonsocket, 169 Main St, Woonsocket, Rhode Island, 02895, and must be marked with the name and address of the bidder. Proposals received prior to the time of opening will be securely kept and unopened. No responsibility will be attached to an officer or person for the premature opening of a proposal not properly addressed and identified.

4. RHODE ISLAND SALES TAX

The City is exempt from the payment of the Rhode Island Sales Tax under the 1956 General Laws of the State of Rhode Island, 44-18-30, Paragraph 1, as amended.

5. FEDERAL EXCISE TAXES

The City is exempt from the payment of any excise tax or federal transportation taxes. The price of the bid must be exclusive of taxes and will be so constructed.

6. ADDENDA AND INTERPRETATIONS

No interpretation of the meaning of the specifications or other documents will be made to any bidder orally. Every request for such interpretation must be made in writing and addressed to the purchasing agent, City of Woonsocket, 169 Main Street, Woonsocket, Rhode Island 02895.

To be given consideration, all inquiries must be received by the date and time as noted in the solicitation. If no date is provided in the solicitation, the City will gather any inquiries received and will collectively respond to and publish those responses no later than seven (7) calendar days prior to the date of the bid opening.

Any and all such inquiries, corrections, interpretations, and any supplemental instructions will be in the form of written addenda. All addenda will be posted, at a minimum, on the City's website, in the "Bid Opportunities" section, beneath the specific corresponding solicitation. All addenda become part of the specification document from their effective dates.

It is the bidder's responsibility to check for and download any and all posted addenda up to the bid opening date and time.

Each bidder must ascertain, prior to submitting their Proposal that they have received all addenda issued and must acknowledge the receipt in their submitted Proposal.

No addendum will be posted later than two (2) calendar days prior to bid opening date except for an addendum, if necessary, postponing the opening date or the withdrawal of the solicitation.

Any written or oral instructions concerning a solicitation, unless supported by an addendum, regardless of the source of that information, is non-binding, should not be relied upon and is not considered part of the specification documents.

In the event there is a discrepancy between verbal communication and written communication, the written communication will govern.

7. DELIVERY

All purchases related to this bid are to be delivered within the City of Woonsocket. Delivery is to be supplied with a Purchase Order. No extra charges for delivery, handling or other services will be honored. Only inside delivery and set-up, where required, will be accepted. TAILGATE DELIVERIES WILL BE REFUSED. The vendor must notify the City of Woonsocket 24 hours prior to delivery. All claims for damage in transit shall be the responsibility of the successful bidder. The City will not make payment on damaged goods, they must be replaced, or adjustments made at the option of the City. The City of Woonsocket is only represented by the Finance Director in these matters and said director shall be the only entity to negotiate any settlements. Deliveries must be made during normal working hours.

8. Bidder must comply with all State Labor Laws.

9. The successful bidder must have all current taxes paid which are owed to the City of Woonsocket and State of Rhode Island.

CITY OF WOONSOCKET

RHODE ISLAND

FINANCE DEPARTMENT

PURCHASING DIVISION

THE OFFICER OF THIS COMPANY, HEREBY, CERTIFIES THAT THIS COMPANY IS IN GOOD STANDING WITH THE STATE OF RHODE ISLAND AND ALL THE REQUIRED RECORDS HAVE BEEN FILED WITH THE STATE.

NAME:	
CORPORATION NAME:	
BY:	TITLE:
STREET ADDRESS:	
CITY:	STATE:
WITNESS:	DATE:

1. CHARACTER OF WORK AND PERSONNEL

The work shall be executed in a careful and professional manner by properly trained and qualified workers or craftsmen in strict accordance with the plans and/or specifications. Contractor shall supply and maintain portable toilet units to accommodate the number of workers on the site. Contractors shall hire competent and qualified workers. All machine operators, if needed, must have valid and current Rhode Island operator's license.

2. SITE INVESTIGATIONS

Bidders must satisfy themselves through personal examinations of the location of the proposed work and to the accuracy of the information contained in the specifications and drawings. The submission of any bid shall be accepted by the City as satisfactory proof that the bidder has satisfied himself in this respect. He shall not, after the submission of this bid, assert that there was any misunderstanding regarding the nature or amount of work to be done.

3. EXECUTION, CORRELATION, AND INTENT OF DOCUMENTS

The Contract Documents are complementary and what is called for by anyone shall be as binding as if called for by all. The intention of the document is to include all labor and materials, equipment, and transportation necessary for the proper execution of the work. All costs of material, equipment and labor supplied by the Contractor which is incidental to the acceptable completion of the project, shall be considered to have been included in the price or prices quoted and no separate payments will be made.

4. SPECIFICATIONS

It shall be the responsibility of the Contractor to study the specifications and other instructions. He shall request clarification from the Lead Hazard Reduction Manager of any errors, inconsistencies or omissions which may be discovered.

5. USE OF PREMISES

The Contractor shall confine all apparatus to the roadway or property in which the work is being performed and will not unreasonably encumber these premises with such apparatus, materials, supplies and equipment. The contractor shall promptly remove and dispose of all debris resulting from his operations. The contractor shall hold the City harmless from claims by abutting and adjacent property owners for damages resulting from his operation.

6. SUBCONTRACTORS

The Contractor shall notify the City, in writing, of the names of all subcontractors together with a summary of the extent and character of the work to be done by each subcontractor.

The Proposal shall include a blank form to be used for this purpose where such subcontractors have been selected by the bidder during the bidding period.

The City shall approve or disapprove subcontractors after award of general contract. The City shall be notified before any changes in subcontractors during progress of the project.

7. OBLIGATIONS AND LIABILITY OF CONTRACTOR

The Contractor shall take responsibility for the work done under this contract, for the protection of all the work, and for preventing injuries and damage to property or utilities on or about the work. The Contractor shall bear all losses sustained by him or by the City because of the quality or character of the work, because the nature of the land differs from that which was estimated or expected, or on account of the weather, conditions, or other causes. The Contractor shall assume the defense of

all claims, regardless of Character against the contractor or the City. The contractor shall indemnify and hold harmless the City, its officers, or agents, against all claims for injuries to persons, corporations or property arising out of the work done under this contract; or groundless, false, or fraudulent claims or claims relating to labor, and materials furnished for the work.

8. DIRECTION

The Planning Department and/or Lead Hazard Program Manager/Construction Specialist shall confirm major directions, in writing, to the Contractor. Other directions, given verbally by the Lead Hazard Program Manager or Construction Specialist, shall be confirmed only upon request.

9. CONTROL BY THE LEAD HAZARD CONSTRUCTION SPECIALIST

The Construction Specialist and/or Lead Hazard Program Manager shall have general supervision and direction of the work. The Contractor shall abide by all orders, directions, and requirements, and shall perform all work to the satisfaction of the Director of Planning & Development.

The Construction Specialist and/or Lead Hazard Program Manager shall have the authority to reject all materials which do not conform to the contract; to approve the methods, manner and sequence of all work; to determine the amount, quality, acceptability, and fitness of all parts of the work; and shall interpret the plans, specifications and other contract documents, issue any extra work orders and give final approval to the complete work.

The Construction Specialist and/or Lead Hazard Program Manager shall decide upon all questions in connection with the work and shall within a reasonable time after presentation to him of such questions, make decision, in writing, relating to the execution and progress of the work or the interpretation of the contract documents.

The Construction Specialist and/or Lead Hazard Program Manager shall have the authority to make minor changes to the work, not involving extra cost, providing such changes are consistent with the purpose of the work. No extra work shall be authorized without a written order from the Engineer, except in an emergency that is endangering life or property. No claim for an addition to the contract sum shall be valid unless so ordered.

10. COMMENCEMENT PROSECUTION AND COMPLETION

The Contractor will be required to commence work under this contract within 7 days after signing the contract the time limit specified therein after the date of the notice to proceed, to prosecute the work with faithfulness and energy, and to complete the entire work under this contract by the limit stipulated. The completion time is 7 days after commencement of work and the completion time stipulated above shall include final cleanup of the premises.

11. EMPLOYMENT OF RESIDENTS

The Contractor shall employ residents of the City during the construction of the work under this contract whenever possible.

12. NOTICE TO THE CITY OF LABOR DISPUTES

The Contractor shall immediately notify the Construction Specialist and/or Lead Hazard Program Manager of any actual or potential labor disputes, whenever he has knowledge of such, which might delay timely performance of the contract work.

13. SEPARATE CONTRACTS

The City reserves the right to let other contracts in connection with this work. The Contractor shall afford other contractors' reasonable opportunity for the introduction and storage of their materials and the execution of their work. He shall properly connect and coordinate his work with their work.

If any part of the Contractor's work depends upon the work of any other contractor for proper execution or results, the Contractor shall inspect and promptly report to the Construction Specialist and/or Lead Hazard Program Manager any defects in such work that cause it to be unsuitable for the proper execution or results. His failure to inspect or report such defects shall constitute an acceptance of the other contractor's work as fit and proper for the reception of his work, except as to defects which may develop in the other contractor's work after the execution of the Contractor's work.

14. THE CITY'S RIGHT TO DO WORK

If the Contractor should neglect to prosecute the work properly or fail to perform any provision of this contract, the City, after written notice to the Contractor, may, without prejudice to any other remedy the Contractor may have, make good such deficiencies, and may deduct the cost thereof from the payment then or thereafter due the Contractor.

15. INTERFERENCE WITH OTHERS

The Contractor shall coordinate with the City's refuse hauler, Waste Management of RI, to allow access into the work zone for the service of trash, recycling, and yard waste collection during the construction.

The Contractor shall not interfere with materials, appliances, or workmen of the City, Public Utility Companies, or any other contractor, who may be performing work at the same sites. All contractors and other parties involved shall have equal rights as far as practicable, to the use of all roads and grounds, except as otherwise provided by these specifications. The decision of the Construction Specialist and/or Lead Hazard Program Manager shall govern in cases of disagreement between contractors or other parties regarding such use.

16. ASSIGNMENT

Neither party to the Contract shall assign the contract or sublet it without the written consent of the other. The Contractor shall not assign any monies due or to become due to him hereunder, without the previous written consent of the Construction Specialist and/or Lead Hazard Program Manager.

17. PUBLIC SAFETY

The Contractor shall provide, erect, and maintain continually, seven day per week and twenty-four hours per day, all necessary barricades, reflective signs, signals, flashing lights, etc., and take all necessary precautions for the protection of the work and the safety of the public. A detailed safety plan for the entire contract must be submitted to and approved by the Construction Specialist and/or Lead Hazard Program Manager prior to commencement of work under this contract.

18. ACCIDENT PREVENTION

Precaution shall be exercised at all times until completion and acceptance for the protection of private property and all persons, including employees. The safety provisions of applicable laws and of local building and construction codes shall be observed. Machinery, equipment, and all hazards shall be guarded or eliminated according to the best safety regulations and procedures.

19. PROTECTION OF EXISTING STRUCTURES, PROPERTY, UTILITIES, WORK AND VEGETATION

The Contractor shall arrange with all private property owners, public utility companies and all other interested parties for the relocation, maintenance and/or protection of all private property, public utility facilities, poles, fixtures, appurtenances, and service connections, within or adjacent to the limits of construction or as directed by the Director of Planning & Development.

The Contractor shall perform and carry out his work in such a manner as not to interfere with or damage fixtures mentioned herein or as shown on the plans or discovered during construction which are to be left within the limits of the project. The Contractor will preserve and protect all existing vegetation, such as trees, shrubs, and grass on or adjacent to the site, which do not unreasonably interfere with the construction as determined by the Director of Planning & Development.

The Contractor will be responsible for damage done to any telephone or power poles or transmission lines; water mains, fire hydrants and appurtenances; gas mains or service connections; sewer mains, building sewer connections and other appurtenances of a similar nature which are fixed or controlled by the City, Public Utility Company, Private Corporation, or private person.

The Contractor will be responsible for all unauthorized cutting of trees and shrubs, including damage due to careless operation of equipment, stockpiling of materials or tracking of grass areas by equipment. The City will not be responsible for any delays or inconvenience to the Contractor in carrying on his work in the above-mentioned manner and/or while the City, Public Utility Companies or corporations are making necessary adjustment to their fixtures or appurtenances.

Damage to any kind of private or public property, not authorized in the contract, shall be repaired, or restored promptly by or at the expense of the Contractor. The Contractor must assume all responsibility for any delay or damage incurred due to working around or joining his work to fixtures left in place. No separate payment will be made for protecting, maintaining, or repairing private property. Any additional cost incurred shall be at the expense of the Contractor and shall be considered as completely covered by and included in the contract prices for the various bid items involved.

20. SUPERINTENDENCE BY CONTRACTOR

The Contractor shall give efficient supervision to the work, using his best skill and attention. He will employ at the site of the work, during the entire performance thereof, a competent superintendent and any necessary assistants who will be satisfactory to the Director of Planning & Development. They shall not be changed, except with the consent of the Director of Planning & Development, unless they cease to be in the employ of the Contractor. Such superintendents shall represent and have full authority to act for the Contractor in his absence and all directions given such superintendent shall be binding as if given to the Contractor.

21. INSPECTION

The work will be conducted under the general direction of the Construction Specialist and is subject to inspection by his appointed inspectors in order to ensure strict compliance with the terms of the Contract. No inspector is authorized to change any provision of the specifications without written authorization from the Construction Specialist and/or Lead Hazard Program Manager nor shall the presence or absence of an inspector relieve the Contractor from any requirements of the Contract. Construction Specialist and/or Lead Hazard Program Manager shall make a thorough examination of the work as soon as practicable after the completion of the entire work or any divisible part thereof as may be designated in these specifications. Any work that will be buried, covered or concealed in any way after its completion must be inspected by Construction Specialist and/or Lead Hazard Program Manager or one of his appointed inspectors before such work is buried, concealed, or covered. If any work should be covered without approval or consent of the Engineer, it must, if required by the Director of Planning & Development, be uncovered for examination at the Contractor's expense.

The Construction Specialist and/or Lead Hazard Program Manager may order re-examination of questionable work, and if so ordered, the Contractor must uncover the work. The City shall pay the

cost for re-examination and replacement if such work is found to be in accordance with the Contract Documents. The Contractor shall be responsible for such costs if such work is found to be not in accordance with the Contract Documents, unless he shall show that another contractor caused the defect in the work. The City shall pay such costs if this is found to be the case.

The Contractor shall give written notice to the Director of Planning & Development instructions, by drawings or otherwise, that will involve extra cost under this contract. He shall give such notice before proceeding to execute the work or within a reasonable time after receiving such instructions, except in the case of an emergency that shall endanger life or property. Provisions for changes in the work shall then be made. No such claim for the cost of extra work shall be valid, unless made in this manner.

22. SUSPENSION OF WORK

Construction Specialist and/or Lead Hazard Program Manager may suspend all or any part of the work because of hazardous conditions caused by the Contractor's operation or whenever such suspension is necessary to insure proper execution of the Contract.

Notice to suspend the work, or any part thereof, shall be given to the Contractor in writing. The City shall reimburse the Contractor for the expense incurred the Contractor in connection with the work under this Contract as a result of such suspension. The Contractor may abandon any portion of the work suspended by the City, if the work or any part thereof is stopped by a written notice or if the City does not give such written notice within seven (7) calendar days of the date fixed in the written notice to suspend. The Contractor will then be entitled to the estimates and payments for all work done on the portions of work so abandoned, if any.

23. RIGHT OF CANCELLATION

The City reserves the right to delete or cancel all or any part of the work as listed in the information to Bidders or to delete or cancel any appurtenance or item thereof without recourse by the Contractor. The award of this contract is dependent upon availability of GRANT FUNDS and the successful completion of all Environmental Tier Reviews (ERR).

24. CITY'S RIGHT TO TERMINATE CONTRACT

The City reserves the right to terminate the contract; if the Contractor should be adjudged bankrupt; if the Contractor should make a general assignment for the benefit of his creditors; if a receiver should be appointed on account of the Contractor's insolvency; if the Contractor should persistently or repeatedly refuse or fail to supply enough properly skilled workmen or proper materials, except in cases for which an extension of time is provided; if the Contractor should fail to make prompt payment to subcontractors or suppliers of material or labor; if the Contractor persistently and repeatedly disregards laws, ordinances or the instructions of the Director of Planning & Development; or should otherwise be guilty of a substantial violation of any provision of the Contract. The Director of Planning & Development shall certify, in writing and without prejudice to any other right or remedy, that sufficient cause exists to justify such action. Such notice shall be given to the Contractor at least seven (7) days prior to termination of the Contract. The City shall take possession of the premises and all material thereon immediately upon termination of the contract. The Contractor shall not be entitled to receive any further payments until the work is finished. If the unpaid balance of the contract price, including compensation for additional managerial and administrative service, exceeds the expense for finishing the work, the City shall pay such excess to the Contractor. If such expense shall exceed such unpaid balance, the Contractor shall pay the difference to the City. The expenses and damages incurred by the City, as a result of the Contractor's default, shall be certified by the Director of Planning & Development.

24. EXTENSION OF TIME

If the Contractor is delayed at any time in the progress of work by any act or neglect of the City or of its employees; by changes ordered in the work; by strikes, lockouts, fire, unusual transportation delays, unavoidable casualties, by any causes beyond the Contractor's control, by any delay authorized by the Construction Specialist and/or Lead Hazard Program Manager pending arbitration, or by any causes which the Construction Specialist and/or Lead Hazard Program Manager shall decide to justify the delay, then the time of completion shall be extended for such reasonable time as the Construction Specialist and/or Lead Hazard Program Manager may decide.

No such extension of time shall be made for delays which occur more than seven (7) days before a written claim is made to the Director of Planning & Development. Only one claim is necessary in the case of a continuing cause for delay.

This article does not exclude the recovery of damages for delays, by either party, under other provisions of the Contract Documents.

25. CORRECTION OF WORK BEFORE FINAL PAYMENT

If the Contractor does not remove such condemned work and materials within a reasonable time, fixed by the Lead Hazard Construction Specialist and/or by written notice, the City may remove them and may store the material at the expense of the Contractor. If the Contractor does not pay the expense of such removal within ten (10) days thereafter, the City may, following an additional ten (10) days written notice, sell such materials at auction or at private sale. The City shall keep an account of the net proceeds thereof, after deducting all the costs and expenses that should have been borne by the Contractor.

27. INVOICES

The invoice will need to be submitted after the job has been approved by the Lead Hazard Construction Specialist.

28. PAYMENTS

The total price bid shall include all costs for furnishing all materials, performing all the work, and furnishing all the tools, equipment, overhead items, and incidentals necessary to complete the work. The payment will be based upon the contract price except that the City may deduct and retain various amounts to cover damages or claims.

29. PAYMENT WITHHELD

The City may withhold from final payment such payment as deemed necessary by the Lead Hazard Program Manager to protect against loss of:

- a. Defective work not remedied.
- b. Claims filed or reasonable and probable evidence of claims to be filed.
- c. Failure of the Contractor to properly make payments to subcontractors.
- d. Damage to another Contractor.

Payment shall be made in the amount withheld when the above grounds are removed.

30. NOT ALL CONDITIONS MAYBE RELEVANT TO THIS BID

1. Regulatory Adherence: Services provided by the selected firm and its subcontractors shall be performed in accordance with all applicable local, state, and federal laws, regulations, and guidance, including RIDOH, RIDEM and USEPA.

2. Liability & Insurance: The Department agrees to indemnify and hold the owner harmless from any claims arising out of any act or omission (negligence) of the Department or its employees, servants, agents, assigns, contractors, and representatives in the performance of the above-described actions and that all contractors shall provide and maintain in full force and effect insurance in which the City shall be named as an "additional insured." Coverage shall be not less than \$1 million per occurrence and \$2 million in aggregate.
3. Dig Safe: Contractor to make appropriate arrangements.
4. File Format: All final deliverables to be submitted in paper and electronic format unless otherwise specified by the Department.
5. Response Preparation: The Department shall not assume liability for expenses incurred by a respondent, or prospective respondent, in connection with the preparation or delivery of a response, a finalist interview, or any other action related to this RFP's selection process.
6. Payment: Payment shall be made on a reimbursement basis for services in the Scope-of-Work.
7. By submitting a response to the RFP, each firm waives all rights to protest or seek remedies whatsoever regarding any aspect of this RFP, the selection of a firm or firms with whom to negotiate, the rejection of any or all offers to negotiate, or a decision to terminate negotiations.

31. LEAD GENERAL REQUIREMENTS

All program and project requirements, rules and regulations are defined in the contractor's protocols. Failure to comply may result in penalties, disciplinary actions and possibly removal from the program.

WORK WRITE UP AND STRUCTURAL BUILDING PROCEDURES:

When not specified or clearly implied, the contractor's structural work must be done in accordance with specific city and State of Rhode Island Building Codes. All products installed must be done to the Manufacturer's Recommendation installation instructions.

QUANTITIES AND MEASUREMENTS:

Any measurements included with this bid package are not guaranteed by the City of Woonsocket Lead Program or the property owner. Neither the City of Woonsocket Lead Program nor the property owner is responsible for exact measurements. All quantities and measurements shall be field verified by each bidder. Contractor is responsible for quantities. Unless noted in the submitted bid, contractor agrees to complete the job without claims for additional work based upon discrepancies in quantities and measurement.

MATERIALS:

All materials used in connection with this work write-up are to be new, of first quality and without defects unless stated otherwise on the specifications or approved in writing by the owner and the Construction Specialist.

LEAD SAFE CERTIFICATE:

Successful passage of a Post-Abatement Environmental Lead Inspection to Lead-Safe status as defined in Section C 1.4 of the RI Regulations is required at the completion of the work and before final disbursement of funds for that property. If there are items that are not

on the specifications attached that are needed to obtain a Lead-Safe Certificate, it is the contractor’s responsibility to notify the construction specialist of any extra work required that may not be on the original agreed upon specifications attached. Any change orders that require extra payment or extra time must be approved in writing by and between the program manager, homeowner, and the contractor.

COMMENCEMENT PROSECUTION AND COMPLETION

The Contractor will be required to commence work under this contract within the time limit specified therein after the date of the notice to proceed, to prosecute the work with faithfulness and energy, and to have the entire work substantially completed under this contract by the limit stipulated. The Substantial Completion time is specified in **TABLE A** at the end of this section. The Substantial Completion time stipulated above shall include final cleanup of the premises.

Table A

Time of Completion	Commence within 01 consecutive calendar days after the date of formal execution of the contract and complete within 07 days of commencement per unit.
--------------------	---

It is acknowledged that the Contractor’s failure to achieve Substantial Completion of the Work within the Contract Time provided by the Contract Documents will cause the City to incur substantial economic damages and losses of types and in amounts which are impossible to compute and ascertain with certainty as a basis for recovery by the City of actual damages, and that liquidated damages represent a fair, reasonable and appropriate estimate thereof. Accordingly, in lieu of actual damages for such delay, the Contractor agrees that liquidated damages may be assessed and recovered by the City as against Contractor and its Surety, in the event of delayed completion and without the City being required to present any evidence of the amount or character of actual damages sustained by reason thereof; therefore Contractor shall be liable to the City for payment of liquidated damages in the amount of One Thousand Dollars (\$1,000) for each day that Substantial Completion is delayed beyond the Contract Time as adjusted for time extensions provided by the Contract Documents. Such liquidated damages are intended to represent estimated actual damages and are not intended as a penalty, and Contractor shall pay them to City without limiting City’s right to terminate this agreement for default as provided elsewhere herein.

NON-COMPLIANCE LIABILITY:

The contractor shall comply with all applicable Federal, State, and local regulations regarding the work being performed and shall incur the costs of all fines and work requirements resulting from non-compliance. The contractor shall indemnify and hold harmless the City of Woonsocket Lead Program and the property owner from any such fine or work requirements resulting from non-compliance. City of Woonsocket Lead Program reserves the right to stop work and shut down any job where the contractor is violating any state regulation regarding the Rules and Regulations for Lead Poisoning Prevention r23-24.6PB.

CHANGE ORDERS:

Any additional change orders occurring after the contract signing will not be paid for and are not valid UNLESS agreed upon in writing by the property owner, and the contractor. Additional time will not be given to the contractor for any change of order unless agreed upon in writing in the change order.

INSURANCE MINIMUMS:**Contractors Commercial General Liability Insurance**

\$1,000,000 per occurrence

\$2,000,000 policy aggregate

Commercial Motor Vehicle Liability Insurance

\$1,000,000 Combined Single Limit Per Occurrence

Worker's Compensation Insurance:

The Contractor shall furnish, to the Lead Hazard Program manager, verification of Worker Compensation insurance according to Title 28, Chapter 29, of the RI Worker Compensation Law upon award of the contract

Contractors Pollution Liability (CPL) insurance is required:

The Contractor shall furnish a copy to the Lead Hazard Program Manager upon award of the contract.

THE CITY OF WOONSOCKET shall be included as an "additional insured" on all policies except for Workers Compensation. Satisfactory evidence of insurance shall be furnished prior to commencement of the work. Agent's cancellation policy must be included.

CLEANING:

The contractor shall clean the entire house so as to ensure the property owner a Lead-Safe home. After completion of all lead hazard reduction activities and removal of containment except for critical barriers isolating work areas from no-work areas; HEPA vacuum all surfaces; wet clean all surfaces with allowable detergent (TSP) and rinse; performing a second HEPA vacuuming. Repeat cleaning cycle as needed to achieve compliance with RIDOH Lead Poisoning Prevention Regulations.

CONTRACTOR LICENSING:

All contractors performing Lead Hazard Reduction work must be licensed as a Lead Hazard Reduction Contractor in accordance with Subpart D.1 of the RIDOH Lead Poisoning Prevention Regulations.

LEAD WORKER PROTECTION:

Persons carrying out Lead Hazard Reduction activities must receive approved training in accordance with the RIDOH Lead Poisoning Prevention Regulations and OSHA worker protection regulations. All workers on any site containing lead must possess a minimum of a 24hr Lead Workers License issued through the RIDOH.

SIGNAGE:

Install a prominent sign in appropriate language(s) at the front and rear entrances of the building prior to starting any lead hazard reduction activity within.

SUPERVISOR TRAINING:

Lead Hazard Reduction Supervisors must be trained and licensed in accordance with the current RIDOH Lead Poisoning Prevention Regulations. A 40hr licensed LHR Supervisor or licensed LHR Contractor must be present on the job site at all times when lead hazard reduction work is being performed.

INTERIOR CONTAINMENT:

Construct interior containment in accordance with RIDOH Lead Poisoning Prevention Regulations as applicable.

EXTERIOR CONTAINMENT:

Provide exterior containment and cleanup as needed in accordance with RIDOH Lead Poisoning Prevention Regulations as applicable.

HEAT GUNS:

No heat guns are allowed while conducting any work in the City of Woonsocket Lead Hazard Reduction Program.

LEAD DEMO AND WASTE DISPOSAL:

All waste, both hazardous and non-hazardous, is to be managed in accordance with all applicable Federal, State and local regulations. The Contractor and the Owner are jointly responsible for ensuring that waste classified as hazardous is transported, manifested, and delivered by licensed transports.

ONE YEAR MATERIAL & LABOR GUARANTEE:

All labor and material will be covered in full for a minimum of one year from the final clearance date of the project.

PROPOSAL ITEMS

Specs By Location

1/30/2024

Address: 50 Alysworth Avenue			Unit: Copmmon Areas		
Location: 1 - General Conditions			Approx. Wall SF: 0		Ceiling/Floor SF: 0
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
1	<p>9001 **LEAD GENERAL REQUIREMENTS**</p> <p>WORK WRITE UP AND STRUCTURAL BUILDING PROCEDURES:</p> <p>When not specified or clearly implied, the contractor's structural work must be done in accordance with specific city and state building codes or nationally recognized "BOCA" codes. All products installed must be done to the Manufacturer's Recommendation installation instructions.</p> <p>QUANTITIES AND MEASUREMENTS:</p> <p>Any measurements included with this bid package are not guaranteed by the Woonsocket Lead Program or the property owner. Neither the Woonsocket Lead Program nor the property owner is responsible for exact measurements. All quantities and measurements shall be field verified by each bidder. Contractor is responsible for quantities. Unless noted in the submitted bid, contractor agrees to complete the job without claims for additional work based upon discrepancies in quantities and measurement.</p> <p>MATERIALS:</p> <p>All materials used in connection with this work write-up are to be new, of first quality and without defects unless stated otherwise on the specifications or approved in writing by the owner and the Construction Specialist. Unless otherwise noted windows are provided by the program.</p> <p>LEAD SAFE CERTIFICATE:</p> <p>Successful passage of a Post-Abatement Environmental Lead Inspection to Lead-Safe status as defined in Section C 1.4 of the RI Regulations is required at the completion of the work and before final disbursement of funds for that property. If there are items that are not on the specifications attached that are needed to obtain a Lead-Safe Certificate, it is the contractors responsibility to notify the construction specialist of any extra work required that may not be on the original agreed upon specifications attached. Any change orders that require extra payment or extra time must be approved in writing by and between the program manager, homeowner and the contractor.</p> <p>NON-COMPLIANCE LIABILITY:</p> <p>The contractor shall comply with all applicable Federal, State and local regulations regarding the work being performed and shall incur the costs of all fines and work requirements resulting from non-compliance. Contractor shall indemnify and hold harmless the Woonsocket Lead Program and the property owner from any such fine or work requirements resulting from non-compliance. Woonsocket Lead Program reserves the</p>	1.00	EA		

Address: 50 Alysworth Avenue			Unit: Copmmon Areas		
Location:	1 - General Conditions		Approx. Wall SF: 0	Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price
Trade: 9	Environmental Rehab				
	<p>right to stop work and shut down any job where the contractor is violating any state regulation regarding the Rules and Regulations for Lead Poisoning Prevention [r23-24.6PB].</p> <p>CHANGE ORDERS: Any additional change orders occurring after the contract signing will not be paid for and are not valid UNLESS agreed upon in writing by the property owner, and the contractor. Additional time will not be given to the contractor for any change order unless agreed upon in writing in the change order.</p> <p>INSURANCE: The Contractor shall furnish evidence of a comprehensive public liability insurance coverage plan protecting the property owner for not less than \$300,000.00 in the event of bodily injury including death and \$50,000.00 in the event of property damage arising out of work performed by the contractor.</p> <p>CLEANING: The contractor shall clean the entire house so as to ensure the property owner a Lead-Safe home. After completion of all lead hazard reduction activities and removal of containment except for critical barriers isolating work areas from no-work areas; HEPA vacuum all surfaces; wet clean all surfaces wit allowable detergent (TSP) and rinse; performing a second HEPA vacuuming. Repeat cleaning cycle as needed to achieve compliance with RIDOH Lead Poisoning Prevention Regulations.</p> <p>CONTRACTOR LICENSING: All contractors performing Lead Hazard Reduction work must be licensed as a Lead Hazard Reduction Contractor in accordance with Subpart D.1 of the RIDOH Lead Poisoning Prevention Regulations.</p> <p>LEAD WORKER PROTECTION: Persons carrying out Lead Hazard Reduction activities must receive approved training in accordance with the RIDOH Lead Poisoning Prevention Regulations and OSHA worker protection regulations.</p> <p>HANG SIGN: Install a prominent sign in appropriate language(s) at the front and rear entrances of the building prior to starting any lead hazard reduction activity within.</p> <p>SUPERVISOR TRAINING: Lead Hazard Reduction Supervisors must be trained and licensed in accordance with the current RIDOH Lead Poisoning Prevention Regulations. A licensed LHR Supervisor or licensed LHR Contractor must be present on the job site at all times when lead hazard reduction work is being performed.</p> <p>INTERIOR CONTAINMENT: Construct interior containment in accordance with RIDOH Lead</p>				

Address: 50 Alysworth Avenue			Unit: Copmmon Areas		
Location: 1 - General Conditions		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
	Poisoning Prevention Regulations as applicable.				
	EXTERIOR CONTAINMENT: Provide exterior containment and cleanup as needed in accordance with RIDOH Lead Poisoning Prevention Regulations as applicable.				
	HEAT GUNS: No heat guns are allowed while conducting any work in the Woonsocket Lead Hazard Reduction Program.				
	LEAD DEMO AND WASTE DISPOSAL: All waste, both hazardous and non-hazardous, is to be managed in accordance with all applicable Federal, State and local regulations. The Contractor and the Owner are jointly responsible for ensuring that waste classified as hazardous is transported, manifested and delivered by licensed transports.				
	ONE YEAR MATERIAL & LABOR GUARANTEE: All labor and material will be covered in full for a minimum of one year from the final clearance date of the project.				
				Location Total:	
Location: 2 - Side Common		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
2	9123-DPD INTERIOR: FULL CONTAIN & CLEAN	1.00	EA		
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.				
3	9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT	2.00	EA		
	After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint.				

Page 3 of 19

Address: 50 Alysworth Avenue			Unit: Copmmon Areas		
Location: 2 - Side Common		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
	SIDE A 1ST FLOOR DOOR CASE/JAMB				
	SIDE A 2ND FLOOR DOOR JAMB				
4	9537-DPD THRESHOLD(S): STRIP AND RECOAT	1.00	EA		
	Strip paint/finish to bare wood; prep, apply primer/sealer and two full coats of floor grade paint/finish. Consult Minimum Standards for Materials.				
	SIDE A 2ND FLOOR DOOR CASE/JAMB				
				Location Total:	
Location: 3 - Basement Entry		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
5	9123-DPD INTERIOR: FULL CONTAIN & CLEAN	1.00	EA		
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.				
6	9450-DPD WINDOW TRIM - STABILIZE & RECOAT	1.00	EA		
	After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint.				
	SIDE B WINDOW JAMB				
7	9454-DPD WINDOW(S): REPLACE W/ VRW	1.00	EA		
	Remove and dispose of interior stops, parting bead and sash, sash weight system; open weight pocket panel & HEPA/Vac cavity; fill cavity with insulation and replace panel. Remove and dispose of storm windows. Install a virgin vinyl, 1 over 1, DH, DG VRW, with latch(es) (2 each if > 30"), night latches; insulate gap between new vinyl frame and existing wood jamb, header and sill; prime & install new interior stops; caulk interior and exterior joints and frame to eliminate air infiltration. If existing window stops are coated with varnish and in good condition				

Address: 50 Alysworth Avenue			Unit: Copmmon Areas		
Location: 3 - Basement Entry		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
	<p>they may be re-installed. If interior stops were painted then prime and install new window stops. Window installation should be level and plumb. Apply primer/sealer, and full finish coat of paint to interior stop, sill, header and side jambs. Paint color and finish to match existing. Consult Minimum Standards for Materials.</p> <p>SIDE B WINDOW</p>				
8	9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT	1.00	EA		
	<p>After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint.</p> <p>SIDE C DOOR JAMB</p>				
				Location Total:	
Location: 4 - Side B 1st Floor Porch		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
9	9120-DPD EXTERIOR: CONTAINMENT SYSTEM	1.00	EA		
	<p>Establish & maintain containment according to RI Department of Environmental Management Air Pollution Control Regulation #24. Containment system shall be adequate to keep paint chips from contaminating the yard, play equipment, shrubbery, etc. and also to contain new paint spray and drips. Dispose of construction debris and vacuum paint chips.</p>				
10	9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT	1.00	EA		
	<p>After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint.</p> <p>SIDE D DOOR JAMB</p>				
11	9491-DPD DOOR(S): STABILIZE & RECOAT	1.00	EA		
	<p>Stabilize and prep door(s). Strip paint from hinge barrels and tighten hinges and other hardware by tightening or replacing screws. Apply full coat of primer/sealer and single topcoat to match existing color and finish. Consult Minimum Standards for Materials.</p> <p>SIDE C DOOR</p>				

Address: 50 Alysworth Avenue			Unit: Copmmon Areas		
Location: 4 - Side B 1st Floor Porch		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9 Environmental Rehab					
12	9629-DPD EXT. METAL: STABILIZE & RECOAT Stabilize and prep exterior metal. Apply full metal primer and single coat of metal finish. Owner selection of color. Consult Minimum Standards for Materials. SIDE D VENT	1.00	SF		
Location Total:					
Location: 5 - Side B 2nd Floor Porch		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9 Environmental Rehab					
13	9120-DPD EXTERIOR: CONTAINMENT SYSTEM Establish & maintain containment according to RI Department of Environmental Management Air Pollution Control Regulation #24. Containment system shall be adequate to keep paint chips from contaminating the yard, play equipment, shrubbery, etc. and also to contain new paint spray and drips. Dispose of construction debris and vacuum paint chips.	1.00	EA		
14	9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint. SIDE C/D DOOR JAMB	2.00	EA		
15	9491-DPD DOOR(S): STABILIZE & RECOAT Stabilize and prep door(s). Strip paint from hinge barrels and tighten hinges and other hardware by tightening or replacing screws. Apply full coat of primer/sealer and single topcoat to match existing color and finish. Consult Minimum Standards for Materials. SIDE C DOOR	1.00	EA		
16	9537-DPD THRESHOLD(S): STRIP AND RECOAT Strip paint/finish to bare wood; prep, apply primer/sealer and two full coats of floor grade paint/finish. Consult Minimum Standards for Materials. SIDE D DOOR THRESHOLD	1.00	EA		
Location Total:					
Location: 6 - House Body		Approx. Wall SF: 0		Ceiling/Floor SF: 0	

Address: 50 Alysworth Avenue			Unit: Copmmon Areas			
Location:	6 - House Body		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
17	9122	EXTERIOR GROUND CONTAINMENT Attach two layers of 12' wide 6 mil polyethylene sheeting to the building perimeter with staples or furring strips extending 10' past the work area. Construct a work site perimeter curb of 4" x 4" timbers wrapped under the containment. Create an outer barrier of flags or plastic tape 3' on center, 20' form work site. Close and lock all windows and doors from the interior on the work site elevation. Remove and replace daily.	1.00	EA	_____	_____
18	9477-DPD	BASEMENT WINDOW(S): INSTALL V R W W/NEW FRAME Establish containment for interior and exterior work areas. Remove and dispose of existing frame and sash. Construct new frame assembly according to Program Drawing DWG 8-01; fill gaps between framing and frame with mortar/insulation/caulk/hydraulic cement/limited expansion sealant; install primed exterior stops. Install hopper or slider type (owner's choice), DG window; insulate gap between window frame and new vinyl window. Frame and window installation should be level and plumb; caulk seams and joints to eliminate air infiltration. HEPA Vac/Clean both interior and exterior work areas. Consult Minimum Standards for Materials. SIDE B & D CELLAR WINDOWS	8.00	EA	_____	_____
19	9490-DPD	DOOR TRIM/JAMB - STABILIZE & RECOAT After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint. SIDE C DOOR JAMB	1.00	EA	_____	_____
20	9537-DPD	THRESHOLD(S): STRIP AND RECOAT Strip paint/finish to bare wood; prep, apply primer/sealer and two full coats of floor grade paint/finish. Consult Minimum Standards for Materials. SIDE C DOOR THRESHOLD	1.00	EA	_____	_____
Trade: 10	Carpentry					
21	3550	PORCH LATTICE--REPLACE Dispose of any existing lattice around porch crawl space. Frame opening with 1"x 4" preservative treated pine with vertical members 24" on center. Install 1/4"x 2" vinyl lattice on frame. SIDE ABD LATTICE	200.00	SF	_____	_____
Location Total:					_____	_____

Address: 50 Alysworth Avenue	Unit: Unit 1 Front
-------------------------------------	---------------------------

Location: 1 - Rm #1 Bedroom	Approx. Wall SF: 0	Ceiling/Floor SF: 0
------------------------------------	--------------------	---------------------

Spec #	Spec	Quantity	Units	Unit Price	Total Price
--------	------	----------	-------	------------	-------------

Trade: 9 **Environmental Rehab**

22	9129-DPD INTERIOR: FINAL CLEAN	1.00	EA	_____	_____
	Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6.				

Location Total: _____

Location: 2 - Rm #2 Living Room	Approx. Wall SF: 0	Ceiling/Floor SF: 0
--	--------------------	---------------------

Spec #	Spec	Quantity	Units	Unit Price	Total Price
--------	------	----------	-------	------------	-------------

Trade: 9 **Environmental Rehab**

23	9123-DPD INTERIOR: FULL CONTAIN & CLEAN	1.00	EA	_____	_____
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.				

24	9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT	1.00	EA	_____	_____
	After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint. SIDE D DOOR JAMB				

Location Total: _____

Location: 3 - Rm #3 Kitchen	Approx. Wall SF: 0	Ceiling/Floor SF: 0
------------------------------------	--------------------	---------------------

Spec #	Spec	Quantity	Units	Unit Price	Total Price
--------	------	----------	-------	------------	-------------

Trade: 9 **Environmental Rehab**

25	9123-DPD INTERIOR: FULL CONTAIN & CLEAN	1.00	EA	_____	_____
----	--	------	----	-------	-------

Address: 50 Alysworth Avenue			Unit: Unit 1 Front		
Location: 3 - Rm #3 Kitchen		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.				
26	9494-DPD DOOR(S): PLANE EDGES & TOUCH UP	1.00	EA		
	Plane door edges and/or strip jamb to eliminate friction points so that a min.1/8" gap is open between jambs, threshold and door. Touch up door edges and jamb where necessary; paint/sealer to match existing color and finish. Consult Minimum Standards for Materials. SIDE C DOOR				
				Location Total:	
Location: 4 - Rm #4 Bathroom		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
27	9123-DPD INTERIOR: FULL CONTAIN & CLEAN	1.00	EA		
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.				
28	9450-DPD WINDOW TRIM - STABILIZE & RECOAT	1.00	EA		
	After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex				

Address: 50 Alysworth Avenue	Unit: Unit 1 Front
-------------------------------------	---------------------------

Location: 4 - Rm #4 Bathroom	Approx. Wall SF: 0	Ceiling/Floor SF: 0
-------------------------------------	--------------------	---------------------

Spec #	Spec	Quantity	Units	Unit Price	Total Price
--------	------	----------	-------	------------	-------------

Trade: 9 **Environmental Rehab**

paint.
SIDE B WINDOW SILL/JAMB

29	9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT	1.00	EA	_____	_____
	After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint. SIDE A DOOR JAMB				

30	9494-DPD DOOR(S): PLANE EDGES & TOUCH UP	1.00	EA	_____	_____
	Plane door edges and/or strip jamb to eliminate friction points so that a min. 1/8" gap is open between jambs, threshold and door. Touch up door edges and jamb where necessary; paint/sealer to match existing color and finish. Consult Minimum Standards for Materials. SIDE A DOOR				

Location Total: _____

Location: 5 - Rm #5 Bedroom	Approx. Wall SF: 0	Ceiling/Floor SF: 0
------------------------------------	--------------------	---------------------

Spec #	Spec	Quantity	Units	Unit Price	Total Price
--------	------	----------	-------	------------	-------------

Trade: 9 **Environmental Rehab**

31	9123-DPD INTERIOR: FULL CONTAIN & CLEAN	1.00	EA	_____	_____
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.				
32	9165-DPD CLOSET(S): STABILIZE & RECOAT ALL SURFACES	1.00	EA	_____	_____
	Stabilize and prep all components and surfaces inside the closet excluding the door; spot prime and apply full single finish coat to match existing color and finish. Consult Minimum Standards for Materials. SIDE A CLOSET				

Address: 50 Alysworth Avenue			Unit: Unit 1 Front			
Location:	5 - Rm #5 Bedroom		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
33	9450-DPD WINDOW TRIM - STABILIZE & RECOAT		1.00	EA		
	After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint.					
	SIDE B WINDOW SILL/JAMB					
34	9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT		1.00	EA		
	After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint.					
	SIDE B DOOR CASE/JAMB					
35	9547-DPD TRIM: STABILIZE & RECOAT		1.00	EA		
	Stabilize and prep trim; fully prime/seal and caulk seams; apply full finish coat to match existing color and finish. Consult Minimum Standards for Materials.					
	ALL BASEBOARDS					
Location Total:						
Unit Total for 50 Alysworth Avenue, Unit Unit 1 Front:						

Address: 50 Alysworth Avenue			Unit: Unit 1 Rear			
Location:	1 - Rm #1 Bedroom		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
36	9123-DPD INTERIOR: FULL CONTAIN & CLEAN		1.00	EA		
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and					

Address: 50 Alysworth Avenue			Unit: Unit 1 Rear			
Location: 1 - Rm #1 Bedroom			Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
	move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.					
37	9162-DPD CEILING: SPOT TREATMENT		1.00	EA	_____	_____
	Stabilize and prep spot treatment areas; spot prime and spot finish. Finish coat to match existing color and finish. Consult Minimum Standards for Materials.					
	ALL PREVIOUSLY PAINTED CEILINGS INCLUDING CLOSET					
38	9547-DPD TRIM: STABILIZE & RECOAT		1.00	EA	_____	_____
	Stabilize and prep trim; fully prime/seal and caulk seams; apply full finish coat to match existing color and finish. Consult Minimum Standards for Materials.					
	ALL BASEBOARDS INCLUDING CLOSET					
Location Total:					_____	
Location: 2 - Rm #2 Living Room			Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
39	9129-DPD INTERIOR: FINAL CLEAN		1.00	EA	_____	_____
	Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6.					
Location Total:					_____	
Location: 3 - Rm #3 Bedroom			Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
40	9123-DPD INTERIOR: FULL CONTAIN & CLEAN		1.00	EA	_____	_____
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance					

Address: 50 Alysworth Avenue			Unit: Unit 1 Rear			
Location: 3 - Rm #3 Bedroom			Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
	inspection.					
41	9547-DPD TRIM: STABILIZE & RECOAT		1.00	EA		
	Stabilize and prep trim; fully prime/seal and caulk seams; apply full finish coat to match existing color and finish. Consult Minimum Standards for Materials.					
	SIDE C CLOSET BASEBOARD					
Location Total:						
Location: 4 - Rm #4 Kitchen			Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
42	9129-DPD INTERIOR: FINAL CLEAN		1.00	EA		
	Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6.					
Location Total:						
Location: 5 - Rm #5 Bathroom			Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
43	9123-DPD INTERIOR: FULL CONTAIN & CLEAN		1.00	EA		
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.					
44	9162-DPD CEILING: SPOT TREATMENT		1.00	EA		
	Stabilize and prep spot treatment areas; spot prime and spot finish. Finish coat to match existing color and finish. Consult Minimum Standards for Materials.					
	ALL PREVIOUSLY PAINTED CEILINGS					

Address: 50 Alysworth Avenue

Unit: Unit 1 Rear

Location Total: _____

Location: 6 - Rm #6 Dining Room

Approx. Wall SF: 0

Ceiling/Floor SF: 0

Spec #	Spec	Quantity	Units	Unit Price	Total Price
--------	------	----------	-------	------------	-------------

Trade: 9 Environmental Rehab

45 9129-DPD INTERIOR: FINAL CLEAN

1.00

EA

Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6.

Location Total: _____

Location: 7 - Rm #7 Entry Foyer

Approx. Wall SF: 0

Ceiling/Floor SF: 0

Spec #	Spec	Quantity	Units	Unit Price	Total Price
--------	------	----------	-------	------------	-------------

Trade: 9 Environmental Rehab

46 9123-DPD INTERIOR: FULL CONTAIN & CLEAN

1.00

EA

Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.

47 9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT

1.00

EA

After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint.

SIDE C DOOR CASE/JAMB

Location Total: _____

Unit Total for 50 Alysworth Avenue, Unit Unit 1 Rear: _____

Address: 50 Alysworth Avenue

Unit: Unit 2 Front

Location: 1 - Rm #1 Bedroom

Approx. Wall SF: 0

Ceiling/Floor SF: 0

Address: 50 Alysworth Avenue			Unit: Unit 2 Front		
Location:	1 - Rm #1 Bedroom	Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
48	9123-DPD INTERIOR: FULL CONTAIN & CLEAN Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.	1.00	EA	_____	_____
49	9450-DPD WINDOW TRIM - STABILIZE & RECOAT After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint. SIDE A WINDOW CASING	1.00	EA	_____	_____
Location Total:					_____

Location: 2 - Rm #2 Living Room			Approx. Wall SF: 0		Ceiling/Floor SF: 0
Spec #	Spec	Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab				
50	9123-DPD INTERIOR: FULL CONTAIN & CLEAN Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.	1.00	EA	_____	_____
51	9450-DPD WINDOW TRIM - STABILIZE & RECOAT After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water	1.00	EA	_____	_____

Address: 50 Alysworth Avenue	Unit: Unit 2 Front
-------------------------------------	---------------------------

Location: 2 - Rm #2 Living Room	Approx. Wall SF: 0	Ceiling/Floor SF: 0
--	--------------------	---------------------

Spec #	Spec	Quantity	Units	Unit Price	Total Price
--------	------	----------	-------	------------	-------------

Trade: 9 Environmental Rehab

to the point of saturation. Lightly scrape all loose paint.
Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint.
SIDE B WINDOW STOP

52	9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT	1.00	EA	_____	_____
	After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint. SIDE A DOOR CASE/JAMB				

53	9547-DPD TRIM: STABILIZE & RECOAT	1.00	EA	_____	_____
	Stabilize and prep trim; fully prime/seal and caulk seams; apply full finish coat to match existing color and finish. Consult Minimum Standards for Materials. ALL BASEBOARDS				

Location Total: _____

Location: 3 - Rm #3 Kitchen	Approx. Wall SF: 0	Ceiling/Floor SF: 0
------------------------------------	--------------------	---------------------

Spec #	Spec	Quantity	Units	Unit Price	Total Price
--------	------	----------	-------	------------	-------------

Trade: 9 Environmental Rehab

54	9123-DPD INTERIOR: FULL CONTAIN & CLEAN	1.00	EA	_____	_____
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.				
55	9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT	1.00	EA	_____	_____
	After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block				

Address: 50 Alysworth Avenue			Unit: Unit 2 Front			
Location: 3 - Rm #3 Kitchen		Approx. Wall SF: 0		Ceiling/Floor SF: 0		
Spec #	Spec	Quantity	Units	Unit Price	Total Price	
Trade: 9	Environmental Rehab					
	saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint. SIDE B DOOR JAMB					
				Location Total:		
Location: 4 - Rm #4 Bathroom		Approx. Wall SF: 0		Ceiling/Floor SF: 0		
Spec #	Spec	Quantity	Units	Unit Price	Total Price	
Trade: 9	Environmental Rehab					
56	9129-DPD INTERIOR: FINAL CLEAN	1.00	EA			
	Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6.					
				Location Total:		
Unit Total for 50 Alysworth Avenue, Unit Unit 2 Front:						

Address: 50 Alysworth Avenue			Unit: Unit 2 Rear			
Location:	1 - Rm #1 Bedroom		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
57	9129-DPD INTERIOR: FINAL CLEAN		1.00	EA	_____	_____
	Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6.					
Location Total:						_____
Location:	2 - Rm #2 Kitchen		Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
58	9129-DPD INTERIOR: FINAL CLEAN		1.00	EA	_____	_____
	Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA					

Address: 50 Alysworth Avenue			Unit: Unit 2 Rear			
Location: 2 - Rm #2 Kitchen			Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
	Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6.					
Location Total:						
Location: 3 - Rm #3 Bathroom			Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
59	9129-DPD INTERIOR: FINAL CLEAN		1.00	EA		
	Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6.					
Location Total:						
Location: 4 - Rm #3 Bedroom			Approx. Wall SF: 0		Ceiling/Floor SF: 0	
Spec #	Spec		Quantity	Units	Unit Price	Total Price
Trade: 9	Environmental Rehab					
60	9123-DPD INTERIOR: FULL CONTAIN & CLEAN		1.00	EA		
	Protect occupant's belongings from dust and debris contamination by covering w/ 6 mil. plastic sheeting or by moving furniture and belongings to a safe area. Upon completion of work, remove and dispose of floor and furniture containment and clean to clearance inspection standards. Upon completion of all lead hazard reduction activities and floor/furniture containment removal, HEPA Vac/wet clean/HEPA Vac all surfaces. Repeat cleaning cycle as necessary to achieve clearance inspection standards. Refer to RI Lead Regulations § 13.6. When unit/area is declared lead-safe by inspector and/or program, remove containment barriers and move furniture back into place. 14.8 for containment requirements and Section 13.6 for cleaning and clearance inspection.					
61	9490-DPD DOOR TRIM/JAMB - STABILIZE & RECOAT		1.00	EA		
	After establishing any required floor containment with polyethylene sheeting, wet mist defective paint area with water to the point of saturation. Lightly scrape all loose paint. Feather edges with a wet, 100-grit sponge sanding block saturated with deglossing agent. Wash with detergent solution, rinse, allow to dry and HEPA vacuum any paint chips, dust and debris. Spot prime and top coat with premium acrylic latex paint.					
	SIDE C CLOSET DOOR CASING					

Address: 50 Alysworth Avenue	Unit: Unit 2 Rear
------------------------------	-------------------

Location: 4 - Rm #3 Bedroom	Approx. Wall SF: 0	Ceiling/Floor SF: 0
-----------------------------	--------------------	---------------------

Spec #	Spec	Quantity	Units	Unit Price	Total Price
--------	------	----------	-------	------------	-------------

Location Total: _____

Unit Total for 50 Alysworth Avenue, Unit Unit 2 Rear: _____

Address Grand Total for 50 Alysworth Avenue: _____

Bidder: _____

**CITY OF WOONSOCKET
RHODE ISLAND
FINANCE DEPARTMENT
BID PROPOSAL**

The undersigned bidder has carefully examined the site of the work described herein has become familiar with local conditions and the character and extent of the work/ has carefully examined the Specifications and the site plan the undersigned bidder has provided to date of the contract which are acknowledged to be a part of this proposal/ the special provisions, the proposal form, the form of contract agreement, and form of contract bond, and thoroughly understands their stipulations, requirements and provisions.

The undersigned bidder has determined the quality and quantity of equipment and materials required, has investigated the location, and determined the sources of supply of materials required, has investigated labor conditions, and has arranged for the continuous prosecution of the work herein described.

The undersigned bidder hereby agrees to be bound by the award of the contract and if awarded the contract on this proposal to execute after the notice of award, the required contract agreement and the required contract bond, of which contract this proposal, the plans for the work, and the specifications as above indicated, shall be a part.

The undersigned bidder further agrees to provide all necessary equipment, tools, labor, incidentals and other means of construction to do all the work and furnish all materials of the specified requirements which are necessary to complete the work in accordance with the proposal, the plans and the specifications and agrees to accept therefore, as payment in full, the unit prices for the various items described in the specifications and set forth in the proposal. Any "extra" or "force account work" which includes any Contractor-owned machinery or special equipment other than small tools, for use of which is approved by the Engineer, the hourly rate will not exceed that determined from the latest edition of the "Rental Rate Blue Book for Construction Equipment", will be paid for differing site conditions, changes, extra work and force account work of the standard specifications and the undersigned bidder hereby agrees to accept payment therefore as stated herein.

CERTIFICATION SUMMARY:

The bidder declares that this proposal is made without connection with any other person(s) making proposals for the same specifications and is in all respects fair and without collusion or fraud.

The bidder further declares that, except in the normal discharge of his/her duties, no person acting for or employed by the City of Woonsocket has a direct or indirect interest in the proposal or in any of the profits thereof.

The bidder certifies that the above statements are accurate and true and has carefully examined and read all of the specifications and the contract provisions and understands that it affects the acceptability of my proposal(s).

AUTHORITY TO CONTRACT:

Offeror and the Principal signing on its behalf, certify that it is validly organized with authority to do business and perform the terms hereunder, is qualified to do business in Rhode Island, if applicable, and is not prohibited from entering or performing the terms of this agreement for any reason.

CONFLICT OF INTEREST:

Any Offeror responding to this Invitation to Bid are required to disclose any potential conflict of interest. If the owner of the bidding firm is related to a City of Woonsocket employee, that relationship must be disclosed in writing and made a part of the bid response. Definition Related Person: Related person to a City of Woonsocket employee means a spouse or dependent child of such employee. The term extends to other individuals sharing the same household as well as siblings, parents, and non-dependent children (including step and in-law variations of those relationships) in circumstances where the City of Woonsocket employee has actual knowledge that such relative is likely to or will benefit from a particular City of Woonsocket transaction.

All items in the Proposal must have a unit bid price in words and figures. All unit bid prices must be extended. Bids will not be accepted if they contain no unit price for an item or if they contain zero in words and figures as the unit price bid.

A) Bid Prices for All Items in Numbers for 50 Alysworth Ave, Bid No. 6208 (interior and exterior):

Bid Prices for All Items in Words for 50 Alysworth Ave, Bid No. 6202 (interior and exterior):

We, the undersigned, submit this proposal for Lead Hazard Reduction – 50 Alysworth Ave., Bid No. 6208 for the City of Woonsocket and certify and agree to all the terms and conditions contained herein.

COMPANY NAME:	
ADDRESS:	
CITY, STATE ZIP:	
PHONE:	
EMAIL:	
PRINT NAME:	
TITLE:	
SIGNATURE:	

**LEAD INSPECTION REPORT**Notice to Correct Lead Hazards Y ☒ N ☐ Notice of Violation Y ☐ N ☒**Property Information**

50 Aylsworth Ave.		1R	Woonsocket 02895		
Street Address		Unit	City & Zip Code		
4	7	1910	41-G	121-4	2
# Units	# Rooms	Year Built	Plat	Lot	# Children < 6 Years

Regulated Facility: Y ☒ N ☐ Owner- Occupied Dwelling Unit: Y ☐ N ☒ Owner-Occupied Premises: Y ☐ N ☒**Property Owner Information**

Matthew Vaznaian	
Name(s)	
26 Aylsworth Ave. Apt 1	Woonsocket, RI 02895
Street Address	City, State, Zip Code
Phone	Other Contact

Inspection InformationDate of Initial Inspection: 01/11/24 ☒ Comprehensive ☐ Partial ☐ Clearance ☐ RenewalDate of Follow-up Inspection _____ ☐ Comprehensive ☐ Partial ☐ Clearance ☐ RenewalMedia Tested (check all that apply): ☒ Paint ☒ Dust ☒ Soil ☒ Water

Reason for Inspection (check all that apply):

<input type="checkbox"/> Department of Health Initiated	<input type="checkbox"/> School or Child Care Center
<input type="checkbox"/> HUD	<input type="checkbox"/> Real Estate Transaction
<input checked="" type="checkbox"/> Other Agency <u>City of Woonsocket</u>	<input type="checkbox"/> Private Client – Other _____

Inspection Company Information

Environmental Lead Detection, Inc.	436 Gardners Neck Rd.	
Company Name	Street Address	
Swansea, MA 02777	(508) 674-8730	
City, State, Zip Code	Phone	Other Contact

Lead Inspector Information

John Eastman	
Print Name	Signature
RIDOH License # <u>LI0004</u>	Expiration <u>1/31/2026</u>
	RIDOH License # _____
Print Name of Apprentice (if applicable)	

This inspection was conducted by the above licensed lead professional(s) in accordance with the Rhode Island Department of Health rules and regulations for Lead Poisoning Prevention (216-RICR-50-15-5), as amended.

All property owners must disclose lead inspection results to current/future tenants and prospective buyers.



REQUIRED ACTIONS FOLLOWING INSPECTION

This report documents the findings of the lead inspection for each room or area inspected and all media tested (i.e. paint, dust, soil, water). Each inspection page contains a "Lead" column which indicates whether the surface or media was Lead-Safe (S), Conditionally Lead-Safe (C), or Lead-Hazard (H), as defined below, at the time of the inspection.

Rhode Island Department of Health (RIDOH) Definitions

Lead-Safe means the lead concentration in the paint/media is within the RIDOH Lead-Safe concentration range and no treatments are required. All painted surfaces constructed after 1/1/1978 may be assumed to be Lead-Safe and testing is not required.

Conditionally Lead-Safe means the surface/media requires routine maintenance (i.e. keeping lead painted surfaces intact and soil covered with grass, mulch, etc.) and renewal inspections every two years to recertify the Lead-Safe conditions. The renewal inspections must include a visual inspection of all Conditionally Lead-Safe areas and interior dust wipe sampling by a RIDOH-licensed Lead Inspector.

Assumed Positive means all painted surfaces constructed before 1/1/1978 must be "assumed positive" (AP) for lead, unless determined otherwise by a RIDOH-licensed Lead Inspector.

Lead-Hazard means damaged paint, interior dust, bare soil, or drinking water above the RIDOH Lead-Safe thresholds. The surface/media require treatment in accordance with RIDOH Regulation 216-RICR-50-15-5 – Lead Poisoning Prevention to obtain Lead-Safe, or Conditional Lead-Safe Status.

Regulated Facility means all residential rental units, all properties where a child younger than six years old lives or is expected to live in the next 12 months for 14 or more days per year, and all child care centers including preschools and kindergarten classrooms.

Required Actions if Lead Hazards are Identified at a Regulated Facility

- 1. NOTICE TO CORRECT LEAD HAZARDS:** A Notice to Correct Lead Hazards requires property owners to correct the environmental lead hazards identified in this report within **90 days** of receipt of the notice. (Exterior paint and soil hazards identified between November 1st and March 31st must be corrected by the following June 30th.) Except for "Spot Removal Exemption" areas, a licensed Lead Renovation Firm or Lead Contractor must perform the work.
- 2. NOTICE OF VIOLATION:** A Notice of Violation requires property owners to correct all environmental lead hazards within **30 days** of receipt of the notice. (Exterior paint and soil hazards identified between November 1st and March 31st must be corrected by the following June 30th.) A licensed Lead Contractor must perform the work unless RIDOH approves a variance request in writing.
- 3. EXTENSION:** Property owners may request an extension to the above compliance period(s) by submitting in writing detailed information on the reason(s) for the delay, the person who will correct the hazards, and by what date. Mail requests to the Lead Program Manager, RI Department of Health, Room 206, 3 Capitol Hill, Providence, RI 02908, fax to (401) 222-2456 or 222-7759, or e-mail to doh.leadprogram@health.ri.gov within 20 days of receiving this report.
- 4. SPOT REMOVAL EXEMPTION:** A licensed Lead Renovation Firm or Lead Contractor is not required when the scope of work does not exceed **6 ft² of interior lead-based paint** or **20 ft² of exterior lead-based paint**, provided that the work does not include window replacement or interior demolition and no work practices prohibited by 216-RICR-50-15-12 are used. **A licensed Lead Renovation Firm or Lead Contractor is always required for window replacement or interior demolition.**
- 5. CLEARANCE INSPECTION:** A Clearance Inspection by a Lead Inspector is required when lead hazard reduction or lead hazard control work is completed. This Clearance Inspection must include a visual inspection of all Lead-Hazard areas/media identified in this report and for interior work, **dust wipe sampling** in accordance with 216-RICR-50-15-5. As a minimum, the EPA Cleaning Verification Procedure by a certified Lead Renovator is required for interior renovation, repair, and painting (RRP) work.

- For questions regarding this property and inspection report, lead hazard reduction or lead hazard control options, and regulatory requirements, contact the Lead Inspector listed on page 1 of this report.
- For additional information about lead, including properties with lead violations, and to find a licensed lead professional, call the Center for Healthy Homes and Environment at (401) 222-7796 or visit www.health.ri.gov/healthrisks/poisoning/lead
- For additional requirements regarding rental properties and Certificates of Conformance, call (401) 222-7796 or visit the RIDOH lead certificate page at <https://health.ri.gov/find/environmentallead/propertystatus/>.




FLOOR PLAN PROPERTY SKETCH (BLOCK)

Street Address: 50 Aylsworth Ave. Unit: 1R City: Woonsocket

Floor 1

Floor _____


Side C

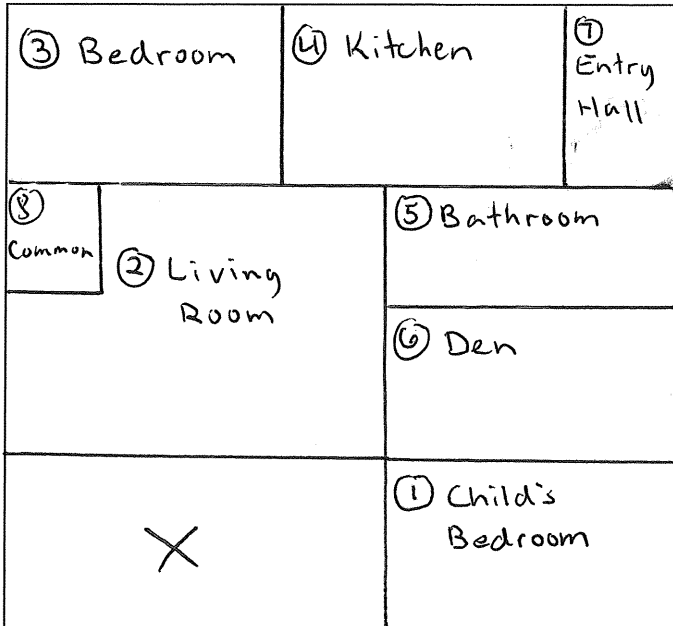

Side A (Address Street)

Floor _____


Side C

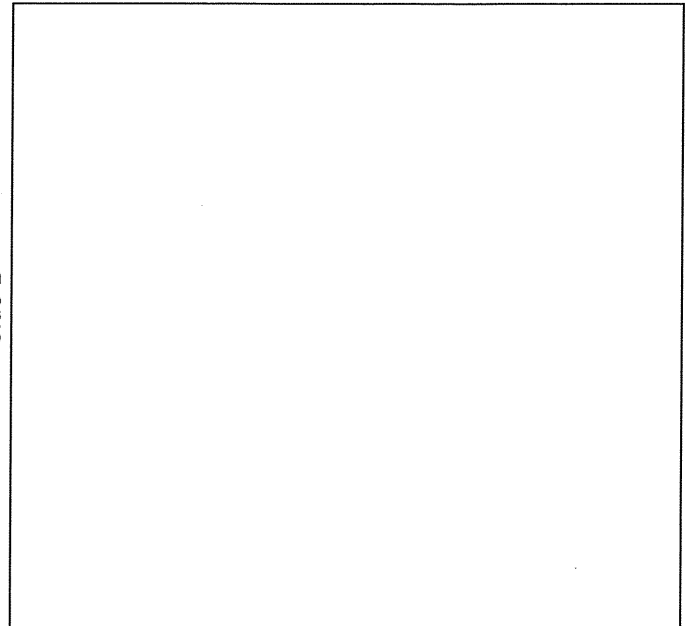

Side A (Address Street)


Floor _____

Side C

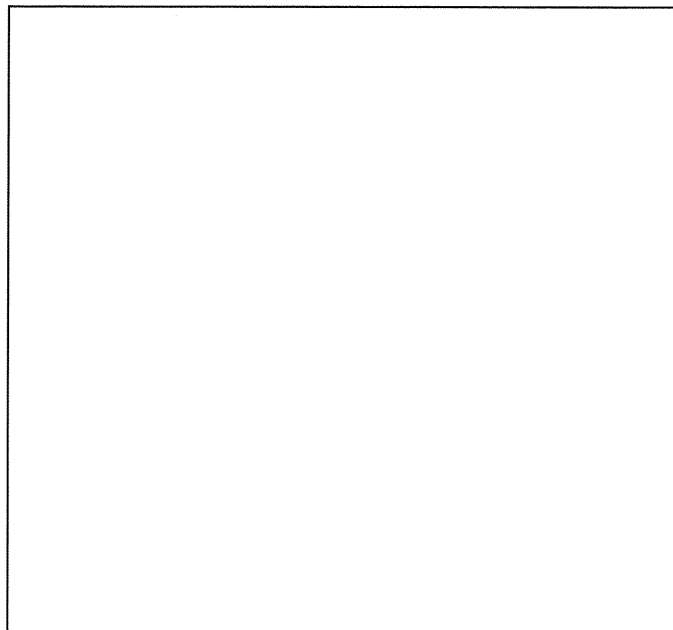

Side A (Address Street)

Side C

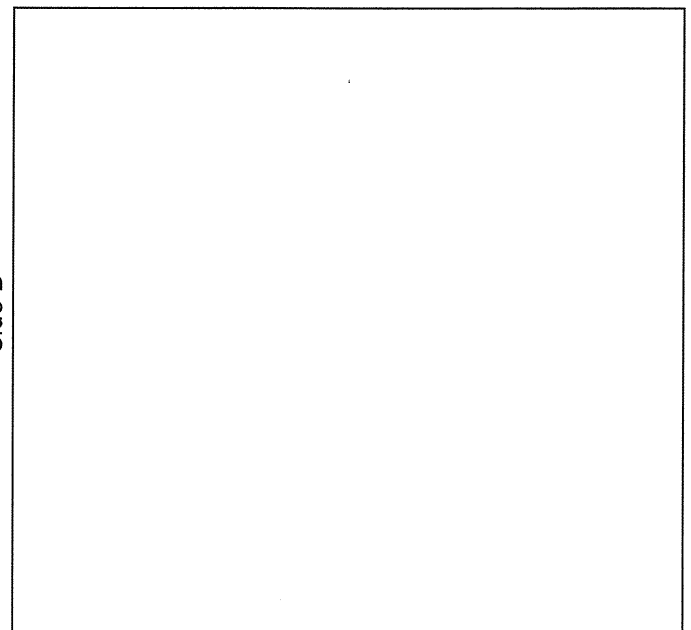


Side A (Address Street)

Initials JEE Date 01/11/24



FLOOR PLAN/PROPERTY SKETCH (GRID)

Street Address: 50 Aylsworth Ave. Unit: 1R City: Woonsocket

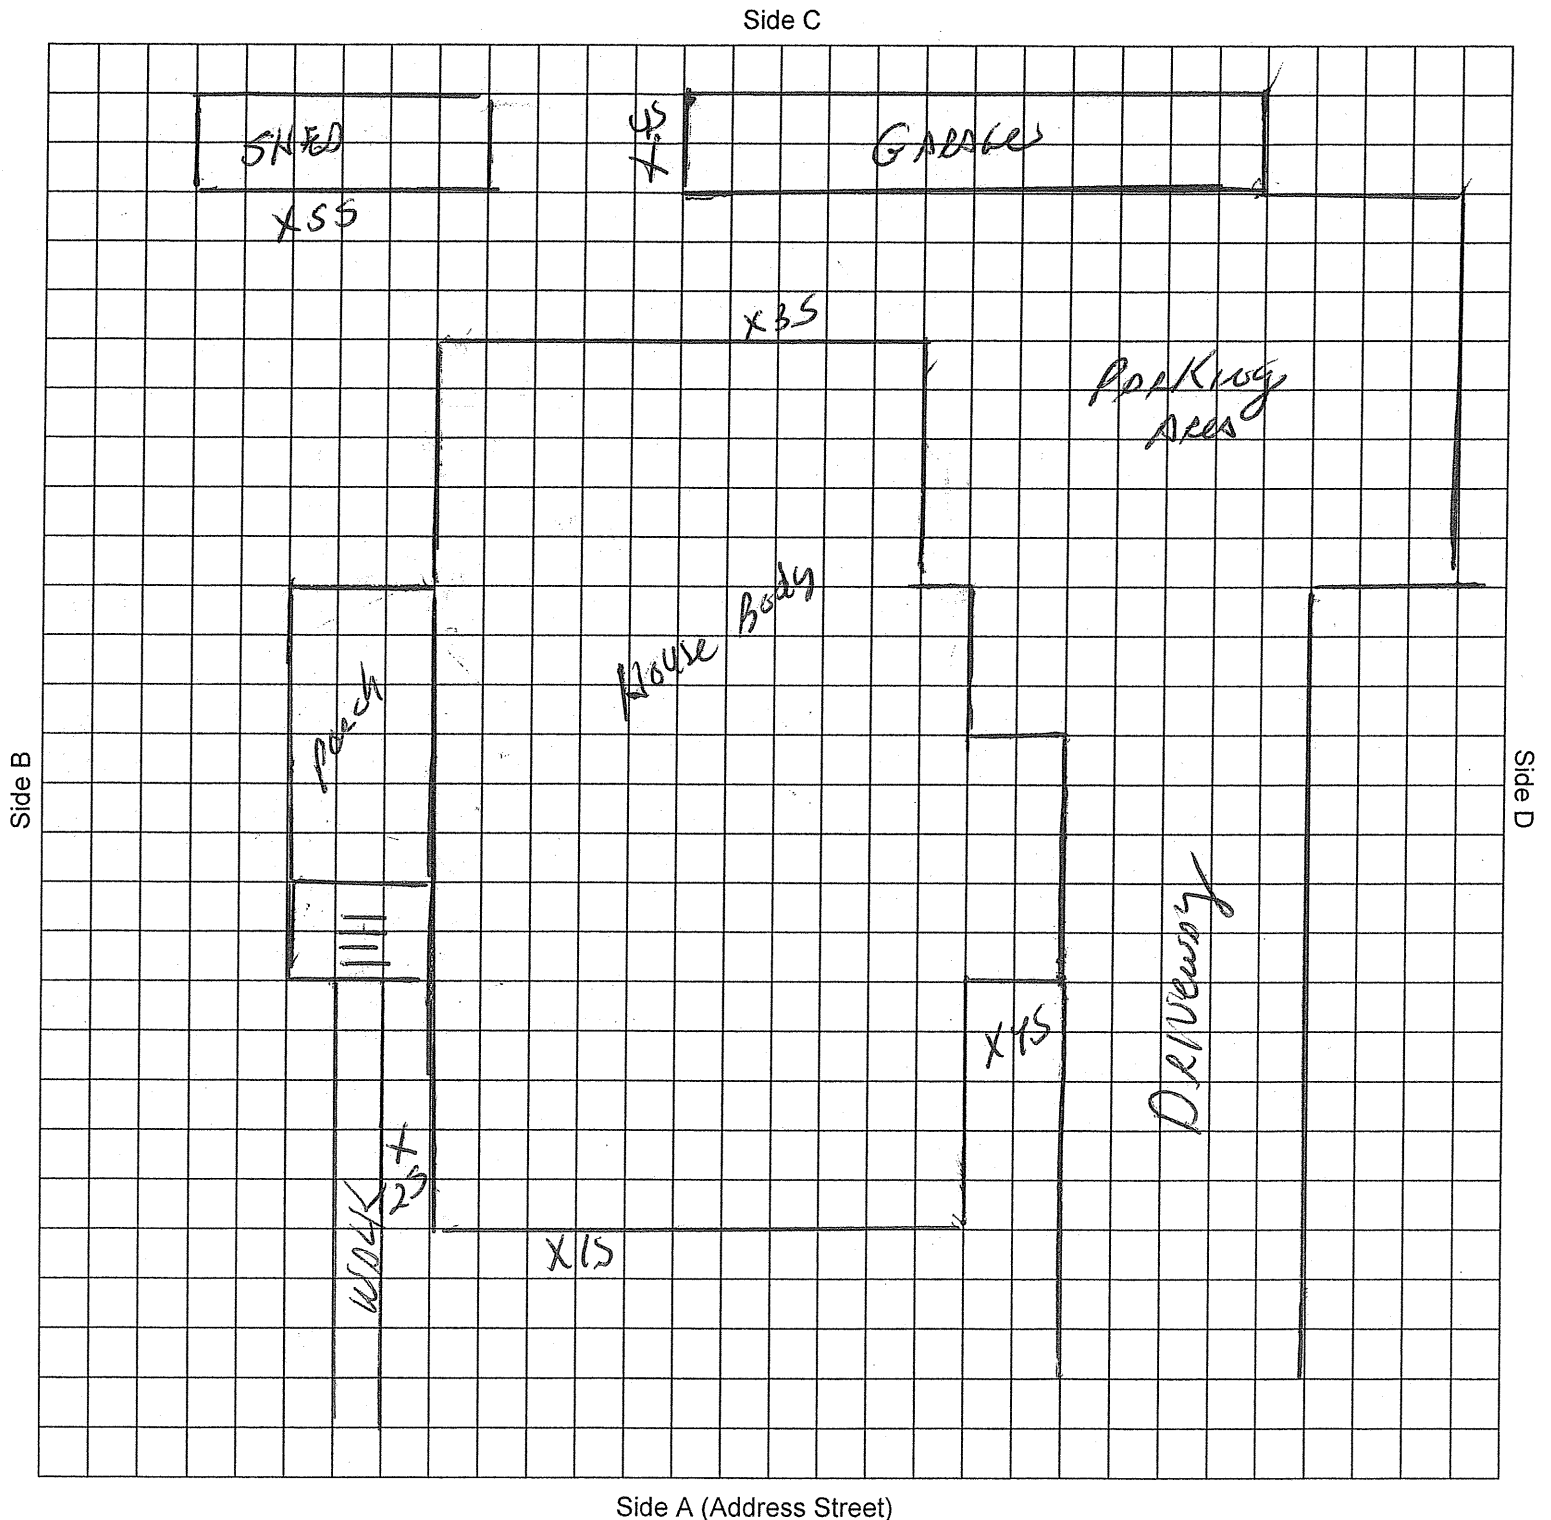

Initials JEE Date 01/11/24

Street Address: 50 Aylsworth Ave. Unit: 1R City: Woonsocket**REPORT KEY**

XRF:

Positive means greater than or equal to 1.0 mg/cm² or **AP** = Assumed Positive for pre-1978 paint
Negative means less than 1.0 mg/cm² or **78** = post-1978 paint
Inconclusive is in accordance with the XRF manufacturer's Performance Characteristic Sheet (PCS)

Test Kit:

Positive reaction (pink or red) is "+" **Inconclusive** (no reaction) is "-"

Paint Chip
Sample:

Lead-Safe means 90 ppm to less than 5,000 ppm or post-1978
Conditionally Lead-Safe means **INTACT** lead-based paint greater than or equal to 5,000 ppm (percent by weight) or 1.0 mg/cm² (by measured area)
Lead-Hazard means **DAMAGED** lead-based paint greater than or equal to 5,000 ppm or 1.0 mg/cm²

Paint
Condition:

N=No Paint **I**=Intact **D**=Damaged **AD**=Assumed Damaged **B**=Binding or Friction

Lead:

S= Lead-Safe **C**=Conditionally Lead-Safe **H**=Lead-Hazard

Remedy:

COV=Covered **MI**=Made Intact **REM**=Removed **REP**=Replaced

XRF CALIBRATION DATAManufacturer, Model & Serial # SciAps X-550 SN 00639Standard Type (check one): Manufacturer ☒ NIST ☐ Other (specify) _____

Standard (mg/cm ²)	Time of Test	Reading 1	Reading 2	Reading 3	Average (mg/cm ²)	Tolerance
1.0	9:02	1.1	1.0	1.1	1.1	0.1
1.0	12:56	1.1	1.0	1.0	1.0	0.0

Comments:

Initials JEEDate 01/11/24

Street Address: 50 Aylsworth Ave.

Unit: 1R City: Woonsocket

Room #: 1 Description: Child's Bedroom

Surface	Side	XRF	Condition	Lead	Remedy
Ceiling		1.5	D	H	
Crown Molding	X				
Wall	A	0.0			
Wall	B	0.1			
Wall	C	0.0			
Wall	D	0.0			
Chair Rail	X				
Baseboard	A11	1.1	AD	H	
Radiator	D	0.0			
Floor		0.0			
Door	C1	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.1			
Threshold	X				
Door	C2		N		
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	C		N		
Casing	↓	0.0			
Closet Jamb	↓	0.0			
Closet Ceiling	↓	1.4	D	H	
Closet Wall	↓	0.1			
Closet Shelf	↓	0.2			
Shelf Support	↓	0.1			
Closet Pole	↓	0.0			
CI Baseboard	↓	1.2	D	H	
Closet Floor	√	0.0			

[illegible]

XRF: Positive $\geq 1.0 \text{ mg/cm}^2$, Test Kit "+" or "AP" = Assumed Positive; Negative $< 1.0 \text{ mg/cm}^2$ or "78" = Post-1978 Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials **JEE** Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 1 of 22Street Address: 50 Aylsworth Ave.Unit: 1R City: WoonsocketRoom #: 2 Description: Living Room

Surface	Side	XRF	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall <u>Upper</u>	A	2.8	I	C	
Wall	B	3.1	I	C	
Wall	C	0.0			
Wall	D	3.0	I	C	
Chair Rail	All	0.5			
Baseboard	All	0.4			
Radiator	B	0.1			
Floor		0.0			
Door	B		N		
Door Casing	All	0.4			
Door Jamb	I	0.0			
Threshold	I	0.1			
Door	↓	0.0			
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	D	0.0			
Casing	I	0.1			
Closet Jamb	I	0.0			
Closet Ceiling	I	0.0			
Closet Wall	I	0.0			
Closet Shelf	I		N		
Shelf Support	↓	0.0			
Closet Pole	X				
Cl Baseboard	D	0.1			
Closet Floor	D	0.0			

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	All	0.6			
Window Apron	X				
Window Casing	All	0.4			
Window Jamb	I	0.2			
Interior Stop	I	0.1			
Interior Sash			N		
Window Well					
Window Track					
Exterior Sash	↓				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Lower Walls	All	0.6			
Shelves	B/C	0.0			
Cabinets	B/C	0.0			

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+" or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978

Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction

S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV =

Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24

Street Address: 50 Aylsworth Ave.

Unit: 1R City: Woonsocket

Room #: 4 Description (check one): ☒ Kitchen ☐ Pantry ☐ Bathroom

Surface	Side	XRF	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall	A	0.1			
Wall	B	0.0			
Wall	C	0.0			
Wall	D	0.0			
Chair Rail	X				
Baseboard	All		N		
Radiator	X				
Floor		CON	1	C	
Door	D	0.0			
Door Casing	↓	0.1			
Door Jamb		0.2			
Threshold	↓	0.0			
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	B	0.0			
Window Apron	↓	0.0			
Window Casing	↓	0.0			
Window Jamb	↓	0.1			
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Window Sill	C	0.0			
Window Apron	↓	0.0			
Window Casing	↓	0.1			
Window Jamb	↓	0.0			
Interior Stop	X				
Interior Sash	C		N		
Window Well	↓		↓		
Window Track	↓				
Exterior Sash	↓		↓		
Exterior Stop	X				
Upper Cab Door	All	P78			
Upper Cab Frame	↓	↓			
Upper Cab Wall	↓	↓			
Upper Cab Shelf	↓	↓			
Shelf Support	↓	↓			
Lower Cab Door	↓	↓			
Lower Cab Frame	↓	↓			
Lower Cab Wall	↓	↓			
Lower Cab Shelf	↓	↓			
Shelf Support	↓	↓			
Cabinet Drawer	↓	↓			
Shelf	B	0.0			

XRF: Positive $\geq 1.0 \text{ mg/cm}^2$, Test Kit "+", or "AP" = Assumed Positive; Negative $< 1.0 \text{ mg/cm}^2$ or "78" = Post-1978

Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction

S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV =

Covered; **MI** = Made Intact; **REM** = Removed; **REP** = Replaced

Initials JEE Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 13 of 22

Street Address: 50 Aylsworth Ave.

Unit: 1R City: Woonsocket

Room #: _____ Description (check one): ☒ Hallway ☒ Staircase (separate page required for each one)

Side Common

Surface	Side	Pb	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall <u>Upper</u>	A	0.0			
Wall	B	0.1			
Wall	C	0.0			
Wall	D	0.0			
Chair Rail	All	0.0			
Baseboard	X				
Radiator	X				
Floor		COV	I	C	
Door <u>1st Floor</u>	A	0.0			
Door Casing	I	0.0			
Door Jamb	I	1.7	D	H	
Threshold	I	1.4	D	H	
Door <u>1st Floor</u>	CID	0.0			
Door Casing	I	0.0			
Door Jamb	I	0.0			
Threshold	D	0.0			
Door <u>2nd Floor</u>	A	0.0			
Door Casing	I	0.1			
Door Jamb	I	1.7	D	H	
Threshold	I	1.8	D	H	
Door <u>2nd Floor</u>	CID	0.0			
Door Casing	I	0.0			
Door Jamb	I	0.0			
Threshold	D	0.1			
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Wall Casing	All	0.0			

Surface	Side	Pb	Condition	Lead	Remedy
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				
Window Sill	C	0.0			
Window Apron	I	0.0			
Window Casing	I	0.0			
Window Jamb	I	0.0			
Interior Stop	I	0.1	Fixed		
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Handrail		0.0			
Newell Post	X				
Stair Tread		COV	I	C	
Stair Riser		0.0			
Baluster	X				
Stringer	X				

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978
 Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
 S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 14 of 22Street Address: 50 Aylsworth Ave.Unit: 1R City: WoonsocketRoom #: _____ Description (check one): ☐ Hallway ☒ Staircase (separate page required for each one)Basement Entry

Surface	Side	Pb	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall <u>Upper</u>	A	0.0			
Wall	B	0.1			
Wall	C	0.0			
Wall	D	0.0			
Chair Rail	All	0.0			
Baseboard	X				
Radiator	X				
Floor		COV	I	C	
Door	A	0.0			
Door Casing	I	0.0			
Door Jamb	I	0.1			
Threshold	X				
Door	C	0.0			
Door Casing	I	0.0			
Door Jamb	I	2.7	D	H	
Threshold	I	0.0			
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	C		N		
Closet Casing	I		N		
Closet Jamb	I		N		
Closet Ceiling	I		N		
Closet Wall	I		N		
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				

Surface	Side	Pb	Condition	Lead	Remedy
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				
Window Sill	B		N		
Window Apron	X				
Window Casing	B	1.1	I	C	
Window Jamb	B	1.6	D	H	
Interior Stop	X				
Interior Sash	B	2.4	D	H	
Window Well	B	2.3	D	H	
Window Track	X				
Exterior Sash	B	6.1	D	H	
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Handrail	X				
Newell Post	X				
Stair Tread	X				
Stair Riser	X				
Baluster	X				
Stringer	X				

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978
 Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
 S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



EXTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 15 of 22

Street Address: 50 Aylsworth Ave.

Unit: 1R City: Woonsocket

Primary Structure: House Body

Surface	Side	XRF	Condition	Lead	Remedy
Siding	All	COV	I	C	
Corner Board	All	COV	I	C	
Upper Trim	All	COV	I	C	
Lower Trim	All	COV	I	C	
Storm Door	C		N		
Door	X				
Door Casing	C1	COV	I	C	
Door Jamb	C1	COV	I	C	
Threshold	C1	12	D	N	
Kick Plate	C1	COV	I	C	
Storm Door	C2		N		
Door	C2	24	I	C	
Door Casing	C2	COV	I	C	
Door Jamb	C2	19.9	D	N	
Threshold	C2	00			
Door Kickplate	X				
Storm Door	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Kick Plate	X				
Overhang	C	00			
Column	X				
Newel Post	X				
Railing Cap	X				
Baluster	X				
Lower Rail	X				
Handrail	A	0.1			
Tread	A	00			
Riser	A	0.1			
Stringer					
Lattice	A/D	15.0	D	H	
Wall	A		N		
Steps	C		N		

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	All	COV	I	C	
Window Casing	I	COV	I	C	
Window Sash	↓		N		
Window Sill	X				
Window Casing	X				
Window Sash 3F	D				
Window Sill	X				
Window Casing	X				
Window Sash	X				
Window Sill	X				
Window Casing	X				
Window Sash	X				
Window Shutter	X				
Fire Escape	D	0.1			
BA Window Sill	All	4.2	D	H	
BA Window Sash	I	1.2	D	H	
BA Window Frame	↓	62	D	H	
BA Screen Frame	↓	0.1			
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
Foundation	All		N		
Bulkhead	X				
Drain Pipe	X				
Electrical Conduit	B/D	0.0			
Lamp Post	X				
Fence	All		N		

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978
Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV =
Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24

**DUST INSPECTION**
 Street Address: 50 Aylsworth Ave. Unit: 1R City: Woonsocket

 Sampling Date: 01/11/24 Analyzing Laboratory or ELPAT Accreditation: Schneider Laboratories Global, Inc

Sample #	Room #/Side	Dust Wipe Surface	*Sample Area (Dimensions)	Lab Result ($\mu\text{g}/\text{ft}^2$)	Lead
1D	Rm 1 / C	Floor	12 x 12	< 5.00	S
2D	Rm 1 / D	Sill	4 1/2 x 32	59.5	S
3D	Rm 2 / B	Floor	12 x 12	< 5.00	S
4D	Rm 2 / B	Sill	4 1/2 x 32	26.0	S
5D	Rm 3 / A	Floor	12 x 12	< 5.00	S
6D	Rm 3 / B	Sill	4 x 31 1/2	< 5.71	S
7D	Rm 6 / B	Floor	12 x 12	< 5.00	S
8D	Rm 6 / D	Sill	4 1/2 x 32	15.7	S
KEY: S = Lead-Safe H = Lead-Hazard *minimum 16 square inches; maximum 2 square feet					

 Comments:

 Initials JEE Date 01/11/24

Street Address: 50 Alysworth Ave. Unit: Commons City: Woonsocket

[illegible]

Initials JEE Date 01/11/24

**SOIL INSPECTION**Street Address: 50 Aylsworth Ave. Unit: 1R City: WoonsocketSampling Date: 01/11/24 Analyzing Laboratory or ELPAT Accreditation: Schneider Laboratories Global, Inc*If soil sampling was not performed, check all reasons that apply:*Covered by Ice/Snow ☐ Covered by Debris ☐ Other ☐ (specify) _____

Sample #	Structure/Area	Side	Distance (ft. or in)	Depth (ft. or in)	Bare (Y or N)	Result (ppm)	Lead
1S	Primary	A	< 3 ft.	1 in.	Y	55.3	S
2S	Primary	B	< 3 ft.	1 in.	Y	1120	H
3S	Primary	C	< 3 ft.	1 in.	Y	319	S
4S	Primary	D	< 3 ft.	1 in.	Y	559	H
	Play Area						
	Mid Yard						
5S	Garage	B	< 3 ft.	1 in.	Y	351	S
6S	Shed	A	< 3 ft.	1 in.	Y	445	H
	Fence						
	Play Equipment						
	Outdoor Furniture						
	Other						
KEY: S = Lead-Safe C = Conditionally Lead-Safe (covered) H = Lead-Hazard							

Indicate location(s) of soil sample collection on Form PBLC-23-3

Comments:

Initials JEE Date 01/11/24

**WATER INSPECTION**Street Address: 50 Aylsworth Ave. Unit: 1R City: WoonsocketSampling Date: 01/11/24 Analyzing Laboratory: Schneider Laboratories Global, Inc**Water Source:** Public Water Supplier: City of Woonsocket ☐ Private Well ☐ Unknown ☐(Check all that apply): Lead Service Line ☐ Lead Pipe / Gooseneck ☐ Non-Lead Service Line ☐ Unknown ☒

Sample #	Room #/Fixture	*First Draw (Y/N)	**Flushed Sample (Y/N)	Result (ppb)	Lead Hazard (Y/N)
2W	Kitchen Faucet	N	Y	< 5.00	N
*First Draw Sample: Has it been at least 6 hours since any water was last used? **Flushed Sample: Collected after one minute or until water turns cold					

RIDOH RECOMMENDED ACTIONS (Check all that apply):

- ☒ Use only cold water for drinking and cooking.
- ☒ Do not consume water without flushing until temperature drops.
- ☐ Do not consume water until lead level(s) <15 ppb is achieved.
- ☐ Owner must provide bottled water for cooking and drinking until RIDOH approves additional lead sampling results.
- ☐ Owner must label all taps "Lead Warning: Do not use for drinking or cooking".
- ☐ Filtration systems must be maintained and filters replaced per manufacturer's instructions.
- ☐ Other (specify) _____

Comments:Initials JEE Date 01/11/24



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475**Customer** ENVIRONMENTAL LEAD DETECTION (482)
Address 436 Gardners Neck Rd
Swansea, MA 02777-3105**Order #:** 546691**Matrix** Wipe
Received 01/16/24
Analyzed 01/16/24
Reported 01/18/24**Project** 50 Aylsworth Ave Apt 1 Rear
Location Woonsocket
Number

Sample ID	Cust. Sample ID	Location	Sample Date			
Parameter		Method	Area	Total	Conc.	RL*
546691-001	1D	Rm 1 Floor Side C	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546691-002	2D	Rm 1 Sill Side D	01/11/24			
Lead		EPA 7000B	1.00 ft2	59.5 µg/wipe	59.5 µg/ft2	5.00 µg/ft2
546691-003	3D	Rm 2 Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546691-004	4D	Rm 2 Sill Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	26.0 µg/wipe	26.0 µg/ft2	5.00 µg/ft2
546691-005	5D	Rm 3 Floor Side A	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546691-006	6D	Rm 3 Sill Side B	01/11/24			
Lead		EPA 7000B	0.875 ft2	<5.00 µg/wipe	<5.71 µg/ft2	5.71 µg/ft2
546691-007	7D	Rm 6 Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546691-008	8D	Rm 6 Sill Side D	01/11/24			
Lead		EPA 7000B	1.00 ft2	15.7 µg/wipe	15.7 µg/ft2	5.00 µg/ft2

Analyst SA
546691-01/18/24 11:00 AMReviewed By **Ahmed Elnasseh**
Analyst**EPA Lead Clearance as of 1/1/2024**

Location	Level	Unit
Floors	< 10.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 400	µg/ft2

HUD Lead Clearance as of 1/1/2024

Location	Level	Unit
Interior Floors	< 10.0	µg/ft2
Porch Floors	< 40.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 100	µg/ft2

Minimum Total Reporting Limit: 5.0 µg/wipe. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer ENVIRONMENTAL LEAD DETECTION (482)
Address 436 Gardners Neck Rd
Swansea, MA 02777-3105

Order #: 546693

Matrix Wipe
Received 01/16/24
Analyzed 01/16/24
Reported 01/17/24

Project 50 Aylsworth Ave Side Common
Location Woonsocket
Number

Sample ID	Cust. Sample ID	Location	Sample Date			
Parameter		Method	Area	Total	Conc.	RL*
546693-001	9D	Common Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	777 µg/wipe	777 µg/ft2	25.0 µg/ft2
546693-002	10D	Common Sill Side C	01/11/24			
Lead		EPA 7000B	0.750 ft2	65.1 µg/wipe	86.7 µg/ft2	6.67 µg/ft2
546693-003	11D	Blank	01/11/24			
Lead		EPA 7000B		<5.00 µg/wipe		5.00 µg/wipe

Analyst SA
546693-01/17/24 01:34 PM

Reviewed By **Ahmed Elnasseh**
Analyst

EPA Lead Clearance as of 1/1/2024

Location	Level	Unit
Floors	< 10.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 400	µg/ft2

HUD Lead Clearance as of 1/1/2024

Location	Level	Unit
Interior Floors	< 10.0	µg/ft2
Porch Floors	< 40.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 100	µg/ft2

Minimum Total Reporting Limit: 5.0 µg/wipe. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475**Customer:** ENVIRONMENTAL LEAD DETECTION (482)
Address: 436 Gardners Neck Rd
Swansea, MA 02777-3105**Order #:** 546684**Matrix** Soil
Received 01/16/24
Analyzed 01/16/24
Reported 01/16/24**Attn:**
Project: 50 Alysworth Ave
Location: Woonsocket
Number:**PO Number:**

Sample ID	Cust. Sample ID	Location	Sample Date	Weight			
Parameter		Method		Total µg	% / Wt.	Conc.	RL*
546684-001	1S	Side A	01/11/24	1110 mg			
Lead		EPA 7000B		61.2 µg	0.00553 %	55.3 mg/kg	9.03 mg/kg
546684-002	2S	Side B	01/11/24	1110 mg			
Lead		EPA 7000B		1240 µg	0.112 %	1120 mg/kg	45.1 mg/kg
546684-003	3S	Side C	01/11/24	1100 mg			
Lead		EPA 7000B		352 µg	0.0319 %	319 mg/kg	9.08 mg/kg
546684-004	4S	Side D	01/11/24	1020 mg			
Lead		EPA 7000B		569 µg	0.0559 %	559 mg/kg	19.6 mg/kg
546684-005	5S	Garage Side B	01/11/24	1110 mg			
Lead		EPA 7000B		391 µg	0.0351 %	351 mg/kg	8.98 mg/kg
546684-006	6S	Shed Side A	01/11/24	1110 mg			
Lead		EPA 7000B		495 µg	0.0445 %	445 mg/kg	18.0 mg/kg

Analyst: SA
546684-01/16/24 04:33 PM*Kelly Muncy*Reviewed By: Kelly Muncy
Manager**EPA Lead in Residential Soil as of 1/1/24**

Location	Level	Unit
Play Areas	400	mg/kg
Bare Soil Average	1200	mg/kg

Minimum reporting limit: 10.0 µg. EPA does not distinguish between lead-contaminated soil and soil-lead hazards. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Values are reported to three significant figures. PPM = mg/kg | PPB = µg/kg. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer: ENVIRONMENTAL LEAD DETECTION (482)
Address: 436 Gardners Neck Rd
Swansea, MA 02777-3105

Order #: 546692

Matrix Drinking Water
Received 01/16/24
Reported 01/18/24

Attn:
Project: 50 Aylsworth
Location: Woonsocket
Number:

PO Number:

Sample ID	Cust. Sample ID	Location	Result	RL*	Units	Analysis Date	Analyst
Parameter		Method					
546692-001	1W	Kitchen Faucet Ap 1 Front					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA
546692-002	2W	Kitchen Faucet Ap 1 Rear					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA
546692-004	4W	Kitchen Faucet Ap 2 Rear					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA

546692-01/18/24 12:59 PM

Kelly Muncy

Reviewed By: **Kelly Muncy**
Manager

EPA Regulatory Limits

Parameter	Reg. Limit	Unit
Lead	15.0	µg/L

State Certifications

Method	Parameter	Rhode Island	Virginia
EPA 200.9 Rev 2.2	Lead	ELAP Certified	VELAP Certified
State	Certificate Number		
Rhode Island	ELAP LAO00084		
Virginia	VELAP 12664		

All internal QC parameters were met. Unusual sample conditions, if any, are described. Surrogate Spike results designated with "D" indicate that the analyte was diluted out. "MI" indicates matrix interference. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. Solid PPM = mg/kg | PPB = µg/kg and Water PPM = mg/L | PPB = µg/L. The test results apply to the sample as received.

**LEAD INSPECTION REPORT**Notice to Correct Lead Hazards Y ☒ N ☐ Notice of Violation Y ☐ N ☒**Property Information**

50 Aylsworth Ave.		1R	Woonsocket 02895		
Street Address		Unit	City & Zip Code		
4	7	1910	41-G	121-4	2
# Units	# Rooms	Year Built	Plat	Lot	# Children < 6 Years

Regulated Facility: Y ☒ N ☐ Owner- Occupied Dwelling Unit: Y ☐ N ☒ Owner-Occupied Premises: Y ☐ N ☒**Property Owner Information**

Matthew Vaznaian	
Name(s)	
26 Aylsworth Ave. Apt 1	Woonsocket, RI 02895
Street Address	City, State, Zip Code
Phone	Other Contact

Inspection InformationDate of Initial Inspection: 01/11/24 ☒ Comprehensive ☐ Partial ☐ Clearance ☐ RenewalDate of Follow-up Inspection _____ ☐ Comprehensive ☐ Partial ☐ Clearance ☐ RenewalMedia Tested (check all that apply): ☒ Paint ☒ Dust ☒ Soil ☒ Water

Reason for Inspection (check all that apply):

<input type="checkbox"/> Department of Health Initiated	<input type="checkbox"/> School or Child Care Center
<input type="checkbox"/> HUD	<input type="checkbox"/> Real Estate Transaction
<input checked="" type="checkbox"/> Other Agency <u>City of Woonsocket</u>	<input type="checkbox"/> Private Client – Other _____

Inspection Company Information

Environmental Lead Detection, Inc.	436 Gardners Neck Rd.	
Company Name	Street Address	
Swansea, MA 02777	(508) 674-8730	
City, State, Zip Code	Phone	Other Contact

Lead Inspector Information

John Eastman	
Print Name	Signature
RIDOH License # <u>LI0004</u>	Expiration <u>1/31/2026</u>
	RIDOH License # _____
Print Name of Apprentice (if applicable)	

This inspection was conducted by the above licensed lead professional(s) in accordance with the Rhode Island Department of Health rules and regulations for Lead Poisoning Prevention (216-RICR-50-15-5), as amended.

All property owners must disclose lead inspection results to current/future tenants and prospective buyers.



REQUIRED ACTIONS FOLLOWING INSPECTION

This report documents the findings of the lead inspection for each room or area inspected and all media tested (i.e. paint, dust, soil, water). Each inspection page contains a "Lead" column which indicates whether the surface or media was Lead-Safe (S), Conditionally Lead-Safe (C), or Lead-Hazard (H), as defined below, at the time of the inspection.

Rhode Island Department of Health (RIDOH) Definitions

Lead-Safe means the lead concentration in the paint/media is within the RIDOH Lead-Safe concentration range and no treatments are required. All painted surfaces constructed after 1/1/1978 may be assumed to be Lead-Safe and testing is not required.

Conditionally Lead-Safe means the surface/media requires routine maintenance (i.e. keeping lead painted surfaces intact and soil covered with grass, mulch, etc.) and renewal inspections every two years to recertify the Lead-Safe conditions. The renewal inspections must include a visual inspection of all Conditionally Lead-Safe areas and interior dust wipe sampling by a RIDOH-licensed Lead Inspector.

Assumed Positive means all painted surfaces constructed before 1/1/1978 must be "assumed positive" (AP) for lead, unless determined otherwise by a RIDOH-licensed Lead Inspector.

Lead-Hazard means damaged paint, interior dust, bare soil, or drinking water above the RIDOH Lead-Safe thresholds. The surface/media require treatment in accordance with RIDOH Regulation 216-RICR-50-15-5 – Lead Poisoning Prevention to obtain Lead-Safe, or Conditional Lead-Safe Status.

Regulated Facility means all residential rental units, all properties where a child younger than six years old lives or is expected to live in the next 12 months for 14 or more days per year, and all child care centers including preschools and kindergarten classrooms.

Required Actions if Lead Hazards are Identified at a Regulated Facility

- 1. NOTICE TO CORRECT LEAD HAZARDS:** A Notice to Correct Lead Hazards requires property owners to correct the environmental lead hazards identified in this report within **90 days** of receipt of the notice. (Exterior paint and soil hazards identified between November 1st and March 31st must be corrected by the following June 30th.) Except for "Spot Removal Exemption" areas, a licensed Lead Renovation Firm or Lead Contractor must perform the work.
- 2. NOTICE OF VIOLATION:** A Notice of Violation requires property owners to correct all environmental lead hazards within **30 days** of receipt of the notice. (Exterior paint and soil hazards identified between November 1st and March 31st must be corrected by the following June 30th.) A licensed Lead Contractor must perform the work unless RIDOH approves a variance request in writing.
- 3. EXTENSION:** Property owners may request an extension to the above compliance period(s) by submitting in writing detailed information on the reason(s) for the delay, the person who will correct the hazards, and by what date. Mail requests to the Lead Program Manager, RI Department of Health, Room 206, 3 Capitol Hill, Providence, RI 02908, fax to (401) 222-2456 or 222-7759, or e-mail to doh.leadprogram@health.ri.gov within 20 days of receiving this report.
- 4. SPOT REMOVAL EXEMPTION:** A licensed Lead Renovation Firm or Lead Contractor is not required when the scope of work does not exceed **6 ft² of interior lead-based paint** or **20 ft² of exterior lead-based paint**, provided that the work does not include window replacement or interior demolition and no work practices prohibited by 216-RICR-50-15-12 are used. **A licensed Lead Renovation Firm or Lead Contractor is always required for window replacement or interior demolition.**
- 5. CLEARANCE INSPECTION:** A Clearance Inspection by a Lead Inspector is required when lead hazard reduction or lead hazard control work is completed. This Clearance Inspection must include a visual inspection of all Lead-Hazard areas/media identified in this report and for interior work, **dust wipe sampling** in accordance with 216-RICR-50-15-5. As a minimum, the EPA Cleaning Verification Procedure by a certified Lead Renovator is required for interior renovation, repair, and painting (RRP) work.

- For questions regarding this property and inspection report, lead hazard reduction or lead hazard control options, and regulatory requirements, contact the Lead Inspector listed on page 1 of this report.
- For additional information about lead, including properties with lead violations, and to find a licensed lead professional, call the Center for Healthy Homes and Environment at (401) 222-7796 or visit www.health.ri.gov/healthrisks/poisoning/lead
- For additional requirements regarding rental properties and Certificates of Conformance, call (401) 222-7796 or visit the RIDOH lead certificate page at <https://health.ri.gov/find/environmentallead/propertystatus/>.




FLOOR PLAN PROPERTY SKETCH (BLOCK)

Street Address: 50 Aylsworth Ave. Unit: 1R City: Woonsocket


Floor 1

Floor _____

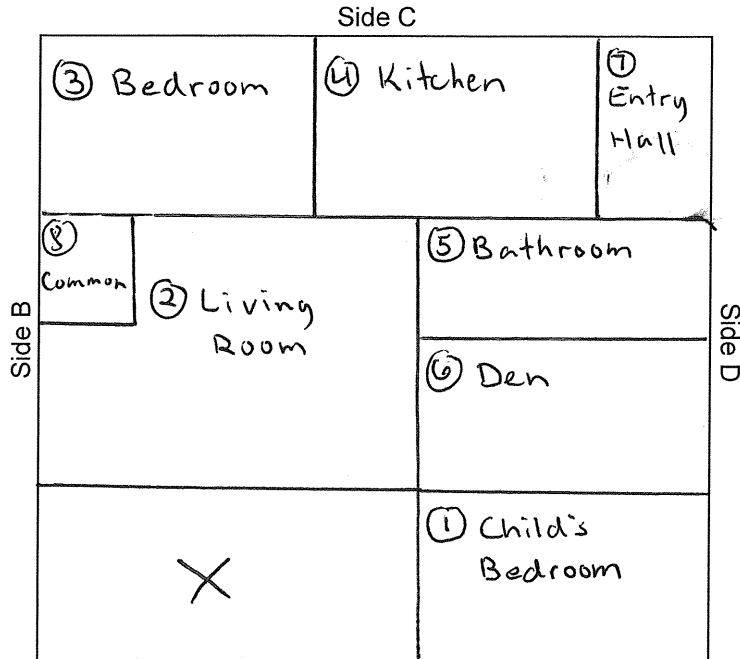


Side A (Address Street)

Floor _____

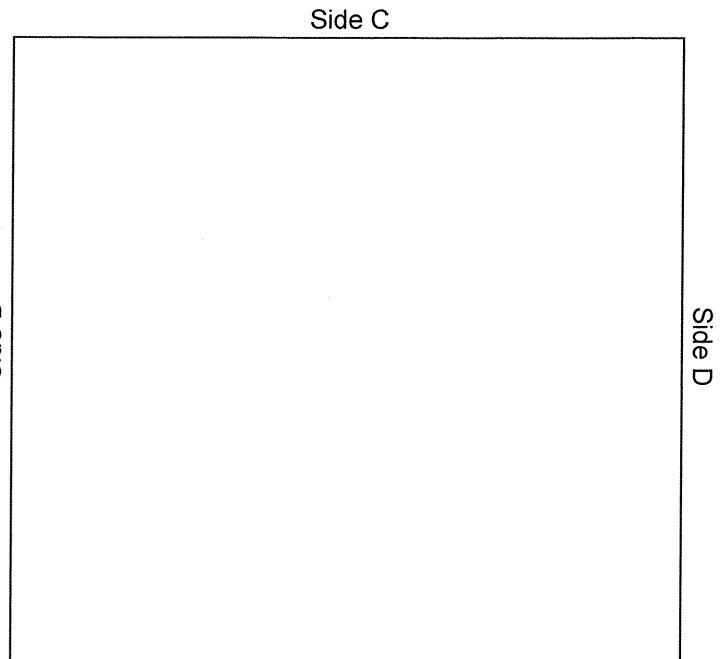


Side A (Address Street)

Floor _____

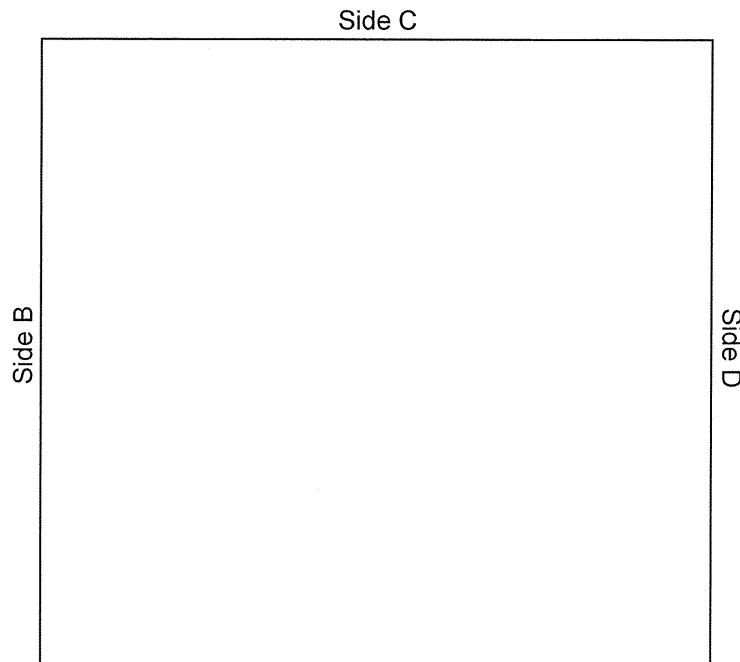

Side A (Address Street)

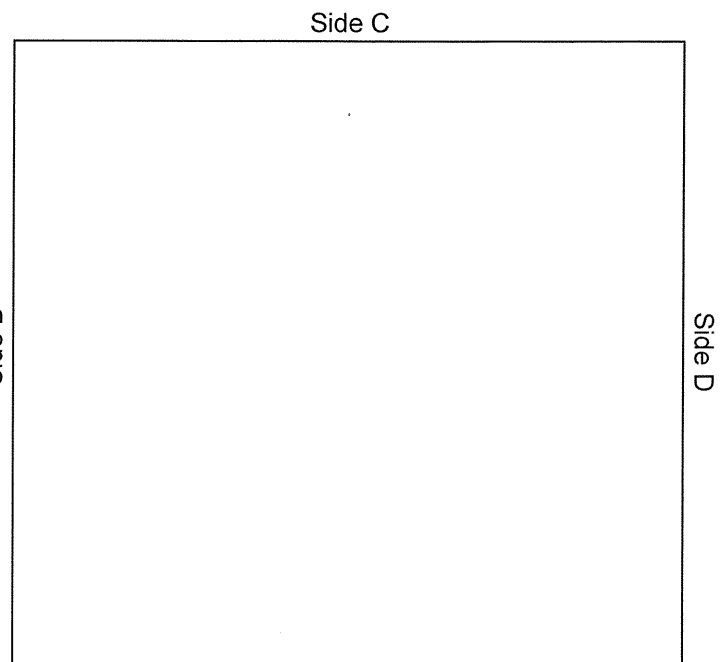


Side A (Address Street)

Initials JEE Date 01/11/24



FLOOR PLAN/PROPERTY SKETCH (GRID)

Street Address: 50 Aylsworth Ave. Unit: 1R City: Woonsocket

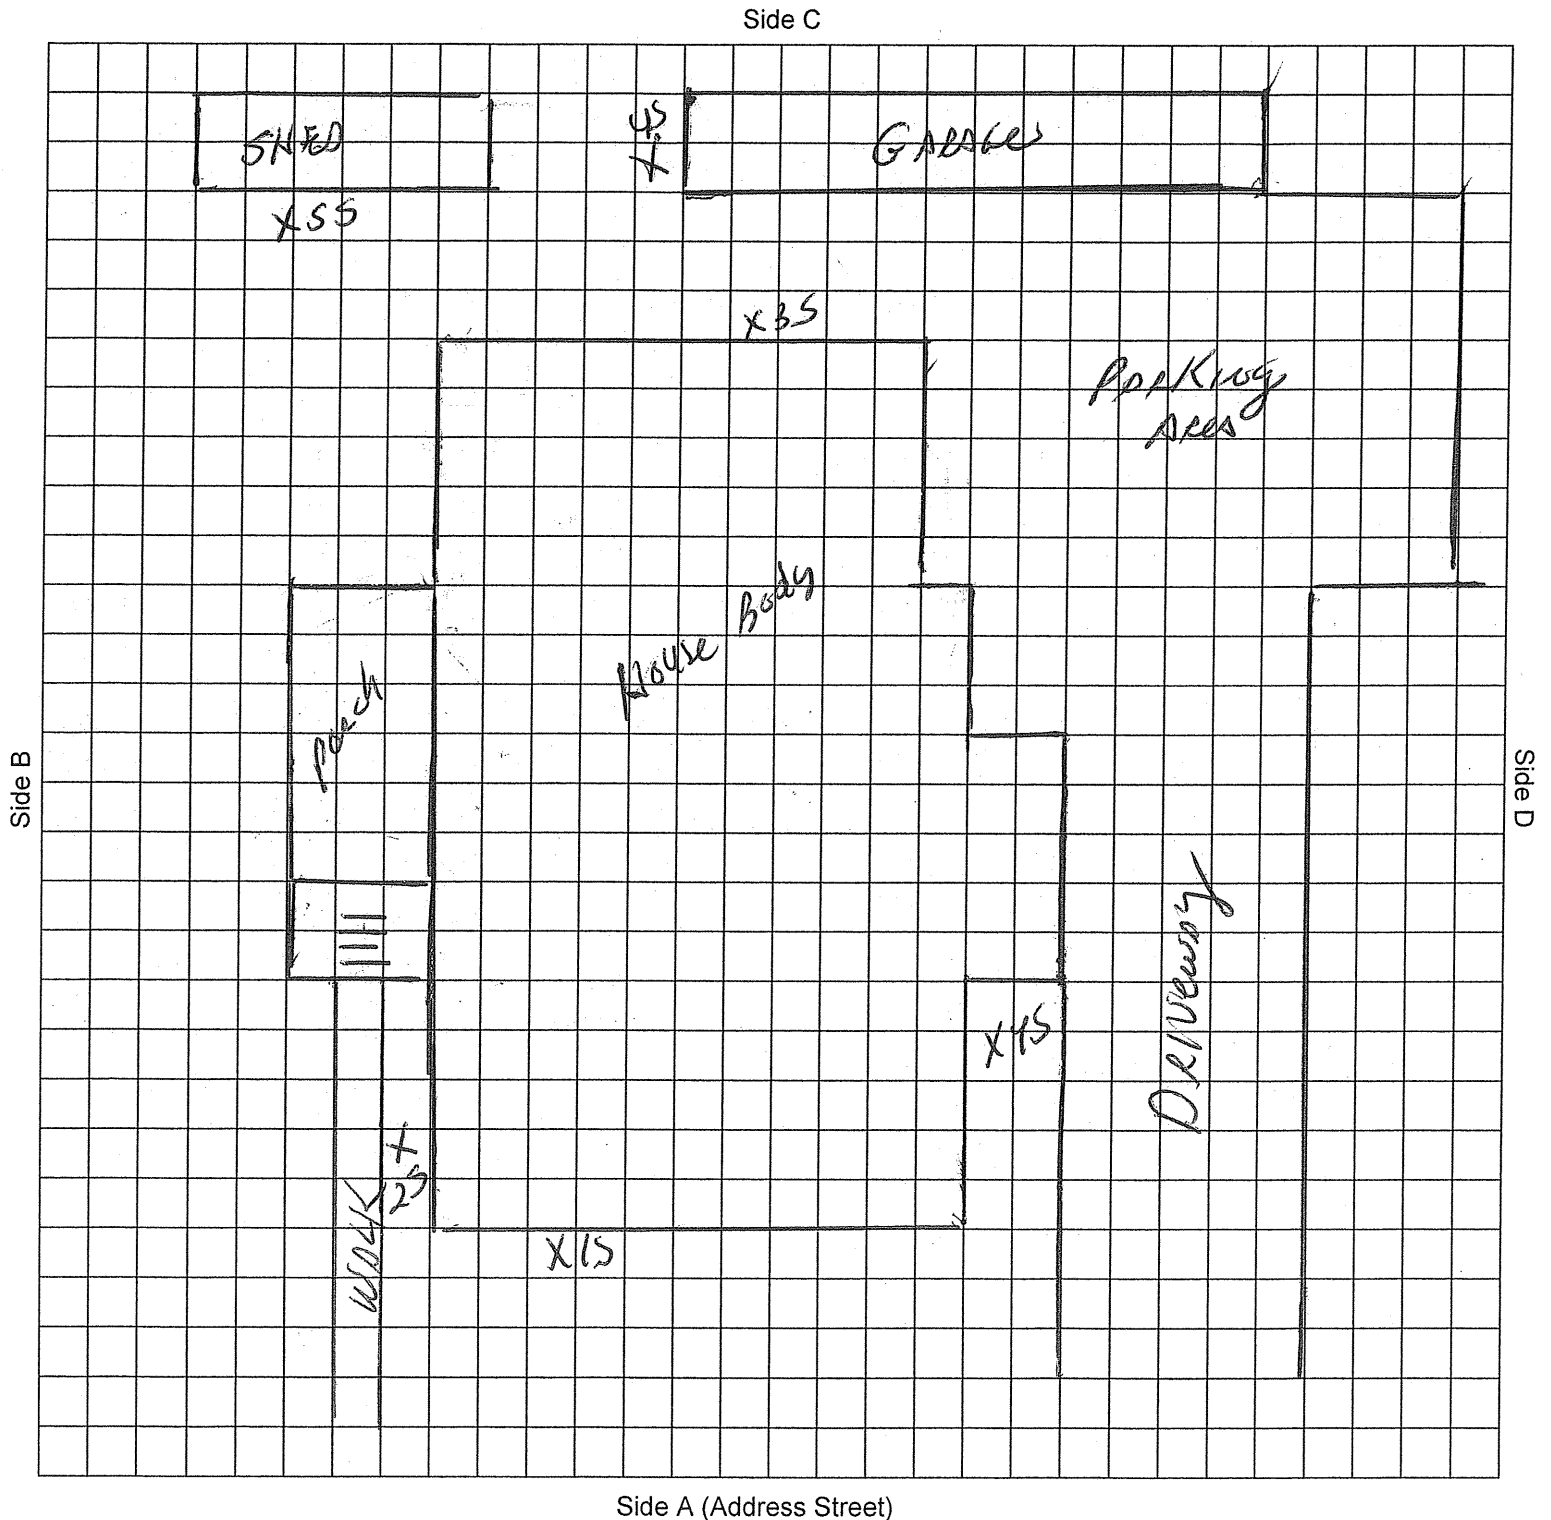

Initials JEE Date 01/11/24

Street Address: 50 Aylsworth Ave. Unit: 1R City: Woonsocket**REPORT KEY**

XRF:

Positive means greater than or equal to 1.0 mg/cm² or **AP** = Assumed Positive for pre-1978 paint
Negative means less than 1.0 mg/cm² or **78** = post-1978 paint
Inconclusive is in accordance with the XRF manufacturer's Performance Characteristic Sheet (PCS)

Test Kit:

Positive reaction (pink or red) is "+" **Inconclusive** (no reaction) is "-"

Paint Chip
Sample:

Lead-Safe means 90 ppm to less than 5,000 ppm or post-1978
Conditionally Lead-Safe means **INTACT** lead-based paint greater than or equal to 5,000 ppm
(percent by weight) or 1.0 mg/cm² (by measured area)
Lead-Hazard means **DAMAGED** lead-based paint greater than or equal to 5,000 ppm or 1.0 mg/cm²

Paint
Condition:

N=No Paint **I**=Intact **D**=Damaged **AD**=Assumed Damaged **B**=Binding or Friction

Lead:

S= Lead-Safe **C**=Conditionally Lead-Safe **H**=Lead-Hazard

Remedy:

COV=Covered **MI**=Made Intact **REM**=Removed **REP**=Replaced

XRF CALIBRATION DATAManufacturer, Model & Serial # SciAps X-550 SN 00639Standard Type (check one): Manufacturer ☒ NIST ☐ Other (specify) _____

Standard (mg/cm ²)	Time of Test	Reading 1	Reading 2	Reading 3	Average (mg/cm ²)	Tolerance
1.0	9:02	1.1	1.0	1.1	1.1	0.1
1.0	12:56	1.1	1.0	1.0	1.0	0.0

Comments:

Initials JEEDate 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 6 of 23

Street Address: 50 Aylsworth Ave.

Unit: 1R City: Woonsocket

Room #: 1 Description: Child's Bedroom

Surface	Side	XRF	Condition	Lead	Remedy
Ceiling		1.5	D	H	
Crown Molding	X				
Wall	A	0.0			
Wall	B	0.1			
Wall	C	0.0			
Wall	D	0.0			
Chair Rail	X				
Baseboard	All	1.1	AD	H	
Radiator	D	0.0			
Floor		0.0			
Door	C1	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.1			
Threshold	X				
Door	C2		N		
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	C		N		
Casing	↓	0.0			
Closet Jamb	↓	0.0			
Closet Ceiling	↓	1.4	D	H	
Closet Wall	↓	0.1			
Closet Shelf	↓	0.2			
Shelf Support	↓	0.1			
Closet Pole	↓	0.0			
Cl Baseboard	↓	1.2	D	H	
Closet Floor	↓	0.0			

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	All	1.4	I	C	
Window Apron	↓	2.3	I	C	
Window Casing	↓	1.8	I	C	
Window Jamb	↓	4.6	I	C	
Interior Stop	↓	2.4	I	C	
Interior Sash	↓		N		
Window Well	↓				
Window Track	↓				
Exterior Sash	↓				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				

XRF: Positive $\geq 1.0 \text{ mg/cm}^2$, Test Kit "+", or "AP" = Assumed Positive; Negative $< 1.0 \text{ mg/cm}^2$ or "78" = Post-1978
 Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
 S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV =
 Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 10 of 22Street Address: 50 Aylsworth Ave.Unit: 1R City: WoonsocketRoom #: 5 Description (check one): ☐ Kitchen ☐ Pantry ☒ Bathroom

Surface	Side	XRF	Condition	Lead	Remedy
Ceiling		COV	D	H	
Crown Molding	All	0.0			
Wall	A	0.1			
Wall	B	0.1			
Wall	C	0.0			
Wall	D	0.0			
Chair Rail	X				
Baseboard	All	0.1			
Radiator	X				
Floor		COV	I	C	
Door	All	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	B1	0.0			
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	B	0.0			
Closet Casing	X				
Closet Jamb	B	0.0			
Closet Ceiling	↓	0.1			
Closet Wall	↓	0.0			
Closet Shelf	↓	0.0			
Shelf Support	↓	0.0			
Closet Pole	X				
Cl Baseboard	B	0.0			
Closet Floor	B	COV	I	C	

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	D	0.0			
Window Apron	↓	0.0			
Window Casing	↓	0.1			
Window Jamb	↓	0.0			
Interior Stop	X				
Interior Sash	D		N		
Window Well	↓		↓		
Window Track	↓				
Exterior Sash	↓		↓		
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Upper Cab Door	All	P78			
Upper Cab Frame	↓	↓			
Upper Cab Wall	↓	↓			
Upper Cab Shelf	↓	↓			
Shelf Support	↓	↓			
Lower Cab Door	↓	↓			
Lower Cab Frame	↓	↓			
Lower Cab Wall	↓	↓			
Lower Cab Shelf	↓	↓			
Shelf Support	↓	↓			
Cabinet Drawer	↓	↓			

XRF: Positive $\geq 1.0 \text{ mg/cm}^2$, Test Kit "+", or "AP" = Assumed Positive; Negative $< 1.0 \text{ mg/cm}^2$ or "78" = Post-1978
Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 13 of 22

Street Address: 50 Aylsworth Ave.

Unit: 1R City: Woonsocket

Room #: _____ Description (check one): ☒ Hallway ☒ Staircase (separate page required for each one)

Side Common

Surface	Side	Pb	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall <u>Upper</u>	A	0.0			
Wall <u>↓</u>	B	0.1			
Wall <u>↓</u>	C	0.0			
Wall <u>↓</u>	D	0.0			
Chair Rail	All	0.0			
Baseboard	X				
Radiator	X				
Floor		COV	I	C	
Door <u>1st Floor</u>	A	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	1.7	D	H	
Threshold	↓	1.4	D	H	
Door <u>1st Floor</u>	CID	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	D	0.0			
Door <u>2nd Floor</u>	A	0.0			
Door Casing	↓	0.1			
Door Jamb	↓	1.7	D	H	
Threshold	↓	1.8	D	H	
Door <u>2nd Floor</u>	CID	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	D	0.1			
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Wall Casing	All	0.0			

Surface	Side	Pb	Condition	Lead	Remedy
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				
Window Sill	C	0.0			
Window Apron	↓	0.0			
Window Casing	↓	0.0			
Window Jamb	↓	0.0			
Interior Stop	↓	0.1	Fixed		
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Handrail		0.0			
Newell Post	X				
Stair Tread		COV	I	C	
Stair Riser		0.0			
Baluster	X				
Stringer	X				

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978
 Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
 S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 14 of 22

Street Address: 50 Aylsworth Ave.

Unit: 1B City: Woonsocket

Room #: _____ Description (check one): ☐ Hallway ☒ Staircase (separate page required for each one)

Basement Entry

Surface	Side	Pb	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall <u>Upper</u>	A	0.0			
Wall <u>↓</u>	B	0.1			
Wall <u>↓</u>	C	0.0			
Wall <u>↓</u>	D	0.0			
Chair Rail	All	0.0			
Baseboard	X				
Radiator	X				
Floor		COV	I	C	
Door	A	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.1			
Threshold	X				
Door	C	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	2.7	D	H	
Threshold	↓	0.0			
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	C		N		
Closet Casing	↓		N		
Closet Jamb	↓		N		
Closet Ceiling	↓		N		
Closet Wall	↓		N		
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				

Surface	Side	Pb	Condition	Lead	Remedy
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				
Window Sill	B		N		
Window Apron	X				
Window Casing	B	1.1	I	C	
Window Jamb	B	1.6	D	H	
Interior Stop	X				
Interior Sash	B	2.4	D	H	
Window Well	B	2.3	D	H	
Window Track	X				
Exterior Sash	B	6.1	D	H	
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Handrail	X				
Newell Post	X				
Stair Tread	X				
Stair Riser	X				
Baluster	X				
Stringer	X				

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978
 Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
 S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



EXTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 15 of 22

Street Address: 50 Aylsworth Ave.

Unit: 1B City: Woonsocket

Primary Structure: House Body

Surface	Side	XRF	Condition	Lead	Remedy
Siding	All	COV	I	C	
Corner Board	All	COV	I	C	
Upper Trim	All	COV	I	C	
Lower Trim	All	COV	I	C	
Storm Door	C		N		
Door	X				
Door Casing	C1	COV	I	C	
Door Jamb	C1	COV	I	C	
Threshold	C1	12	D	N	
Kick Plate	C1	COV	I	C	
Storm Door	C2		N		
Door	C2	24	I	C	
Door Casing	C2	COV	I	C	
Door Jamb	C2	19.9	D	N	
Threshold	C2	00			
Door Kickplate	X				
Storm Door	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Kick Plate	X				
Overhang	C	00			
Column	X				
Newel Post	X				
Railing Cap	X				
Baluster	X				
Lower Rail	X				
Handrail	A	0.1			
Tread	A	00			
Riser	A	0.1			
Stringer					
Lattice	A/D	15.0	D	H	
Wall	A		N		
Steps	C		N		

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	All	COV	I	C	
Window Casing	↓	COV	I	C	
Window Sash	↓		N		
Window Sill	X				
Window Casing	X				
Window Sash 3F	D				
Window Sill	X				
Window Casing	X				
Window Sash	X				
Window Sill	X				
Window Casing	X				
Window Sash	X				
Window Shutter	X				
Fire Escape	D	0.1			
BA Window Sill	All	4.2	D	H	
BA Window Sash	↓	1.2	D	H	
BA Window Frame	↓	62	D	H	
BA Screen Frame	↓	0.1			
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
Foundation	All		N		
Bulkhead	X				
Drain Pipe	X				
Electrical Conduit	B/D	0.0			
Lamp Post	X				
Fence	All		N		

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978
Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV =
Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24

**DUST INSPECTION**

Street Address: 50 Aylsworth Ave. Unit: 1R City: Woonsocket

Sampling Date: 01/11/24 Analyzing Laboratory or ELPAT Accreditation: Schneider Laboratories Global, Inc

Sample #	Room #/Side	Dust Wipe Surface	*Sample Area (Dimensions)	Lab Result ($\mu\text{g}/\text{ft}^2$)	Lead
1D	Rm 1 / C	Floor	12 x 12	< 5.00	S
2D	Rm 1 / D	Sill	4 1/2 x 32	59.5	S
3D	Rm 2 / B	Floor	12 x 12	< 5.00	S
4D	Rm 2 / B	Sill	4 1/2 x 32	26.0	S
5D	Rm 3 / A	Floor	12 x 12	< 5.00	S
6D	Rm 3 / B	Sill	4 x 31 1/2	< 5.71	S
7D	Rm 6 / B	Floor	12 x 12	< 5.00	S
8D	Rm 6 / D	Sill	4 1/2 x 32	15.7	S
KEY: S = Lead-Safe H = Lead-Hazard *minimum 16 square inches; maximum 2 square feet					

Comments:

Initials JEE Date 01/11/24

Street Address: 50 Alysworth Ave. Unit: Commons City: Woonsocket

[illegible]

Initials JEE Date 01/11/24

**SOIL INSPECTION**Street Address: 50 Aylsworth Ave. Unit: 1R City: WoonsocketSampling Date: 01/11/24 Analyzing Laboratory or ELPAT Accreditation: Schneider Laboratories Global, Inc*If soil sampling was not performed, check all reasons that apply:*Covered by Ice/Snow ☐ Covered by Debris ☐ Other ☐ (specify) _____

Sample #	Structure/Area	Side	Distance (ft. or in)	Depth (ft. or in)	Bare (Y or N)	Result (ppm)	Lead
1S	Primary	A	< 3 ft.	1 in.	Y	55.3	S
2S	Primary	B	< 3 ft.	1 in.	Y	1120	H
3S	Primary	C	< 3 ft.	1 in.	Y	319	S
4S	Primary	D	< 3 ft.	1 in.	Y	559	H
	Play Area						
	Mid Yard						
5S	Garage	B	< 3 ft.	1 in.	Y	351	S
6S	Shed	A	< 3 ft.	1 in.	Y	445	H
	Fence						
	Play Equipment						
	Outdoor Furniture						
	Other						
KEY: S = Lead-Safe C = Conditionally Lead-Safe (covered) H = Lead-Hazard							

Indicate location(s) of soil sample collection on Form PBLC-23-3

Comments:

Initials JEE Date 01/11/24

**WATER INSPECTION**Street Address: 50 Aylsworth Ave. Unit: 1R City: WoonsocketSampling Date: 01/11/24 Analyzing Laboratory: Schneider Laboratories Global, Inc**Water Source:** Public Water Supplier: City of Woonsocket ☐ Private Well ☐ Unknown ☐(Check all that apply): Lead Service Line ☐ Lead Pipe / Gooseneck ☐ Non-Lead Service Line ☐ Unknown ☒

Sample #	Room #/Fixture	*First Draw (Y/N)	**Flushed Sample (Y/N)	Result (ppb)	Lead Hazard (Y/N)
2W	Kitchen Faucet	N	Y	< 5.00	N
*First Draw Sample: Has it been at least 6 hours since any water was last used? **Flushed Sample: Collected after one minute or until water turns cold					

RIDOH RECOMMENDED ACTIONS (Check all that apply):

- ☒ Use only cold water for drinking and cooking.
- ☒ Do not consume water without flushing until temperature drops.
- ☐ Do not consume water until lead level(s) <15 ppb is achieved.
- ☐ Owner must provide bottled water for cooking and drinking until RIDOH approves additional lead sampling results.
- ☐ Owner must label all taps "Lead Warning: Do not use for drinking or cooking".
- ☐ Filtration systems must be maintained and filters replaced per manufacturer's instructions.
- ☐ Other (specify) _____

Comments:Initials JEE Date 01/11/24



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475**Customer** ENVIRONMENTAL LEAD DETECTION (482)
Address 436 Gardners Neck Rd
Swansea, MA 02777-3105**Order #:** 546691**Matrix** Wipe
Received 01/16/24
Analyzed 01/16/24
Reported 01/18/24**Project** 50 Aylsworth Ave Apt 1 Rear
Location Woonsocket
Number

Sample ID	Cust. Sample ID	Location	Sample Date			
Parameter		Method	Area	Total	Conc.	RL*
546691-001	1D	Rm 1 Floor Side C	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546691-002	2D	Rm 1 Sill Side D	01/11/24			
Lead		EPA 7000B	1.00 ft2	59.5 µg/wipe	59.5 µg/ft2	5.00 µg/ft2
546691-003	3D	Rm 2 Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546691-004	4D	Rm 2 Sill Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	26.0 µg/wipe	26.0 µg/ft2	5.00 µg/ft2
546691-005	5D	Rm 3 Floor Side A	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546691-006	6D	Rm 3 Sill Side B	01/11/24			
Lead		EPA 7000B	0.875 ft2	<5.00 µg/wipe	<5.71 µg/ft2	5.71 µg/ft2
546691-007	7D	Rm 6 Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546691-008	8D	Rm 6 Sill Side D	01/11/24			
Lead		EPA 7000B	1.00 ft2	15.7 µg/wipe	15.7 µg/ft2	5.00 µg/ft2

Analyst SA
546691-01/18/24 11:00 AMReviewed By **Ahmed Elnasseh**
Analyst**EPA Lead Clearance as of 1/1/2024**

Location	Level	Unit
Floors	< 10.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 400	µg/ft2

HUD Lead Clearance as of 1/1/2024

Location	Level	Unit
Interior Floors	< 10.0	µg/ft2
Porch Floors	< 40.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 100	µg/ft2

Minimum Total Reporting Limit: 5.0 µg/wipe. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer ENVIRONMENTAL LEAD DETECTION (482)
Address 436 Gardners Neck Rd
Swansea, MA 02777-3105

Order #: 546693

Matrix Wipe
Received 01/16/24
Analyzed 01/16/24
Reported 01/17/24

Project 50 Aylsworth Ave Side Common
Location Woonsocket
Number

Sample ID	Cust. Sample ID	Location	Sample Date			
Parameter		Method	Area	Total	Conc.	RL*
546693-001	9D	Common Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	777 µg/wipe	777 µg/ft2	25.0 µg/ft2
546693-002	10D	Common Sill Side C	01/11/24			
Lead		EPA 7000B	0.750 ft2	65.1 µg/wipe	86.7 µg/ft2	6.67 µg/ft2
546693-003	11D	Blank	01/11/24			
Lead		EPA 7000B		<5.00 µg/wipe		5.00 µg/wipe

Analyst SA
546693-01/17/24 01:34 PM

Reviewed By **Ahmed Elnasseh**
Analyst

EPA Lead Clearance as of 1/1/2024

Location	Level	Unit
Floors	< 10.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 400	µg/ft2

HUD Lead Clearance as of 1/1/2024

Location	Level	Unit
Interior Floors	< 10.0	µg/ft2
Porch Floors	< 40.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 100	µg/ft2

Minimum Total Reporting Limit: 5.0 µg/wipe. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer: ENVIRONMENTAL LEAD DETECTION (482)
Address: 436 Gardners Neck Rd
Swansea, MA 02777-3105

Order #: 546684

Matrix Soil
Received 01/16/24
Analyzed 01/16/24
Reported 01/16/24

Attn:
Project: 50 Alysworth Ave
Location: Woonsocket
Number:

PO Number:

Sample ID	Cust. Sample ID	Location	Sample Date	Weight			
Parameter		Method		Total µg	% / Wt.	Conc.	RL*
546684-001	1S	Side A	01/11/24	1110 mg			
Lead		EPA 7000B		61.2 µg	0.00553 %	55.3 mg/kg	9.03 mg/kg
546684-002	2S	Side B	01/11/24	1110 mg			
Lead		EPA 7000B		1240 µg	0.112 %	1120 mg/kg	45.1 mg/kg
546684-003	3S	Side C	01/11/24	1100 mg			
Lead		EPA 7000B		352 µg	0.0319 %	319 mg/kg	9.08 mg/kg
546684-004	4S	Side D	01/11/24	1020 mg			
Lead		EPA 7000B		569 µg	0.0559 %	559 mg/kg	19.6 mg/kg
546684-005	5S	Garage Side B	01/11/24	1110 mg			
Lead		EPA 7000B		391 µg	0.0351 %	351 mg/kg	8.98 mg/kg
546684-006	6S	Shed Side A	01/11/24	1110 mg			
Lead		EPA 7000B		495 µg	0.0445 %	445 mg/kg	18.0 mg/kg

Analyst: SA
546684-01/16/24 04:33 PM

Kelly Muncy

Reviewed By: **Kelly Muncy**
Manager

EPA Lead in Residential Soil as of 1/1/24

Location	Level	Unit
Play Areas	400	mg/kg
Bare Soil Average	1200	mg/kg

Minimum reporting limit: 10.0 µg. EPA does not distinguish between lead-contaminated soil and soil-lead hazards. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Values are reported to three significant figures. PPM = mg/kg | PPB = µg/kg. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer: ENVIRONMENTAL LEAD DETECTION (482)
Address: 436 Gardners Neck Rd
Swansea, MA 02777-3105

Order #: 546692

Matrix Drinking Water
Received 01/16/24
Reported 01/18/24

Attn:
Project: 50 Aylsworth
Location: Woonsocket
Number:

PO Number:

Sample ID	Cust. Sample ID	Location	Result	RL*	Units	Analysis Date	Analyst
Parameter		Method					
546692-001	1W	Kitchen Faucet Ap 1 Front					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA
546692-002	2W	Kitchen Faucet Ap 1 Rear					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA
546692-004	4W	Kitchen Faucet Ap 2 Rear					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA

546692-01/18/24 12:59 PM

Kelly Muncy

Reviewed By: **Kelly Muncy**
Manager

EPA Regulatory Limits

Parameter	Reg. Limit	Unit
Lead	15.0	µg/L

State Certifications

Method	Parameter	Rhode Island	Virginia
EPA 200.9 Rev 2.2	Lead	ELAP Certified	VELAP Certified
State	Certificate Number		
Rhode Island	ELAP LAO00084		
Virginia	VELAP 12664		

All internal QC parameters were met. Unusual sample conditions, if any, are described. Surrogate Spike results designated with "D" indicate that the analyte was diluted out. "MI" indicates matrix interference. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. Solid PPM = mg/kg | PPB = µg/kg and Water PPM = mg/L | PPB = µg/L. The test results apply to the sample as received.

**LEAD INSPECTION REPORT**Notice to Correct Lead Hazards Y ☒ N ☐ Notice of Violation Y ☐ N ☒**Property Information**

50 Aylsworth Ave.		2F	Woonsocket 02895		
Street Address		Unit	City & Zip Code		
4	4	1910	41-G	121-4	0
# Units	# Rooms	Year Built	Plat	Lot	# Children < 6 Years

Regulated Facility: Y ☒ N ☐ Owner- Occupied Dwelling Unit: Y ☐ N ☒ Owner-Occupied Premises: Y ☐ N ☒**Property Owner Information**

Matthew Vaznaian	
Name(s)	
26 Aylsworth Ave. Apt 1	Woonsocket, RI 02895
Street Address	City, State, Zip Code
Phone	Other Contact

Inspection InformationDate of Initial Inspection: 01/11/24 ☒ Comprehensive ☐ Partial ☐ Clearance ☐ RenewalDate of Follow-up Inspection _____ ☐ Comprehensive ☐ Partial ☐ Clearance ☐ RenewalMedia Tested (check all that apply): ☒ Paint ☒ Dust ☒ Soil ☒ Water

Reason for Inspection (check all that apply):

<input type="checkbox"/> Department of Health Initiated	<input type="checkbox"/> School or Child Care Center
<input type="checkbox"/> HUD	<input type="checkbox"/> Real Estate Transaction
<input checked="" type="checkbox"/> Other Agency <u>City of Woonsocket</u>	<input type="checkbox"/> Private Client – Other _____

Inspection Company Information

Environmental Lead Detection, Inc.	436 Gardners Neck Rd.	
Company Name	Street Address	
Swansea, MA 02777	(508) 674-8730	
City, State, Zip Code	Phone	Other Contact

Lead Inspector Information

John Eastman	
Print Name	Signature
RIDOH License # <u>LI0004</u>	Expiration <u>1/31/2026</u>
	RIDOH License # _____
Print Name of Apprentice (if applicable)	

This inspection was conducted by the above licensed lead professional(s) in accordance with the Rhode Island Department of Health rules and regulations for Lead Poisoning Prevention (216-RICR-50-15-5), as amended.

All property owners must disclose lead inspection results to current/future tenants and prospective buyers.



REQUIRED ACTIONS FOLLOWING INSPECTION

This report documents the findings of the lead inspection for each room or area inspected and all media tested (i.e. paint, dust, soil, water). Each inspection page contains a “Lead” column which indicates whether the surface or media was Lead-Safe (S), Conditionally Lead-Safe (C), or Lead-Hazard (H), as defined below, at the time of the inspection.

Rhode Island Department of Health (RIDOH) Definitions

Lead-Safe means the lead concentration in the paint/media is within the RIDOH Lead-Safe concentration range and no treatments are required. All painted surfaces constructed after 1/1/1978 may be assumed to be Lead-Safe and testing is not required.

Conditionally Lead-Safe means the surface/media requires routine maintenance (i.e. keeping lead painted surfaces intact and soil covered with grass, mulch, etc.) and renewal inspections every two years to recertify the Lead-Safe conditions. The renewal inspections must include a visual inspection of all Conditionally Lead-Safe areas and interior dust wipe sampling by a RIDOH-licensed Lead Inspector.

Assumed Positive means all painted surfaces constructed before 1/1/1978 must be “assumed positive” (AP) for lead, unless determined otherwise by a RIDOH-licensed Lead Inspector.

Lead-Hazard means damaged paint, interior dust, bare soil, or drinking water above the RIDOH Lead-Safe thresholds. The surface/media require treatment in accordance with RIDOH Regulation 216-RICR-50-15-5 – Lead Poisoning Prevention to obtain Lead-Safe, or Conditional Lead-Safe Status.

Regulated Facility means all residential rental units, all properties where a child younger than six years old lives or is expected to live in the next 12 months for 14 or more days per year, and all child care centers including preschools and kindergarten classrooms.

Required Actions if Lead Hazards are Identified at a Regulated Facility

- 1. NOTICE TO CORRECT LEAD HAZARDS:** A Notice to Correct Lead Hazards requires property owners to correct the environmental lead hazards identified in this report within **90 days** of receipt of the notice. (Exterior paint and soil hazards identified between November 1st and March 31st must be corrected by the following June 30th.) Except for “Spot Removal Exemption” areas, a licensed Lead Renovation Firm or Lead Contractor must perform the work.
- 2. NOTICE OF VIOLATION:** A Notice of Violation requires property owners to correct all environmental lead hazards within **30 days** of receipt of the notice. (Exterior paint and soil hazards identified between November 1st and March 31st must be corrected by the following June 30th.) A licensed Lead Contractor must perform the work unless RIDOH approves a variance request in writing.
- 3. EXTENSION:** Property owners may request an extension to the above compliance period(s) by submitting in writing detailed information on the reason(s) for the delay, the person who will correct the hazards, and by what date. Mail requests to the Lead Program Manager, RI Department of Health, Room 206, 3 Capitol Hill, Providence, RI 02908, fax to (401) 222-2456 or 222-7759, or e-mail to doh.leadprogram@health.ri.gov within 20 days of receiving this report.
- 4. SPOT REMOVAL EXEMPTION:** A licensed Lead Renovation Firm or Lead Contractor is not required when the scope of work does not exceed **6 ft² of interior lead-based paint** or **20 ft² of exterior lead-based paint**, provided that the work does not include window replacement or interior demolition and no work practices prohibited by 216-RICR-50-15-12 are used. **A licensed Lead Renovation Firm or Lead Contractor is always required for window replacement or interior demolition.**
- 5. CLEARANCE INSPECTION:** A Clearance Inspection by a Lead Inspector is required when lead hazard reduction or lead hazard control work is completed. This Clearance Inspection must include a visual inspection of all Lead-Hazard areas/media identified in this report and for interior work, **dust wipe sampling** in accordance with 216-RICR-50-15-5. As a minimum, the EPA Cleaning Verification Procedure by a certified Lead Renovator is required for interior renovation, repair, and painting (RRP) work.

- For questions regarding this property and inspection report, lead hazard reduction or lead hazard control options, and regulatory requirements, contact the Lead Inspector listed on page 1 of this report.
- For additional information about lead, including properties with lead violations, and to find a licensed lead professional, call the Center for Healthy Homes and Environment at (401) 222-7796 or visit www.health.ri.gov/healthrisks/poisoning/lead
- For additional requirements regarding rental properties and Certificates of Conformance, call (401) 222-7796 or visit the RIDOH lead certificate page at <https://health.ri.gov/find/environmentallead/propertystatus/>.




FLOOR PLAN PROPERTY SKETCH (BLOCK)

Street Address: 50 Aylsworth Ave. Unit: 2F City: Woonsocket

Floor 2

Floor _____


Side C

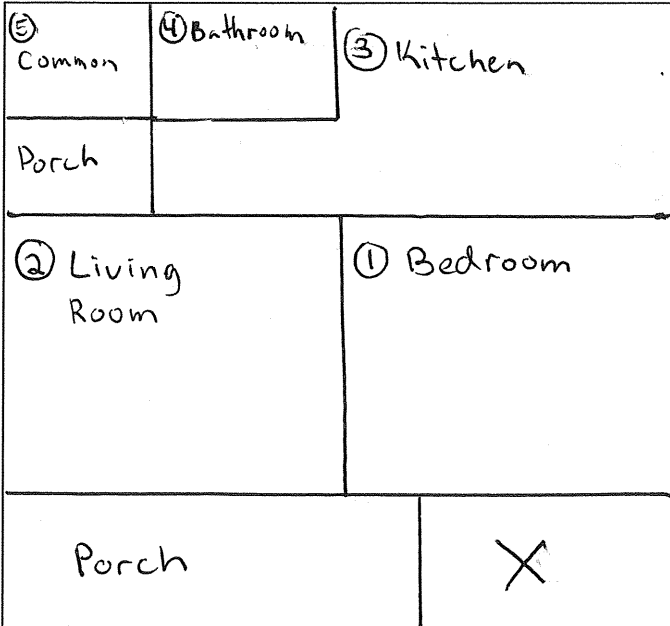

Side A (Address Street)

Floor _____


Side C

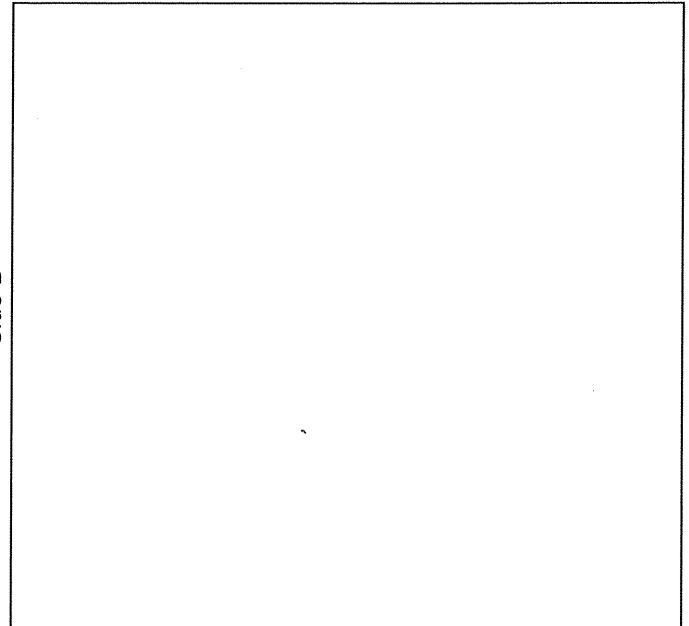

Side A (Address Street)


Floor _____

Side C

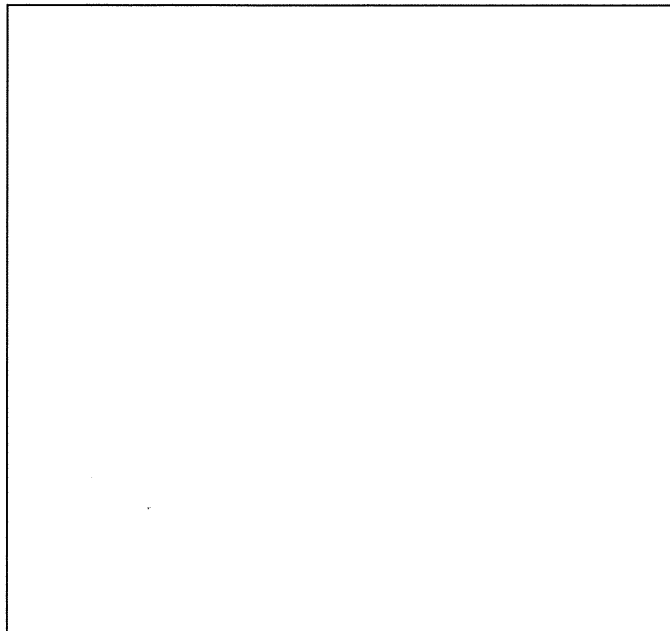

Side A (Address Street)

Side C

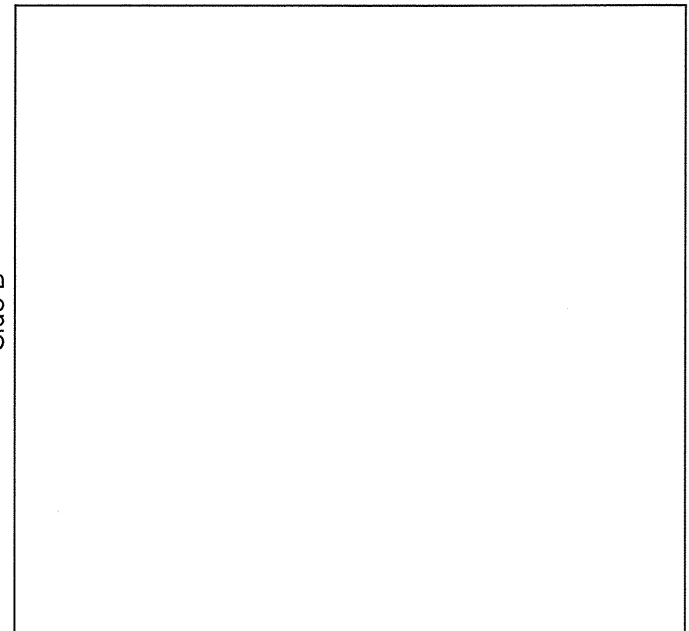


Side A (Address Street)

Initials JEE Date 01/11/24



FLOOR PLAN/PROPERTY SKETCH (GRID)

Street Address: 50 Aylsworth Ave. Unit: 2F City: Woonsocket

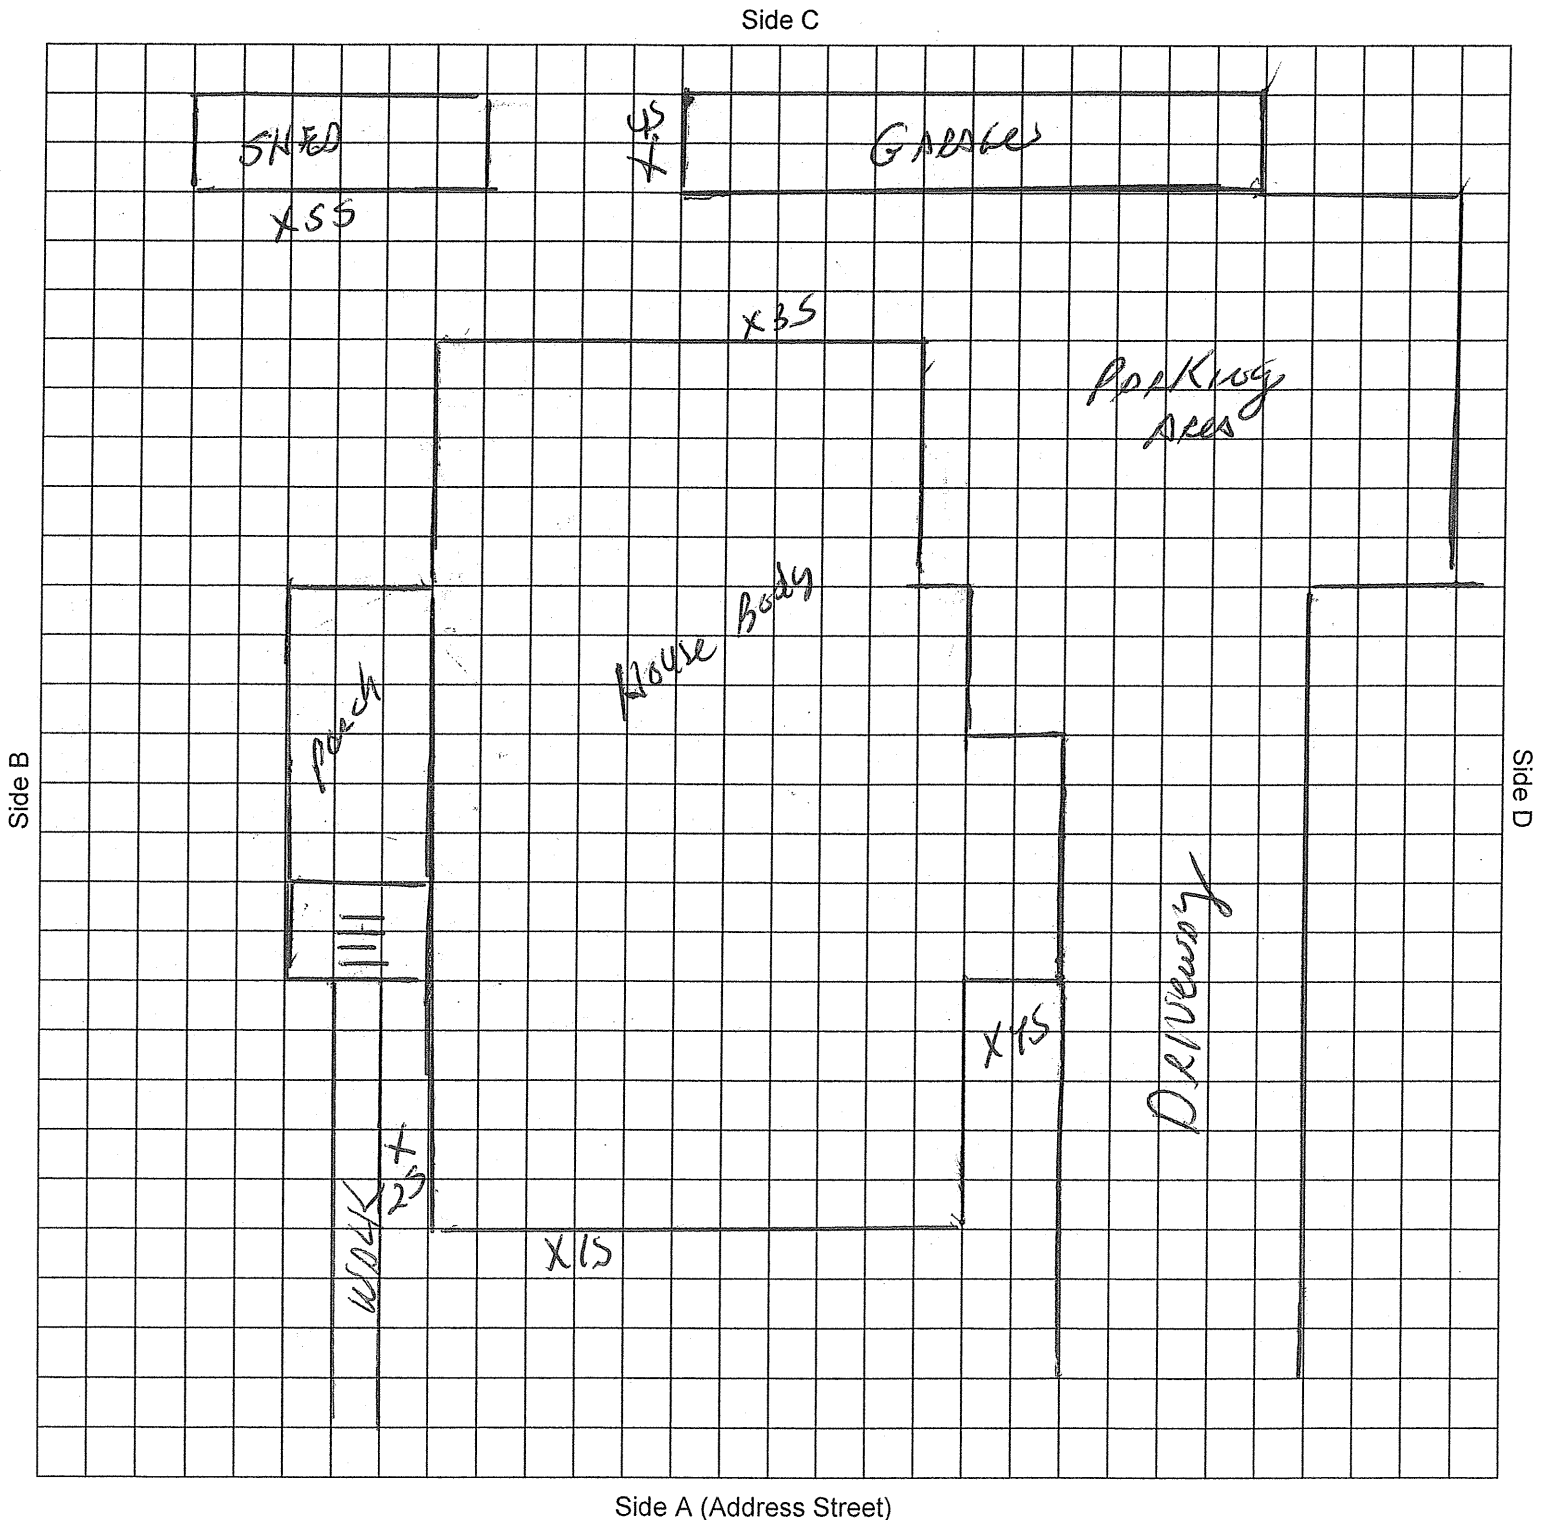

Initials JEE Date 01/11/24

Street Address: 50 Aylsworth Ave. Unit: 2F City: Woonsocket**REPORT KEY****XRF:**

Positive means greater than or equal to 1.0 mg/cm² or **AP** = Assumed Positive for pre-1978 paint
Negative means less than 1.0 mg/cm² or **78** = post-1978 paint
Inconclusive is in accordance with the XRF manufacturer's Performance Characteristic Sheet (PCS)

Test Kit:

Positive reaction (pink or red) is "+" **Inconclusive** (no reaction) is "-"

Paint Chip Sample:

Lead-Safe means 90 ppm to less than 5,000 ppm or post-1978
Conditionally Lead-Safe means **INTACT** lead-based paint greater than or equal to 5,000 ppm (percent by weight) or 1.0 mg/cm² (by measured area)
Lead-Hazard means **DAMAGED** lead-based paint greater than or equal to 5,000 ppm or 1.0 mg/cm²

Paint Condition:

N=No Paint **I**=Intact **D**=Damaged **AD**=Assumed Damaged **B**=Binding or Friction

Lead:

S= Lead-Safe **C**=Conditionally Lead-Safe **H**=Lead-Hazard

Remedy:

COV=Covered **MI**=Made Intact **REM**=Removed **REP**=Replaced

XRF CALIBRATION DATAManufacturer, Model & Serial # SciAps X-550 SN 00639Standard Type (check one): Manufacturer ☒ NIST ☐ Other (specify) _____

Standard (mg/cm ²)	Time of Test	Reading 1	Reading 2	Reading 3	Average (mg/cm ²)	Tolerance
1.0	9:02	1.1	1.0	1.1	1.1	0.1
1.0	12:56	1.1	1.0	1.0	1.0	0.0

Comments:Initials JEEDate 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 9 of 21

Street Address: 50 Aylsworth Ave. Unit: 2F City: Woonsocket

Room #: 3 Description (check one): ☒ Kitchen ☐ Pantry ☐ Bathroom

Surface	Side	XRF	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall <u>Upper</u>	A	0.4			
Wall <u>↓</u>	B	0.2			
Wall <u>↓</u>	C	0.1			
Wall <u>↓</u>	D	0.5			
Chair Rail	A11	0.1			
Baseboard	A11	0.2			
Radiator	X				
Floor		COV	I	C	
Door	A1	0.1			
Door Casing	A1/A2	0.1			
Door Jamb	A1/A2	0.0			
Threshold	X				
Door	B	0.0			
Door Casing	↓	0.1			
Door Jamb	↓	3.2	D	H	
Threshold	↓	0.3			
Door	C	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	↓	0.1			
Door	D	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	X				
Closet Door	D	0.0			
Closet Casing	↓	0.1			
Closet Jamb	↓	0.0			
Closet Ceiling	↓	0.0			
Closet Wall	↓	0.2			
Closet Shelf	↓	0.1			
Shelf Support	↓	0.4			
Closet Pole	X				
Cl Baseboard	D	0.4			
Closet Floor	D	COV	I	C	

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	A11	0.0			
Window Apron	X				
Window Casing	A11	0.0			
Window Jamb	↓	0.1			
Interior Stop	↓	0.0			
Interior Sash	↓		N		
Window Well	↓				
Window Track	↓				
Exterior Sash	↓				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Upper Cab Door	C	0.0			
Upper Cab Frame	↓	0.1			
Upper Cab Wall	↓	0.0			
Upper Cab Shelf	↓	0.0			
Shelf Support	X				
Lower Cab Door	C	0.0			
Lower Cab Frame	↓	0.0			
Lower Cab Wall	↓	0.0			
Lower Cab Shelf	↓	0.0			
Shelf Support	X				
Cabinet Drawer	C	0.0			
<u>Lower Wall</u>	A11	0.0			

XRF: Positive $\geq 1.0 \text{ mg/cm}^2$, Test Kit "+", or "AP" = Assumed Positive; Negative $< 1.0 \text{ mg/cm}^2$ or "78" = Post-1978
Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 10 of 21

Street Address: 50 Aylsworth Ave.

Unit: 2F City: Woonsocket

Room #: 4 Description (check one): ☐ Kitchen ☐ Pantry ☒ Bathroom

Surface	Side	XRF	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	A11	0.1			
Wall <u>Upper</u>	A	0.1			
Wall <u>↓</u>	B	0.0			
Wall <u>↓</u>	C	0.2			
Wall <u>↓</u>	D	0.0			
Chair Rail	A11	0.1			
Baseboard	A11	0.1			
Radiator	X				
Floor		0.0			
Door	A	0.7			
Door Casing	<u>↓</u>	0.0			
Door Jamb	<u>↓</u>	0.0			
Threshold	<u>↓</u>	0.0			
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
Cl Baseboard	X				
Closet Floor	X				

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Upper Cab Door	X				
Upper Cab Frame	D	0.0			
Upper Cab Wall	<u>↓</u>	0.1			
Upper Cab Shelf	<u>↓</u>	0.0			
Shelf Support	<u>↓</u>	0.0			
Lower Cab Door	X				
Lower Cab Frame	X				
Lower Cab Wall	X				
Lower Cab Shelf	X				
Shelf Support	X				
Cabinet Drawer	X				
<u>Lower Walls</u>	A11	0.0			
<u>Cab. ceiling</u>	D	0.1			
<u>Vent</u>	B	0.0			

XRF: Positive $\geq 1.0 \text{ mg/cm}^2$, Test Kit "+", or "AP" = Assumed Positive; Negative $< 1.0 \text{ mg/cm}^2$ or "78" = Post-1978
Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 11 of 21

Street Address: 50 Aylsworth Ave.

Unit: 2F City: Woonsocket

Room #: 5 Description (check one): ☒ Hallway ☒ Staircase (separate page required for each one)

Side Common

Surface	Side	Pb	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall <u>Upper</u>	A	0.0			
Wall <u>↓</u>	B	0.1			
Wall <u>↓</u>	C	0.0			
Wall <u>↓</u>	D	0.0			
Chair Rail	All	0.0			
Baseboard	X				
Radiator	X				
Floor		COV	I	C	
Door <u>1st Floor</u>	A	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	1.7	D	H	
Threshold	↓	1.4	D	H	
Door <u>1st Floor</u>	CID	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	D	0.0			
Door <u>2nd Floor</u>	A	0.0			
Door Casing	↓	0.1			
Door Jamb	↓	1.7	D	H	
Threshold	↓	1.8	D	H	
Door <u>2nd Floor</u>	CID	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	D	0.1			
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Wall Casing	All	0.0			

Surface	Side	Pb	Condition	Lead	Remedy
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				
Window Sill	C	0.0			
Window Apron	↓	0.0			
Window Casing	↓	0.0			
Window Jamb	↓	0.0			
Interior Stop	↓	0.1	Fixed		
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Handrail		0.0			
Newell Post	X				
Stair Tread		COV	I	C	
Stair Riser		0.0			
Baluster	X				
Stringer	X				

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978
 Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
 S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 12 of 21

Street Address: 50 Aylsworth Ave.

Unit: 2F City: Woonsocket

Room #: _____ Description (check one): ☐ Hallway ☒ Staircase (separate page required for each one)

Basement Entry

Surface	Side	Pb	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall <u>Upper</u>	A	0.0			
Wall <u>↓</u>	B	0.1			
Wall <u>↓</u>	C	0.0			
Wall <u>↓</u>	D	0.0			
Chair Rail	All	0.0			
Baseboard	X				
Radiator	X				
Floor		COV	I	C	
Door	A	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.1			
Threshold	X				
Door	C	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	2.7	D	H	
Threshold	↓	0.0			
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	C		N		
Closet Casing	↓		N		
Closet Jamb	↓		N		
Closet Ceiling	↓		N		
Closet Wall	↓		N		
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				

Surface	Side	Pb	Condition	Lead	Remedy
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				
Window Sill	B		N		
Window Apron	X				
Window Casing	B	1.1	I	C	
Window Jamb	B	1.6	D	H	
Interior Stop	X				
Interior Sash	B	2.4	D	H	
Window Well	B	2.3	D	H	
Window Track	X				
Exterior Sash	B	6.1	D	H	
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Handrail	X				
Newell Post	X				
Stair Tread	X				
Stair Riser	X				
Baluster	X				
Stringer	X				

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978
Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



EXTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 13 of 21

Street Address: 50 Aylsworth Ave.

Unit: 2F City: Woonsocket

Primary Structure: House Body

Surface	Side	XRF	Condition	Lead	Remedy
Siding	All	COV	I	C	
Corner Board	All	COV	I	C	
Upper Trim	All	COV	I	C	
Lower Trim	All	COV	I	C	
Storm Door	C		N		
Door	X				
Door Casing	C-1	COV	I	C	
Door Jamb	C-1	COV	I	C	
Threshold	C-1	12	D	N	
Kick Plate	C-1	COV	I	C	
Storm Door	C2		N		
Door	C2	34	I	C	
Door Casing	C2	COV	I	C	
Door Jamb	C2	19.9	D	N	
Threshold	C2	00			
Door Kickplate	X				
Storm Door	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Kick Plate	X				
Overhang	C	00			
Column	X				
Newel Post	X				
Railing Cap	X				
Baluster	X				
Lower Rail	X				
Handrail	A	0.1			
Tread	A	00			
Riser	A	0.1			
Stringer					
Lattice	A/D	15.0	D	H	
Wall	A		N		
Steps	C		N		

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	All	COV	I	C	
Window Casing	I	COV	I	C	
Window Sash	↓		N		
Window Sill	X				
Window Casing	X				
Window Sash 3F	D				
Window Sill	X				
Window Casing	X				
Window Sash	X				
Window Sill	X				
Window Casing	X				
Window Sash	X				
Window Shutter	X				
Fire Escape	D	0.1			
BA Window Sill	All	4.2	D	H	
BA Window Sash	I	1.2	D	H	
BA Window Frame	↓	62	D	H	
BA Screen Frame	↓	0.1			
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
Foundation	All		N		
Bulkhead	X				
Drain Pipe	X				
Electrical Conduit	B/D	0.0			
Lamp Post	X				
Fence	All		N		

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978

Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction

S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV =

Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24

**DUST INSPECTION**
 Street Address: 50 Alysworth Ave. Unit: 2F City: Woonsocket

 Sampling Date: 01/11/24 Analyzing Laboratory or ELPAT Accreditation: Schneider Laboratories Global, Inc

Sample #	Room #/Side	Dust Wipe Surface	*Sample Area (Dimensions)	Lab Result ($\mu\text{g}/\text{ft}^2$)	Lead
1D	Rm 1 / C	Floor	12 x 12	183	H
2D	Rm 1 / D	Sill	4 1/2 x 32	26.9	S
3D	Rm 2 / A	Floor	12 x 12	36.2	H
4D	Rm 2 / B	Sill	4 1/2 x 32	55.7	S
5D	Rm 3 / C	Floor	12 x 12	3110	H
6D	Rm 3 / C	Sill	4 1/2 x 32	45.5	S
7D	Rm 4 / A	Floor	12 x 12	166	H
KEY: S = Lead-Safe H = Lead-Hazard *minimum 16 square inches; maximum 2 square feet					

Comments:

 Initials JEE Date 01/11/24

Street Address: 50 Aylsworth Ave. Unit: Commons City: Woonsocket

[illegible]

Initials JEE Date 01/11/24

**SOIL INSPECTION**Street Address: 50 Aylsworth Ave. Unit: 2F City: WoonsocketSampling Date: 01/11/24 Analyzing Laboratory or ELPAT Accreditation: Schneider Laboratories Global, Inc*If soil sampling was not performed, check all reasons that apply:*Covered by Ice/Snow ☐ Covered by Debris ☐ Other ☐ (specify) _____

Sample #	Structure/Area	Side	Distance (ft. or in)	Depth (ft. or in)	Bare (Y or N)	Result (ppm)	Lead
1S	Primary	A	< 3 ft.	1 in.	Y	55.3	S
2S	Primary	B	< 3 ft.	1 in.	Y	1120	H
3S	Primary	C	< 3 ft.	1 in.	Y	319	S
4S	Primary	D	< 3 ft.	1 in.	Y	559	H
	Play Area						
	Mid Yard						
5S	Garage	B	< 3 ft.	1 in.	Y	351	S
6S	Shed	A	< 3 ft.	1 in.	Y	445	H
	Fence						
	Play Equipment						
	Outdoor Furniture						
	Other						
KEY: S = Lead-Safe C = Conditionally Lead-Safe (covered) H = Lead-Hazard							

Indicate location(s) of soil sample collection on Form PBLC-23-3

Comments:

Initials JEE Date 01/11/24

**WATER INSPECTION**Street Address: 50 Aylsworth Ave. Unit: 2F City: WoonsocketSampling Date: 01/11/24 Analyzing Laboratory: Schneider Laboratories Global, Inc**Water Source:** Public Water Supplier: City of Woonsocket ☐ Private Well ☐ Unknown ☐(Check all that apply): Lead Service Line ☐ Lead Pipe / Gooseneck ☐ Non-Lead Service Line ☐ Unknown ☒

Sample #	Room #/Fixture	*First Draw (Y/N)	**Flushed Sample (Y/N)	Result (ppb)	Lead Hazard (Y/N)

*First Draw Sample: Has it been at least 6 hours since any water was last used?
**Flushed Sample: Collected after one minute or until water turns cold

RIDOH RECOMMENDED ACTIONS (Check all that apply):

- ☒ Use only cold water for drinking and cooking.
- ☒ Do not consume water without flushing until temperature drops.
- ☐ Do not consume water until lead level(s) <15 ppb is achieved.
- ☐ Owner must provide bottled water for cooking and drinking until RIDOH approves additional lead sampling results.
- ☐ Owner must label all taps "Lead Warning: Do not use for drinking or cooking".
- ☐ Filtration systems must be maintained and filters replaced per manufacturer's instructions.
- ☐ Other (specify) _____

Comments:

Water sample will be collected at clearance inspection.

Initials JEE Date 01/11/24



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475**Customer** ENVIRONMENTAL LEAD DETECTION (482)
Address 436 Gardners Neck Rd
Swansea, MA 02777-3105**Order #:** 546670**Project** 50 Aylsworth Ave Apt 2 Front
Location Woonsocket
Number**Matrix** Wipe
Received 01/16/24
Analyzed 01/16/24
Reported 01/18/24

Sample ID	Cust. Sample ID	Location	Sample Date			
Parameter		Method	Area	Total	Conc.	RL*
546670-001	1D	Rm 1 Floor Side C	01/11/24			
Lead		EPA 7000B	1.00 ft2	183 µg/wipe	183 µg/ft2	5.00 µg/ft2
546670-002	2D	Rm 1 Sill Side D	01/11/24			
Lead		EPA 7000B	1.00 ft2	26.9 µg/wipe	26.9 µg/ft2	5.00 µg/ft2
546670-003	3D	Rm 2 Floor Side A	01/11/24			
Lead		EPA 7000B	1.00 ft2	36.2 µg/wipe	36.2 µg/ft2	5.00 µg/ft2
546670-004	4D	Rm 2 Sill Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	55.7 µg/wipe	55.7 µg/ft2	5.00 µg/ft2
546670-005	5D	Rm 3 Floor Side C	01/11/24			
Lead		EPA 7000B	1.00 ft2	3110 µg/wipe	3110 µg/ft2	100 µg/ft2
546670-006	6D	Rm 3 Sill Side C	01/11/24			
Lead		EPA 7000B	1.00 ft2	45.5 µg/wipe	45.5 µg/ft2	5.00 µg/ft2
546670-007	7D	Rm 4 Floor Side A	01/11/24			
Lead		EPA 7000B	1.00 ft2	166 µg/wipe	166 µg/ft2	5.00 µg/ft2

Analyst SA
546670-01/18/24 10:56 AMReviewed By **Ahmed Elnasseh**
Analyst**EPA Lead Clearance as of 1/1/2024**

Location	Level	Unit
Floors	< 10.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 400	µg/ft2

HUD Lead Clearance as of 1/1/2024

Location	Level	Unit
Interior Floors	< 10.0	µg/ft2
Porch Floors	< 40.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 100	µg/ft2

Minimum Total Reporting Limit: 5.0 µg/wipe. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer ENVIRONMENTAL LEAD DETECTION (482)
Address 436 Gardners Neck Rd
Swansea, MA 02777-3105

Order #: 546693

Matrix Wipe
Received 01/16/24
Analyzed 01/16/24
Reported 01/17/24

Project 50 Aylsworth Ave Side Common
Location Woonsocket
Number

Sample ID	Cust. Sample ID	Location	Sample Date			
Parameter		Method	Area	Total	Conc.	RL*
546693-001	9D	Common Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	777 µg/wipe	777 µg/ft2	25.0 µg/ft2
546693-002	10D	Common Sill Side C	01/11/24			
Lead		EPA 7000B	0.750 ft2	65.1 µg/wipe	86.7 µg/ft2	6.67 µg/ft2
546693-003	11D	Blank	01/11/24			
Lead		EPA 7000B		<5.00 µg/wipe		5.00 µg/wipe

Analyst SA
546693-01/17/24 01:34 PM

Reviewed By **Ahmed Elnasseh**
Analyst

EPA Lead Clearance as of 1/1/2024

Location	Level	Unit
Floors	< 10.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 400	µg/ft2

HUD Lead Clearance as of 1/1/2024

Location	Level	Unit
Interior Floors	< 10.0	µg/ft2
Porch Floors	< 40.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 100	µg/ft2

Minimum Total Reporting Limit: 5.0 µg/wipe. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer: ENVIRONMENTAL LEAD DETECTION (482)
Address: 436 Gardners Neck Rd
Swansea, MA 02777-3105

Order #: 546684

Matrix Soil
Received 01/16/24
Analyzed 01/16/24
Reported 01/16/24

Attn:
Project: 50 Alysworth Ave
Location: Woonsocket
Number:

PO Number:

Sample ID	Cust. Sample ID	Location	Sample Date	Weight			
Parameter		Method		Total µg	% / Wt.	Conc.	RL*
546684-001	1S	Side A	01/11/24	1110 mg			
Lead		EPA 7000B		61.2 µg	0.00553 %	55.3 mg/kg	9.03 mg/kg
546684-002	2S	Side B	01/11/24	1110 mg			
Lead		EPA 7000B		1240 µg	0.112 %	1120 mg/kg	45.1 mg/kg
546684-003	3S	Side C	01/11/24	1100 mg			
Lead		EPA 7000B		352 µg	0.0319 %	319 mg/kg	9.08 mg/kg
546684-004	4S	Side D	01/11/24	1020 mg			
Lead		EPA 7000B		569 µg	0.0559 %	559 mg/kg	19.6 mg/kg
546684-005	5S	Garage Side B	01/11/24	1110 mg			
Lead		EPA 7000B		391 µg	0.0351 %	351 mg/kg	8.98 mg/kg
546684-006	6S	Shed Side A	01/11/24	1110 mg			
Lead		EPA 7000B		495 µg	0.0445 %	445 mg/kg	18.0 mg/kg

Analyst: SA
546684-01/16/24 04:33 PM

Kelly Muncy

Reviewed By: **Kelly Muncy**
Manager

EPA Lead in Residential Soil as of 1/1/24

Location	Level	Unit
Play Areas	400	mg/kg
Bare Soil Average	1200	mg/kg

Minimum reporting limit: 10.0 µg. EPA does not distinguish between lead-contaminated soil and soil-lead hazards. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Values are reported to three significant figures. PPM = mg/kg | PPB = µg/kg. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer: ENVIRONMENTAL LEAD DETECTION (482)
Address: 436 Gardners Neck Rd
Swansea, MA 02777-3105

Order #: 546692

Matrix Drinking Water
Received 01/16/24
Reported 01/18/24

Attn:

Project: 50 Aylsworth
Location: Woonsocket
Number:

PO Number:

Sample ID	Cust. Sample ID	Location	Result	RL*	Units	Analysis Date	Analyst
Parameter		Method					
546692-001	1W	Kitchen Faucet Ap 1 Front					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA
546692-002	2W	Kitchen Faucet Ap 1 Rear					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA
546692-004	4W	Kitchen Faucet Ap 2 Rear					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA

546692-01/18/24 12:59 PM

Kelly Muncy

Reviewed By: Kelly Muncy
Manager

EPA Regulatory Limits

Parameter	Reg. Limit	Unit
Lead	15.0	µg/L

State Certifications

Method	Parameter	Rhode Island	Virginia
EPA 200.9 Rev 2.2	Lead	ELAP Certified	VELAP Certified
State	Certificate Number		
Rhode Island	ELAP LAO00084		
Virginia	VELAP 12664		

All internal QC parameters were met. Unusual sample conditions, if any, are described. Surrogate Spike results designated with "D" indicate that the analyte was diluted out. "MI" indicates matrix interference. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. Solid PPM = mg/kg | PPB = µg/kg and Water PPM = mg/L | PPB = µg/L. The test results apply to the sample as received.

**LEAD INSPECTION REPORT**Notice to Correct Lead Hazards Y ☒ N ☐ Notice of Violation Y ☐ N ☒**Property Information**

50 Aylsworth Ave.		2R		Woonsocket 02895	
Street Address		Unit		City & Zip Code	
4	4	1910	41-G	121-4	0
# Units	# Rooms	Year Built	Plat	Lot	# Children < 6 Years

Regulated Facility: Y ☒ N ☐ Owner- Occupied Dwelling Unit: Y ☐ N ☒ Owner-Occupied Premises: Y ☐ N ☒**Property Owner Information**

Matthew Vaznaian	
Name(s)	
26 Aylsworth Ave. Apt 1	Woonsocket, RI 02895
Street Address	City, State, Zip Code
Phone	Other Contact

Inspection InformationDate of Initial Inspection: 01/11/24 ☒ Comprehensive ☐ Partial ☐ Clearance ☐ RenewalDate of Follow-up Inspection _____ ☐ Comprehensive ☐ Partial ☐ Clearance ☐ RenewalMedia Tested (check all that apply): ☒ Paint ☒ Dust ☒ Soil ☒ Water

Reason for Inspection (check all that apply):

<input type="checkbox"/> Department of Health Initiated	<input type="checkbox"/> School or Child Care Center
<input type="checkbox"/> HUD	<input type="checkbox"/> Real Estate Transaction
<input checked="" type="checkbox"/> Other Agency <u>City of Woonsocket</u>	<input type="checkbox"/> Private Client – Other _____

Inspection Company Information

Environmental Lead Detection, Inc.	436 Gardners Neck Rd.
Company Name	Street Address
Swansea, MA 02777	(508) 674-8730
City, State, Zip Code	Phone
	Other Contact

Lead Inspector Information

John Eastman	
Print Name	Signature
RIDOH License # <u>LI0004</u>	Expiration <u>1/31/2026</u>
	RIDOH License # _____
Print Name of Apprentice (if applicable)	

This inspection was conducted by the above licensed lead professional(s) in accordance with the Rhode Island Department of Health rules and regulations for Lead Poisoning Prevention (216-RICR-50-15-5), as amended.

All property owners must disclose lead inspection results to current/future tenants and prospective buyers.



REQUIRED ACTIONS FOLLOWING INSPECTION

This report documents the findings of the lead inspection for each room or area inspected and all media tested (i.e. paint, dust, soil, water). Each inspection page contains a "Lead" column which indicates whether the surface or media was Lead-Safe (S), Conditionally Lead-Safe (C), or Lead-Hazard (H), as defined below, at the time of the inspection.

Rhode Island Department of Health (RIDOH) Definitions

Lead-Safe means the lead concentration in the paint/media is within the RIDOH Lead-Safe concentration range and no treatments are required. All painted surfaces constructed after 1/1/1978 may be assumed to be Lead-Safe and testing is not required.

Conditionally Lead-Safe means the surface/media requires routine maintenance (i.e. keeping lead painted surfaces intact and soil covered with grass, mulch, etc.) and renewal inspections every two years to recertify the Lead-Safe conditions. The renewal inspections must include a visual inspection of all Conditionally Lead-Safe areas and interior dust wipe sampling by a RIDOH-licensed Lead Inspector.

Assumed Positive means all painted surfaces constructed before 1/1/1978 must be "assumed positive" (AP) for lead, unless determined otherwise by a RIDOH-licensed Lead Inspector.

Lead-Hazard means damaged paint, interior dust, bare soil, or drinking water above the RIDOH Lead-Safe thresholds. The surface/media require treatment in accordance with RIDOH Regulation 216-RICR-50-15-5 – Lead Poisoning Prevention to obtain Lead-Safe, or Conditional Lead-Safe Status.

Regulated Facility means all residential rental units, all properties where a child younger than six years old lives or is expected to live in the next 12 months for 14 or more days per year, and all child care centers including preschools and kindergarten classrooms.

Required Actions if Lead Hazards are Identified at a Regulated Facility

- 1. NOTICE TO CORRECT LEAD HAZARDS:** A Notice to Correct Lead Hazards requires property owners to correct the environmental lead hazards identified in this report within **90 days** of receipt of the notice. (Exterior paint and soil hazards identified between November 1st and March 31st must be corrected by the following June 30th.) Except for "Spot Removal Exemption" areas, a licensed Lead Renovation Firm or Lead Contractor must perform the work.
- 2. NOTICE OF VIOLATION:** A Notice of Violation requires property owners to correct **all** environmental lead hazards within **30 days** of receipt of the notice. (Exterior paint and soil hazards identified between November 1st and March 31st must be corrected by the following June 30th.) A licensed Lead Contractor must perform the work unless RIDOH approves a variance request in writing.
- 3. EXTENSION:** Property owners may request an extension to the above compliance period(s) by submitting in writing detailed information on the reason(s) for the delay, the person who will correct the hazards, and by what date. Mail requests to the Lead Program Manager, RI Department of Health, Room 206, 3 Capitol Hill, Providence, RI 02908, fax to (401) 222-2456 or 222-7759, or e-mail to doh.leadprogram@health.ri.gov within 20 days of receiving this report.
- 4. SPOT REMOVAL EXEMPTION:** A licensed Lead Renovation Firm or Lead Contractor is not required when the scope of work does not exceed **6 ft² of interior lead-based paint** or **20 ft² of exterior lead-based paint**, provided that the work does not include window replacement or interior demolition and no work practices prohibited by 216-RICR-50-15-12 are used. **A licensed Lead Renovation Firm or Lead Contractor is always required for window replacement or interior demolition.**
- 5. CLEARANCE INSPECTION:** A Clearance Inspection by a Lead Inspector is required when lead hazard reduction or lead hazard control work is completed. This Clearance Inspection must include a visual inspection of all Lead-Hazard areas/media identified in this report and for interior work, **dust wipe sampling** in accordance with 216-RICR-50-15-5. As a minimum, the EPA Cleaning Verification Procedure by a certified Lead Renovator is required for interior renovation, repair, and painting (RRP) work.

- For questions regarding this property and inspection report, lead hazard reduction or lead hazard control options, and regulatory requirements, contact the Lead Inspector listed on page 1 of this report.
- For additional information about lead, including properties with lead violations, and to find a licensed lead professional, call the Center for Healthy Homes and Environment at (401) 222-7796 or visit www.health.ri.gov/healthrisks/poisoning/lead
- For additional requirements regarding rental properties and Certificates of Conformance, call (401) 222-7796 or visit the RIDOH lead certificate page at <https://health.ri.gov/find/environmentallead/propertystatus/>.




FLOOR PLAN PROPERTY SKETCH (BLOCK)

Street Address: 50 Aylsworth Ave. Unit: 2R City: Woonsocket


Floor 2

Floor _____

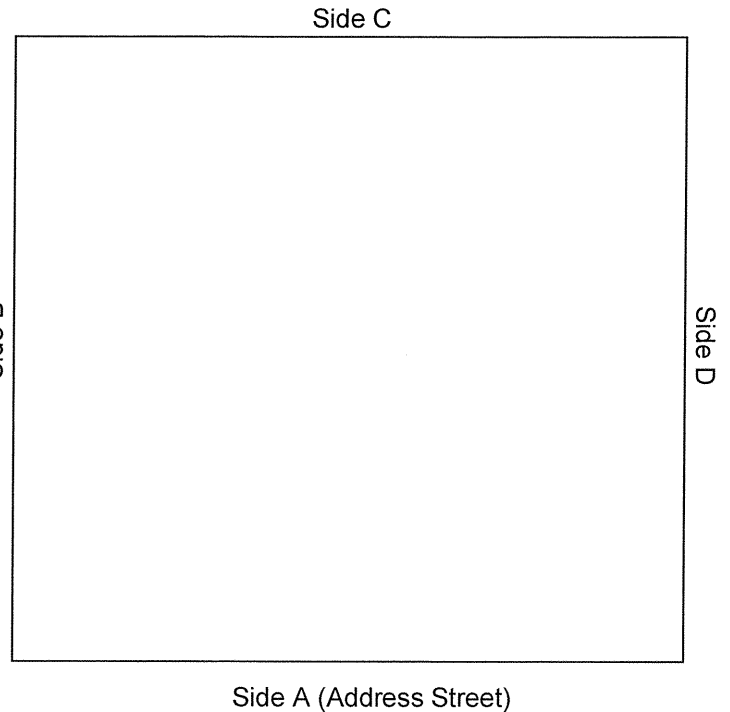

Floor _____

Floor _____

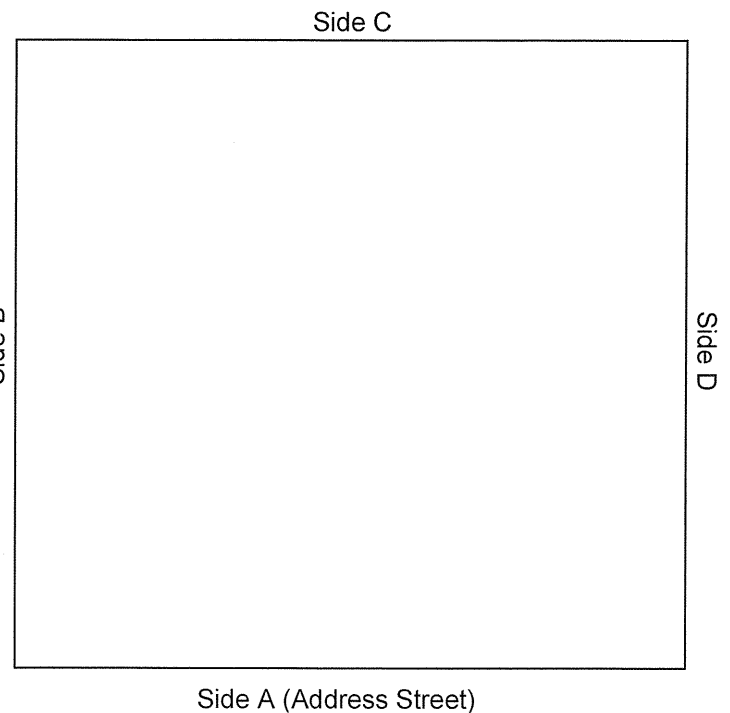


Initials JEE Date 01/11/24



FLOOR PLAN/PROPERTY SKETCH (GRID)

Street Address: 50 Aylsworth Ave. Unit: 2R City: Woonsocket

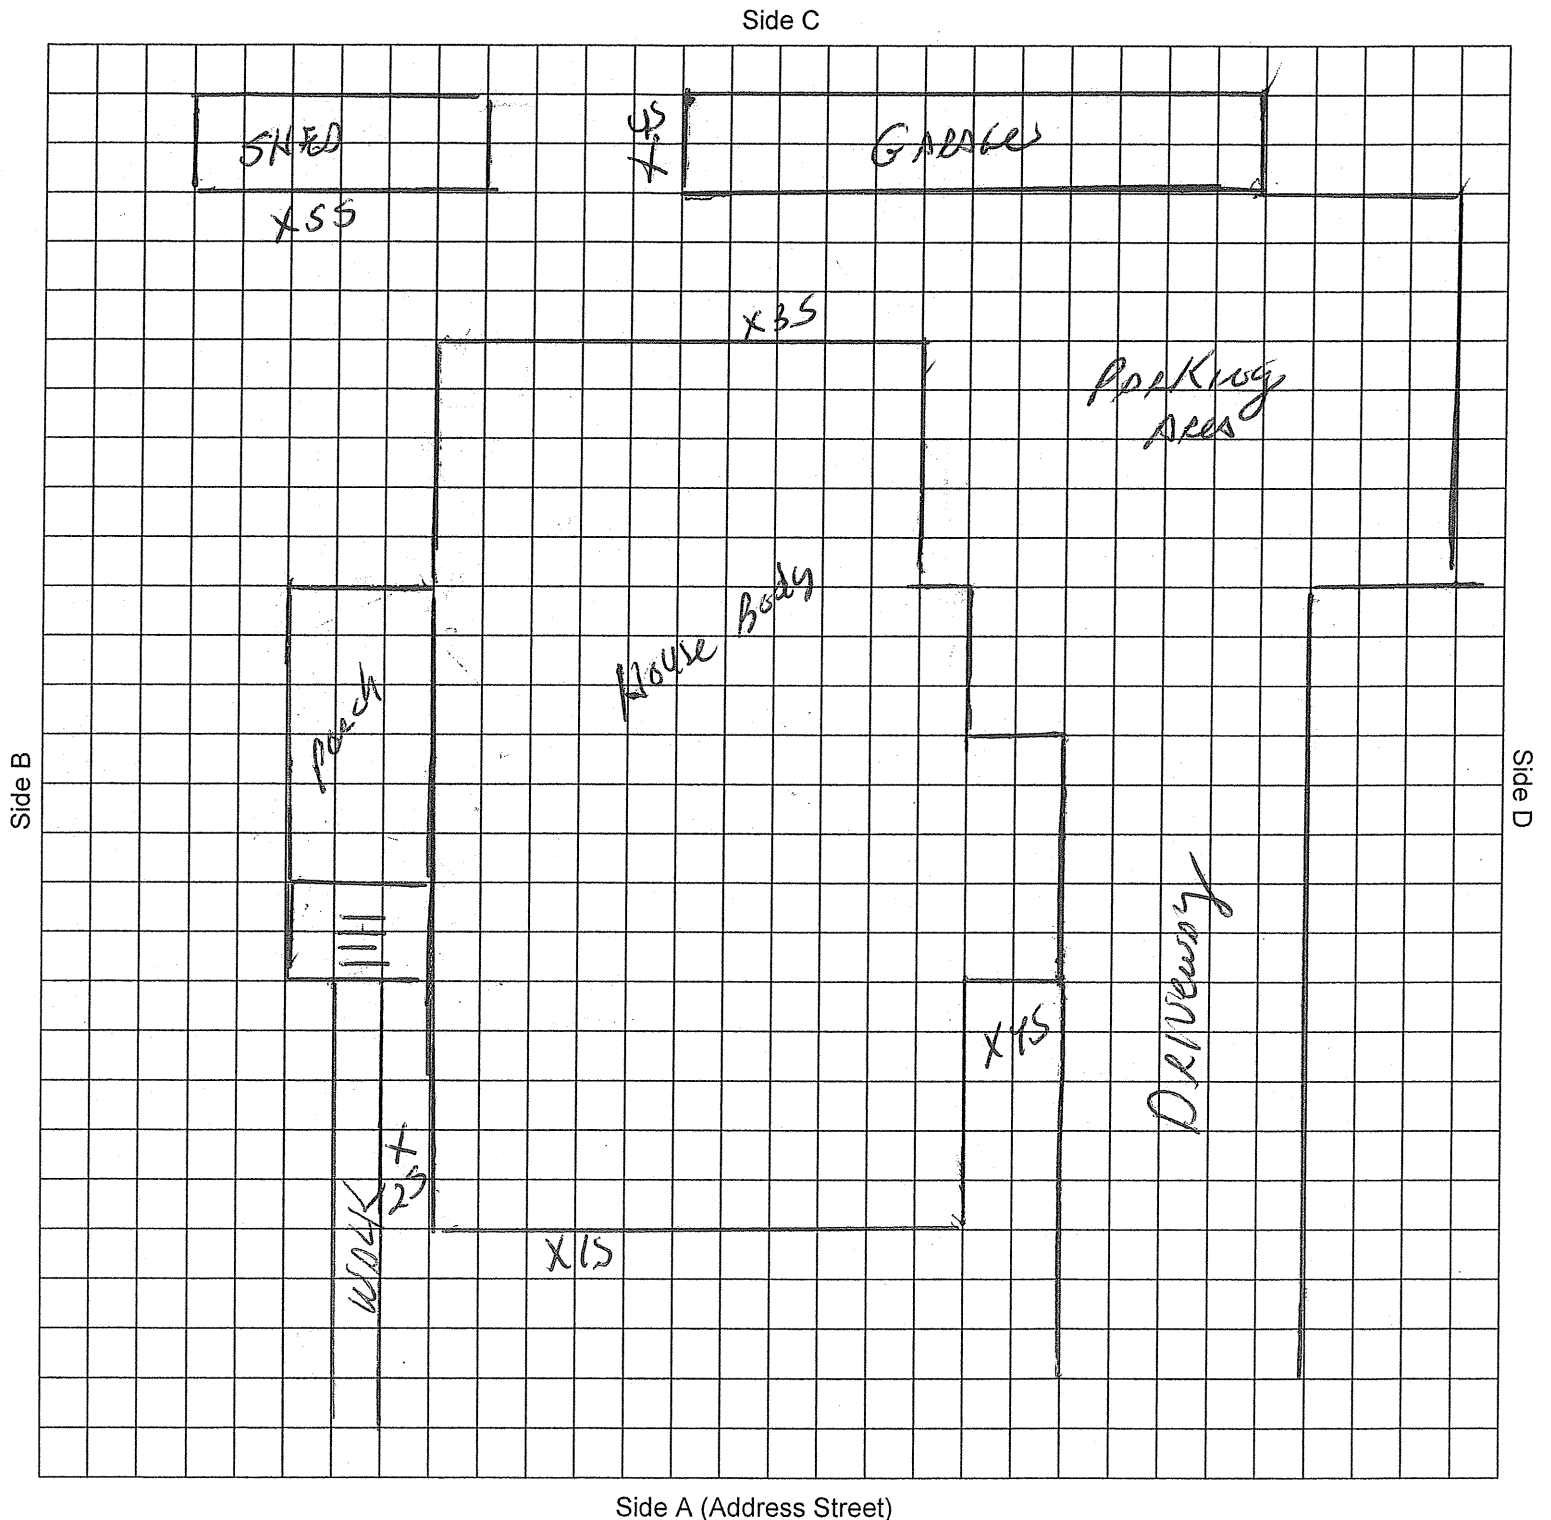

Initials JEE Date 01/11/24

Street Address: 50 Aylsworth Ave. Unit: 2R City: Woonsocket**REPORT KEY**

XRF:

Positive means greater than or equal to 1.0 mg/cm² or **AP** = Assumed Positive for pre-1978 paint
Negative means less than 1.0 mg/cm² or **78** = post-1978 paint
Inconclusive is in accordance with the XRF manufacturer's Performance Characteristic Sheet (PCS)

Test Kit:

Positive reaction (pink or red) is "+" **Inconclusive** (no reaction) is "-"

Paint Chip Sample:

Lead-Safe means 90 ppm to less than 5,000 ppm or post-1978
Conditionally Lead-Safe means **INTACT** lead-based paint greater than or equal to 5,000 ppm (percent by weight) or 1.0 mg/cm² (by measured area)
Lead-Hazard means **DAMAGED** lead-based paint greater than or equal to 5,000 ppm or 1.0 mg/cm²

Paint Condition:

N=No Paint **I**=Intact **D**=Damaged **AD**=Assumed Damaged **B**=Binding or Friction

Lead:

S= Lead-Safe **C**=Conditionally Lead-Safe **H**=Lead-Hazard

Remedy:

COV=Covered **MI**=Made Intact **REM**=Removed **REP**=Replaced

XRF CALIBRATION DATAManufacturer, Model & Serial # SciAps X-550 SN 00639Standard Type (check one): Manufacturer ☒ NIST ☐ Other (specify) _____

Standard (mg/cm ²)	Time of Test	Reading 1	Reading 2	Reading 3	Average (mg/cm ²)	Tolerance
1.0	9:02	1.1	1.0	1.1	1.1	0.1
1.0	12:56	1.1	1.0	1.0	1.0	0.0

Comments:

Initials JEEDate 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 7 of 19

Street Address: 50 Aylsworth Ave.

Unit: 2R City: Woonsocket

Room #: 2 Description (check one): ☒ Kitchen ☐ Pantry ☐ Bathroom

Surface	Side	XRF	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall <u>Upper</u>	A	0.1			
Wall	B	0.0			
Wall	C	0.0			
Wall	D	0.2			
Chair Rail	All	0.0			
Baseboard	All	0.0			
Radiator	X				
Floor		COV	I	C	
Door	All	0.2			
Door Casing	J	0.0			
Door Jamb	J	0.1			
Threshold	B	0.0			
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	B	0.0			
Closet Casing	J	0.0			
Closet Jamb	J	0.1			
Closet Ceiling	J	0.0			
Closet Wall	J	0.2			
Closet Shelf	J		N		
Shelf Support	J	0.0			
Closet Pole	J		N		
Cl Baseboard	X				
Closet Floor	B	COV	I	C	

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	All	0.0			
Window Apron	X				
Window Casing	All	0.1			
Window Jamb	J	0.0			
Interior Stop	J	0.0			
Interior Sash	J		N		
Window Well	J				
Window Track	J				
Exterior Sash	J				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Upper Cab Door	C	0.0			
Upper Cab Frame	J	0.0			
Upper Cab Wall	J	0.1			
Upper Cab Shelf	J	0.0			
Shelf Support	X				
Lower Cab Door	C	0.1			
Lower Cab Frame	J	0.2			
Lower Cab Wall	J	0.0			
Lower Cab Shelf	J	0.0			
Shelf Support	X				
Cabinet Drawer	C	0.0			
Lower Walls	All	0.0			
Closet Low Walls	All	0.0			
Closet Chair Rail	All	0.1			

XRF: Positive $\geq 1.0 \text{ mg/cm}^2$, Test Kit "+", or "AP" = Assumed Positive; Negative $< 1.0 \text{ mg/cm}^2$ or "78" = Post-1978
Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 8 of 19

Street Address: 50 Aylsworth Ave.

Unit: 2R City: Woonsocket

Room #: 3 Description (check one): ☐ Kitchen ☐ Pantry ☒ Bathroom

Surface	Side	XRF	Condition	Lead	Remedy
Ceiling		COV	I	C	
Crown Molding	All	0.0			
Wall Upper	A	0.0			
Wall	B	0.1			
Wall	C	0.0			
Wall	D	0.1			
Chair Rail	All	0.0			
Baseboard	All		N		
Radiator	X				
Floor		COV	I	C	
Door	All	0.0			
Door Casing	↓	0.1			
Door Jamb	↓	0.0			
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	B	0.0			
Closet Casing	X				
Closet Jamb	B	0.0			
Closet Ceiling	↓		N		
Closet Wall	↓		N		
Closet Shelf	↓	0.0			
Shelf Support	X				
Closet Pole	X				
Cl Baseboard	X				
Closet Floor	B	0.0			

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	C	0.0			
Window Apron	X				
Window Casing	C	0.1			
Window Jamb	↓	0.0			
Interior Stop	↓	0.0			
Interior Sash	↓		N		
Window Well	↓				
Window Track	↓				
Exterior Sash	↓				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Upper Cab Door	X				
Upper Cab Frame	X				
Upper Cab Wall	X				
Upper Cab Shelf	X				
Shelf Support	X				
Lower Cab Door	A	P78			
Lower Cab Frame	↓	↓			
Lower Cab Wall	↓	↓			
Lower Cab Shelf	X				
Shelf Support	X				
Cabinet Drawer	X				
Lower Walls	All	COV	I	C	
Medicine Cab.	A		N		

XRF: Positive $\geq 1.0 \text{ mg/cm}^2$, Test Kit "+", or "AP" = Assumed Positive; Negative $< 1.0 \text{ mg/cm}^2$ or "78" = Post-1978
 Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
 S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



INTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 10 of 19Street Address: 50 Aylsworth Ave.Unit: 2R City: WoonsocketRoom #: _____ Description (check one): ☒ Hallway ☒ Staircase (separate page required for each one)Side Common

Surface	Side	Pb	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall <u>Upper</u>	A	0.0			
Wall	B	0.1			
Wall	C	0.0			
Wall	D	0.0			
Chair Rail	All	0.0			
Baseboard	X				
Radiator	X				
Floor		COV	I	C	
Door <u>1st Floor</u>	A	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	1.7	D	H	
Threshold	↓	1.4	D	H	
Door <u>1st Floor</u>	C/D	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	D	0.0			
Door <u>2nd Floor</u>	A	0.0			
Door Casing	↓	0.1			
Door Jamb	↓	1.7	D	H	
Threshold	↓	1.8	D	H	
Door <u>2nd Floor</u>	C/D	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.0			
Threshold	D	0.1			
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Wall Casing	All	0.0			

Surface	Side	Pb	Condition	Lead	Remedy
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				
Window Sill	C	0.0			
Window Apron	↓	0.0			
Window Casing	↓	0.0			
Window Jamb	↓	0.0			
Interior Stop	↓	0.1	Fixed		
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Handrail		0.0			
Newell Post	X				
Stair Tread		COV	I	C	
Stair Riser		0.0			
Baluster	X				
Stringer	X				

XRF: Positive ≥ 1.0 mg/cm²; Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978
 Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
 S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



Street Address: 50 Aylsworth Ave.

Unit: 2R City: Woonsocket

Room #: _____ Description (check one): ☐ Hallway ☒ Staircase (separate page required for each one)


Basement Entry

Surface	Side	Pb	Condition	Lead	Remedy
Ceiling		0.0			
Crown Molding	X				
Wall	Upper A	0.0			
Wall	B	0.1			
Wall	C	0.0			
Wall	D	0.0			
Chair Rail	All	0.0			
Baseboard	X				
Radiator	X				
Floor		COV	I	C	
Door	A	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	0.1			
Threshold	X				
Door	C	0.0			
Door Casing	↓	0.0			
Door Jamb	↓	2.7	D	H	
Threshold	↓	0.0			
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Closet Door	C		N		
Closet Casing	↓		N		
Closet Jamb	↓		N		
Closet Ceiling	↓		N		
Closet Wall	↓		N		
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				

Surface	Side	Pb	Condition	Lead	Remedy
Closet Door	X				
Closet Casing	X				
Closet Jamb	X				
Closet Ceiling	X				
Closet Wall	X				
Closet Shelf	X				
Shelf Support	X				
Closet Pole	X				
CI Baseboard	X				
Closet Floor	X				
Window Sill	B		N		
Window Apron	X				
Window Casing	B	1.1	I	C	
Window Jamb	B	1.6	D	H	
Interior Stop	X				
Interior Sash	B	2.4	D	H	
Window Well	B	2.3	D	H	
Window Track	X				
Exterior Sash	B	6.1	D	H	
Exterior Stop	X				
Window Sill	X				
Window Apron	X				
Window Casing	X				
Window Jamb	X				
Interior Stop	X				
Interior Sash	X				
Window Well	X				
Window Track	X				
Exterior Sash	X				
Exterior Stop	X				
Handrail	X				
Newell Post	X				
Stair Tread	X				
Stair Riser	X				
Baluster	X				
Stringer	X				

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978
Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction
S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV = Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24



Porch: 2nd Floor B Side Porch (separate page required for each porch)

[illegible]

Initials JEE Date 01/11/24



EXTERIOR PAINT INSPECTION (REQUIRED IF BUILT PRE-1978)

page 12 of 19

Street Address: 50 Aylsworth Ave.

Unit: 2R City: Woonsocket

Primary Structure: House Body

Surface	Side	XRF	Condition	Lead	Remedy
Siding	All	COV	I	C	
Corner Board	All	COV	I	C	
Upper Trim	All	COV	I	C	
Lower Trim	All	COV	I	C	
Storm Door	C		N		
Door	X				
Door Casing	C1	COV	I	C	
Door Jamb	C1	COV	I	C	
Threshold	C1	12	D	N	
Kick Plate	C1	COV	I	C	
Storm Door	C2		N		
Door	C2	34	I	C	
Door Casing	C2	COV	I	C	
Door Jamb	C2	19.9	D	N	
Threshold	C2	00			
Door Kickplate	X				
Storm Door	X				
Door	X				
Door Casing	X				
Door Jamb	X				
Threshold	X				
Kick Plate	X				
Overhang	C	00			
Column	X				
Newel Post	X				
Railing Cap	X				
Baluster	X				
Lower Rail	X				
Handrail	A	0.1			
Tread	A	00			
Riser	A	0.1			
Stringer					
Lattice	A/D	15.0	D	H	
Wall	A		N		
Steps	C		N		

Surface	Side	XRF	Condition	Lead	Remedy
Window Sill	All	COV	I	C	
Window Casing	I	COV	I	C	
Window Sash	I		N		
Window Sill	X				
Window Casing	X				
Window Sash 3F	D				
Window Sill	X				
Window Casing	X				
Window Sash	X				
Window Sill	X				
Window Casing	X				
Window Sash	X				
Window Shutter	X				
Fire Escape	D	0.1			
BA Window Sill	All	4.2	D	H	
BA Window Sash	I	1.2	D	H	
BA Window Frame	I	62	D	H	
BA Screen Frame	I	0.1			
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
BA Window Sill	X				
BA Window Sash	X				
BA Window Frame	X				
BA Screen Frame	X				
Foundation	All		N		
Bulkhead	X				
Drain Pipe	X				
Electrical Conduit	B/D	0.0			
Lamp Post	X				
Fence	All		N		

XRF: Positive ≥ 1.0 mg/cm², Test Kit "+", or "AP" = Assumed Positive; Negative < 1.0 mg/cm² or "78" = Post-1978

Condition: N = No Paint; I = Intact; D = Damaged; AD = Assumed Damaged; B = Binding or Friction

S = Lead-Safe; C = Conditionally Lead-Safe (Positive/Intact); H = Lead-Hazard (Positive/Damaged) Remedy: COV =

Covered; MI = Made Intact; REM = Removed; REP = Replaced

Initials JEE Date 01/11/24

**DUST INSPECTION**
 Street Address: 50 Aylsworth Ave. Unit: 2R City: Woonsocket

 Sampling Date: 01/11/24 Analyzing Laboratory or ELPAT Accreditation: Schneider Laboratories Global, Inc

Sample #	Room #/Side	Dust Wipe Surface	*Sample Area (Dimensions)	Lab Result ($\mu\text{g}/\text{ft}^2$)	Lead
1D	Rm 1 / C	Floor	12 x 12	< 5.00	S
2D	Rm 1 / D	Sill	4 1/2 x 31	20.1	S
3D	Rm 2 / A	Floor	12 x 12	6.42	S
4D	Rm 2 / B	Sill	4 1/2 x 31	22.0	S
5D	Rm 3 / C	Floor	12 x 12	< 5.00	S
6D	Rm 3 / C	Sill	4 1/2 x 31	< 5.16	S
7D	Rm 4 / A	Floor	12 x 12	< 5.00	S
8D	Rm 4 / A	Sill	4 1/2 x 31	22.0	S
KEY: S = Lead-Safe H = Lead-Hazard *minimum 16 square inches; maximum 2 square feet					

 Comments:

 Initials JEE Date 01/11/24

Street Address: 50 Alysworth Ave. Unit: Commons City: Woonsocket

[illegible]

Initials JEE Date 01/11/24

**SOIL INSPECTION**Street Address: 50 Aylsworth Ave. Unit: 2R City: WoonsocketSampling Date: 01/11/24 Analyzing Laboratory or ELPAT Accreditation: Schneider Laboratories Global, Inc*If soil sampling was not performed, check all reasons that apply:*Covered by Ice/Snow ☐ Covered by Debris ☐ Other ☐ (specify) _____

Sample #	Structure/Area	Side	Distance (ft. or in)	Depth (ft. or in)	Bare (Y or N)	Result (ppm)	Lead
1S	Primary	A	< 3 ft.	1 in.	Y	55.3	S
2S	Primary	B	< 3 ft.	1 in.	Y	1120	H
3S	Primary	C	< 3 ft.	1 in.	Y	319	S
4S	Primary	D	< 3 ft.	1 in.	Y	559	H
	Play Area						
	Mid Yard						
5S	Garage	B	< 3 ft.	1 in.	Y	351	S
6S	Shed	A	< 3 ft.	1 in.	Y	445	H
	Fence						
	Play Equipment						
	Outdoor Furniture						
	Other						
KEY: S = Lead-Safe C = Conditionally Lead-Safe (covered) H = Lead-Hazard							

Indicate location(s) of soil sample collection on Form PBLC-23-3**Comments:**Initials JEE Date 01/11/24

**WATER INSPECTION**Street Address: 50 Aylsworth Ave. Unit: 2R City: WoonsocketSampling Date: 01/11/24 Analyzing Laboratory: Schneider Laboratories Global, Inc**Water Source:** Public Water Supplier: City of Woonsocket ☐ Private Well ☐ Unknown ☐(Check all that apply): Lead Service Line ☐ Lead Pipe / Gooseneck ☐ Non-Lead Service Line ☐ Unknown ☒

Sample #	Room #/Fixture	*First Draw (Y/N)	**Flushed Sample (Y/N)	Result (ppb)	Lead Hazard (Y/N)
4W	Kitchen Faucet	N	Y	< 5.00	N

*First Draw Sample: Has it been at least 6 hours since any water was last used?
**Flushed Sample: Collected after one minute or until water turns cold

RIDOH RECOMMENDED ACTIONS (Check all that apply):

- ☒ Use only cold water for drinking and cooking.
- ☒ Do not consume water without flushing until temperature drops.
- ☐ Do not consume water until lead level(s) <15 ppb is achieved.
- ☐ Owner must provide bottled water for cooking and drinking until RIDOH approves additional lead sampling results.
- ☐ Owner must label all taps "Lead Warning: Do not use for drinking or cooking".
- ☐ Filtration systems must be maintained and filters replaced per manufacturer's instructions.
- ☐ Other (specify) _____

Comments:Initials JEE Date 01/11/24



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475**Customer** ENVIRONMENTAL LEAD DETECTION (482)
Address 436 Gardners Neck Rd
Swansea, MA 02777-3105**Order #:** 546690**Matrix** Wipe
Received 01/16/24
Analyzed 01/16/24
Reported 01/18/24**Project** 50 Aylsworth Ave Apt 2 Rear
Location Woonsocket
Number

Sample ID	Cust. Sample ID	Location	Sample Date			
Parameter		Method	Area	Total	Conc.	RL*
546690-001	1D	Rm 1 Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546690-002	2D	Rm 1 Sill Side D	01/11/24			
Lead		EPA 7000B	0.969 ft2	19.5 µg/wipe	20.1 µg/ft2	5.16 µg/ft2
546690-003	3D	Rm 2 Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	6.42 µg/wipe	6.42 µg/ft2	5.00 µg/ft2
546690-004	4D	Rm 2 Sill Side C	01/11/24			
Lead		EPA 7000B	0.969 ft2	21.3 µg/wipe	22.0 µg/ft2	5.16 µg/ft2
546690-005	5D	Rm 3 Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546690-006	6D	Rm 3 Sill Side C	01/11/24			
Lead		EPA 7000B	0.969 ft2	<5.00 µg/wipe	<5.16 µg/ft2	5.16 µg/ft2
546690-007	7D	Rm 4 Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	<5.00 µg/wipe	<5.00 µg/ft2	5.00 µg/ft2
546690-008	8D	Rm 4 Sill Side D	01/11/24			
Lead		EPA 7000B	0.969 ft2	21.3 µg/wipe	22.0 µg/ft2	5.16 µg/ft2

Analyst SA
546690-01/18/24 11:04 AMReviewed By **Ahmed Elnasseh**
Analyst**EPA Lead Clearance as of 1/1/2024**

Location	Level	Unit
Floors	< 10.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 400	µg/ft2

HUD Lead Clearance as of 1/1/2024

Location	Level	Unit
Interior Floors	< 10.0	µg/ft2
Porch Floors	< 40.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 100	µg/ft2

Minimum Total Reporting Limit: 5.0 µg/wipe. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer ENVIRONMENTAL LEAD DETECTION (482)
Address 436 Gardners Neck Rd
Swansea, MA 02777-3105

Order #: 546693

Matrix Wipe
Received 01/16/24
Analyzed 01/16/24
Reported 01/17/24

Project 50 Aylsworth Ave Side Common
Location Woonsocket
Number

Sample ID	Cust. Sample ID	Location	Sample Date			
Parameter		Method	Area	Total	Conc.	RL*
546693-001	9D	Common Floor Side B	01/11/24			
Lead		EPA 7000B	1.00 ft2	777 µg/wipe	777 µg/ft2	25.0 µg/ft2
546693-002	10D	Common Sill Side C	01/11/24			
Lead		EPA 7000B	0.750 ft2	65.1 µg/wipe	86.7 µg/ft2	6.67 µg/ft2
546693-003	11D	Blank	01/11/24			
Lead		EPA 7000B		<5.00 µg/wipe		5.00 µg/wipe

Analyst SA
546693-01/17/24 01:34 PM

Reviewed By **Ahmed Elnasseh**
Analyst

EPA Lead Clearance as of 1/1/2024

Location	Level	Unit
Floors	< 10.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 400	µg/ft2

HUD Lead Clearance as of 1/1/2024

Location	Level	Unit
Interior Floors	< 10.0	µg/ft2
Porch Floors	< 40.0	µg/ft2
Interior Window Sills	< 100	µg/ft2
Window Troughs	< 100	µg/ft2

Minimum Total Reporting Limit: 5.0 µg/wipe. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475**Customer:** ENVIRONMENTAL LEAD DETECTION (482)
Address: 436 Gardners Neck Rd
Swansea, MA 02777-3105**Order #:** 546684**Matrix** Soil
Received 01/16/24
Analyzed 01/16/24
Reported 01/16/24**Attn:**
Project: 50 Alysworth Ave
Location: Woonsocket
Number:**PO Number:**

Sample ID	Cust. Sample ID	Location	Sample Date	Weight			
Parameter		Method		Total µg	% / Wt.	Conc.	RL*
546684-001	1S	Side A	01/11/24	1110 mg			
Lead		EPA 7000B		61.2 µg	0.00553 %	55.3 mg/kg	9.03 mg/kg
546684-002	2S	Side B	01/11/24	1110 mg			
Lead		EPA 7000B		1240 µg	0.112 %	1120 mg/kg	45.1 mg/kg
546684-003	3S	Side C	01/11/24	1100 mg			
Lead		EPA 7000B		352 µg	0.0319 %	319 mg/kg	9.08 mg/kg
546684-004	4S	Side D	01/11/24	1020 mg			
Lead		EPA 7000B		569 µg	0.0559 %	559 mg/kg	19.6 mg/kg
546684-005	5S	Garage Side B	01/11/24	1110 mg			
Lead		EPA 7000B		391 µg	0.0351 %	351 mg/kg	8.98 mg/kg
546684-006	6S	Shed Side A	01/11/24	1110 mg			
Lead		EPA 7000B		495 µg	0.0445 %	445 mg/kg	18.0 mg/kg

Analyst: SA
546684-01/16/24 04:33 PM*Kelly Muncy*Reviewed By: Kelly Muncy
Manager**EPA Lead in Residential Soil as of 1/1/24**

Location	Level	Unit
Play Areas	400	mg/kg
Bare Soil Average	1200	mg/kg

Minimum reporting limit: 10.0 µg. EPA does not distinguish between lead-contaminated soil and soil-lead hazards. All internal QC parameters were met. Unusual sample conditions, if any, are described. Do not reproduce this report except in full. Values are reported to three significant figures. PPM = mg/kg | PPB = µg/kg. The test results apply to the sample as received. AIHA LAP, LLC accredited for Lead (Lab ID 100527).



Analysis Report

Schneider Laboratories Global, Inc

2512 W. Cary Street • Richmond, Virginia • 23220-5117
804-353-6778 • 800-785-LABS (5227) • Fax 804-359-1475

Customer: ENVIRONMENTAL LEAD DETECTION (482)
Address: 436 Gardners Neck Rd
Swansea, MA 02777-3105

Order #: 546692

Matrix Drinking Water
Received 01/16/24
Reported 01/18/24

Attn:
Project: 50 Aylsworth
Location: Woonsocket
Number:

PO Number:

Sample ID	Cust. Sample ID	Location	Result	RL*	Units	Analysis Date	Analyst
Parameter		Method					
546692-001	1W	Kitchen Faucet Ap 1 Front					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA
546692-002	2W	Kitchen Faucet Ap 1 Rear					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA
546692-004	4W	Kitchen Faucet Ap 2 Rear					
Metals Analysis							
Lead		EPA 200.9 Rev 2.2	<5.00	5.00	µg/L	01/17/24	SA

546692-01/18/24 12:59 PM

Kelly Muncy

Reviewed By: Kelly Muncy
Manager

EPA Regulatory Limits

Parameter	Reg. Limit	Unit
Lead	15.0	µg/L

State Certifications

Method	Parameter	Rhode Island	Virginia
EPA 200.9 Rev 2.2	Lead	ELAP Certified	VELAP Certified
State	Certificate Number		
Rhode Island	ELAP LAO00084		
Virginia	VELAP 12664		

All internal QC parameters were met. Unusual sample conditions, if any, are described. Surrogate Spike results designated with "D" indicate that the analyte was diluted out. "MI" indicates matrix interference. Concentration and *Reporting Limit (RL) based on areas provided by client. Values are reported to three significant figures. Solid PPM = mg/kg | PPB = µg/kg and Water PPM = mg/L | PPB = µg/L. The test results apply to the sample as received.