
City of Woonsocket

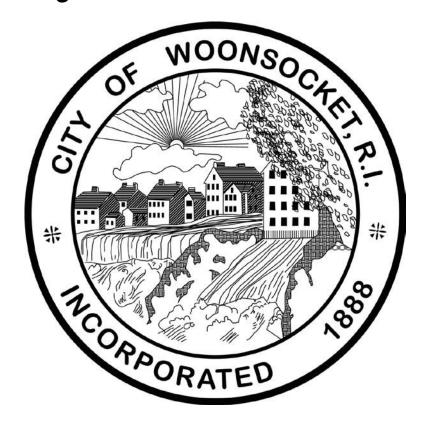

INSTALLATION OF PORTLAND CEMENT CONCRETE SIDEWALKS

BID No. 6214

Bid Specifications

Prepared By: City of Woonsocket

Department of Public Works February 2024



CITY OF WOONSOCKET, RHODE ISLAND INVITATION TO BID FOR: INSTALLATION OF PORTLAND CEMENT CONCRETE SIDEWALKS

BID No. 6214

For The Department of Public Works

City of Woonsocket is accepting bid proposals for the above-referenced project.

<u>Bid Opening:</u> Bids must be received by Woonsocket City Hall, Office of Purchasing, 169 Main Street, Woonsocket, RI 02895 prior to the bid opening date and time. On time bids will be publicly opened and read aloud in Harris Hall, located on the 3rd floor of Woonsocket City Hall, promptly starting at **2:00 p.m. on**<u>Tuesday, March 19, 2024.</u> Bids received after this deadline will not be accepted and will be returned unopened to the sender.

<u>Bid Submissions:</u> All bids must be submitted in duplicate, placed in a sealed envelope and identified with the following information: "INSTALLATION OF PORTLAND CEMENT CONCRETE SIDEWALKS – BID# 6214." Bids must be prepared using the provided bid forms. All forms must be typed or printed and then signed and dated in ink.

<u>Project Components:</u> furnish all labor, equipment, materials, tools, supplies, mobilization, transportation, overhead items and all other incidental items for the complete installation of Portland Cement Concrete Sidewalks at various locations throughout the City of Woonsocket

<u>Project Timeline:</u> The term of the contract will become effective from the date of the award letter notification and will remain in full force and effect for a period of 12 twelve consecutive months thereafter.

<u>Questions:</u> Questions regarding this solicitation should be submitted via email to Ken Allaire, Purchasing Agent, at <u>ken.allaire@woonsocketri.org</u>. The deadline to submit questions **is Tuesday, March 12, 2024, prior to 4:30 p.m.** Answers will be published online by the City in the form of an Addendum. Any questions submitted after the deadline may not be considered. Do not contact any other City employee or official regarding this solicitation.

<u>Bid Bond:</u> The bidder is required to furnish a bid guarantee in the form of a firm commitment, e.g., a Bid Bond supported by good and sufficient surety or sureties acceptable to the City, postal money order, certified check, or cashier's check made payable to the City of Woonsocket. The amount of the bid surety is \$1,000.00.

<u>Performance/Payment Bond</u>: A Performance and Payment Bond issued in a sum equal to \$20,000.00 will be required from the successful bidder.

<u>Prevailing Wages:</u> In accordance with RI General Law 37-13-7 contracts in excess of \$1,000 require compensation based on prevailing wages for construction, alteration and/or repair, painting and decorating.

Nonresident Contractors: In accordance with Rhode Island General Law 44-1-6, nonresident contractors are subject to a 3% withholding of the contract price to secure payment of any sales tax, use tax, and/or income tax withheld that may be due the State of Rhode Island. WBE, MBE and Section 3 contractors are encouraged to bid.

<u>Bid:</u> In conformance with the terms and conditions of these specifications including the Invitation to Bid and other documentary forms therewith, the Bidder hereby proposes, offers and agrees if this bid be accepted within sixty (60) calendar days from the date of bid opening to do all things necessary to fully perform and satisfy all terms, conditions and requirements of the subject specifications.

<u>Withdrawal of Bids:</u> No bidder may withdraw their bid within sixty (60) days after the actual time and date of the bid opening thereof.

<u>Rejection of Bids:</u> The City reserves the right to cancel this ITB, award on the basis of cost alone, accept or reject any or all bids, in whole or in part. The City further reserves the right to waive as an informality any irregularities contained in any bid not affecting substantial rights that may be in the City's best interest. Proposals found to be technically or substantially nonresponsive at any point in the review process will be rejected and not considered further. Any such decision will be considered final.

<u>Bid Award:</u> Upon selection of a winning contractor, the City of Woonsocket will send a bid award notice to the awardee. The bid award notice will identify a point of contact from the City who will assist the awardee in completing any pre-work requirements. Upon satisfactory meeting all of the obligations of the pre-wok requirements, the City of Woonsocket will issue a "Notice to Proceed" for work to commence.

Individuals requesting interpreter services for the hearing impaired should call the Finance Director at 401-762-6400 seventy-two (72) hours in advance of the bid opening deadline.

Thank you for your consideration of this invitation to bid and your participation in this bid process.

Published:	February 22, 2024	
<u>X</u>		
Christine (Chamberland,	
Finance Di	irector	

CITY OF WOONSOCKET RHODE ISLAND FINANCE DEPARTMENT

TECHNICAL SPECIFICATIONS

SECTION 1 - GENERAL

1.1 SCOPE OF WORK

The Contractor is to furnish all labor, equipment, materials, tools, supplies, mobilization, transportation, overhead items and all other incidental items for the complete installation of "Portland Cement Concrete Sidewalks" at various locations throughout the City of Woonsocket as directed by the City Engineer, his authorized designee or the Water Division.

- 1.1.1 The work, in general, will include but not be limited to:
 - A. Saw cut all edges of the required work area.
 - B. Excavate existing earth, asphalt concrete, cement concrete and/or rock, install forms as necessary and install new Portland cement concrete sidewalks as directed.
 - C. Excavate existing asphalt concrete "temporary patches" (6 square yards or less) at completed City of Woonsocket utility installations; excavate additional existing cement concrete and install new Portland cement concrete sidewalks as directed.
 - D. excavate additional unsuitable material below sub-grade and refill with suitable gravel bedding material, only as directed.
 - E. Remove and reset existing granite or pre-cast concrete curbing, only as directed.

1.2 ASSIGNMENT OF WORK

1.2.1 The Contractor will be provided with a list of locations for the installation of new Portland cement concrete sidewalks by the City of Woonsocket, Department of Public Works, Engineering Division or Water Division.

1.3 CONTRACTORS RESPONSIBILITIES:

- -Be responsible to obtain a "DIG SAFE" number prior to commencing work.
- -Provide Certified Payroll(s).
- -Disclose any subcontractors that will be used for this work, for approval by the City of Woonsocket.
- -Provide the location of where the removed asphalt, gravel and concrete will be transported to.
- -Disclose the vendor information for the asphalt to be supplied to the site.
- -Disclose the vendor information for the concrete to be supplied to the site.

-Contractor must provide a 'Competent Person', as defined by the US Department of Labor Occupational Safety & Health Administration (OSHA), for the location of the proposed work. The contractor will employ only competent and efficient laborers, operators and tradesmen for every kind of work, and whenever, in the opinion of the City Engineer, any person is unfit to perform their task, or does their work contrary to directions, or conducts themselves improperly, the contractor must discharge that person immediately and not employ that person again on the work.

-Obtain necessary police details for traffic control and safety. The City will only reimburse police detail cost at the standard detail rate. It is the responsibility of the contractor to schedule and or cancel the police detail within an acceptable time period so as not to accrue unnecessary cost. This is a reimbursement; therefore, the contractor must pay the police invoice before invoicing the City.

SECTION 2 - DEFINITIONS

ASTM:

"ASTM" stands for the: American Society for Testing and Materials.

BOULDER:

The word "Boulder", whenever used as the name of an excavated material or material to be excavated, will mean detached rock exceeding one half (1/2) cubic yard in volume.

CITY ENGINEER:

The word "City Engineer" whenever used, will mean the "City Engineer for the City of Woonsocket, Rhode Island or his authorized designee, including Water Department Personnel.

EARTH:

The word "Earth", whenever used as the name of an excavated material or material to be excavated will mean all kinds of material, except rock or boulder, as defined above.

OWNER:

The word "Owner" will mean the City of Woonsocket, Rhode Island, acting through its Purchasing Agent, its City Engineer and/or their authorized designees.

PATCHES:

The word "Patches", whenever used, will refer to portions of existing Portland Cement concrete and/or asphalt and/or grass sidewalks of one and a half (1.50 CY) cubic yards or less, which have been broken due to excavations for the installation of water services, hydrants, sewer connections, tree roots, upheavals, etc.

PURCHASING AGENT:

The word "Purchasing Agent" will mean the Purchasing Agent for the City of Woonsocket, Rhode Island

ROCK:

The word "Rock", whenever used as the name of an excavated material or material to be excavated, will mean solid ledge rock, which requires drilling, blasting, wedging or breaking up with power operated tools for its removal. No soft or disintegrated rock, which can be removed by pick or shovel, will be measured or allowed.

STATE SPECIFICATIONS:

"State Specifications" will mean the standard specifications for Road and Bridge Construction of the State of Rhode Island, Department of Transportation, Division of Public Works, 1997 Edition including the latest corrections and addenda.

SECTION 3 - MATERIALS

3.1 GRAVEL BEDDING

3.1.1 The gravel bedding for the sub-base, when applicable, will consist of a material or a mixture of hard, durable pebbles, rock fragments and soil binder, free from soft particles or clay and conforming to the following gradation:

Sieve Designation	Percentage By Weight Passing Through Square Mesh Sieves
3/4 inch	100
1/2 inch	50-85
3/8 inch	45-80
No. 4	40-75
No. 40	0-45
No. 200	0-10

3.2 CONCRETE

- 3.2.1 Portland cement concrete must be Class "B" (air-entrained), as specified in the State Specifications.
 - A. The coarse aggregate must be a maximum of three-quarters (3/4") of an inch.
 - B. All aggregate must be washed and screened.
 - C. The ultimate compressive strength of the concrete must not be less than 3,000 lbs. at 28 days.
 - D. The maximum allowable slump will be three (3") inches, unless otherwise approved.
 - E. All Portland cement concrete must contain at least six (6%) percent air within a tolerance of plus or minus one percent (+/- 1%).
- 3.2.2 Any deviation in the concrete material must be approved by the City Engineer before being used.

3.3 EXPANSION JOINTS

- 3.3.1 All expansion joint material must be included as part of each item in the Bid Proposal and installed wherever necessary or whenever directed by the City Engineer.
- 3.3.2 Expansion joint materials must be pre-formed, fillers with a minimum one-quarter (1/4") inch thickness by the full depth of concrete being installed (4", 6", or 8") and cut to length as required.

3.4 WIRE MESH

- 3.4.1 All wire mesh is to be included as part of each item in the Bid Proposal and installed wherever necessary or whenever directed by the City Engineer.
 - A. Wire mesh must be welded steel wire fabric conforming to ASTM Designation A-185 for welded wire fabric for concrete reinforcement.
 - B. Wire will be #8 gauge in 6" x 6" mesh.

3.5 FORMWORK

- 3.5.1 All formwork must be included as part of each item in the Bid Proposal and installed wherever necessary or whenever directed by the City Engineer.
 - A. Forms are to be made of steel or wood.
 - B. Forms that are bent, twisted, broken, or dirty will not be used.
 - C. Forms will be cleaned and oiled before use and be securely staked and braced.
 - D. They must have tight, rigid connections at joints.
 - E. Forms must extend to the full depth of the concrete.

SECTION 4 - METHODS OF WORK

4.1 SAW CUTTING OF EXISTING SIDEWALK

- 4.1.1 All saw cutting is to be included as part of each item in the Bid Proposal and be performed wherever necessary or whenever directed by the City Engineer.
 - A. All existing concrete or asphalt sidewalks will be cut at the closest control joint or as directed by the City Engineer with a walk-behind or hand-held concrete saw.
 - B. All equipment used in saw cutting must be satisfactory to the City Engineer.

4.2 EXCAVATION

- 4.2.1 The contractor will remove and properly dispose of existing materials as directed.
- 4.2.2 Excavations below the sub-grade involving rock or other unsuitable material, as determined to be necessary by the City Engineer, will be completed to such depths and back-filled with gravel to the proper sub-grade or as otherwise directed by the City Engineer.
- 4.2.3 The gravel must be properly placed and compacted to not less than ninety (90%) percent of the ASTM maximum dry density.

4.3 INSTALLATION

4.3.1 Portland cement concrete will be placed on a suitable gravel sub-base, as described above, and have a thickness of four (4") inches, six (6") inches for residential driveways or eight (8") inches for industrial driveways.

- 4.3.1.1 Welded steel wire mesh will be used whenever (6") and (8") thick concrete is poured.
- 4.3.2 The City reserves the right to prepare the work site and request that the contractor place the cement.
- 4.3.3 The contractor is being asked to supply bid numbers for each item based on the work site being ready for cement.
- 4.3.4 Longitudinal expansion joints must be placed at the back of all sidewalks, which abut rigid structures.
 - 4.3.4.1 If the structures are irregular in shape, the expansion joints are to be placed six (6") inches from the structures and parallel to the curb.
- 4.3.5 Lateral expansion joints will be placed not more than twenty (20') feet apart.
 - 4.3.5.1 A lateral expansion joint will be placed against all existing Portland cement concrete sidewalks.
- 4.3.6 All expansion joints will be placed against a good, clean, straight, rigid edge of an existing concrete wall, footing, sidewalk or form. If no proper edge exists, in the opinion of the City Engineer, then the Contractor will form and pour a section of concrete against which the expansion joint can be placed.
 - 4.3.6.1 Expansion joints are not allowed to be used as a form. Expansion joints will be installed around all hydrants and utility poles or as directed by the Director.
- 4.3.7 Construction (dummy) joints, to limit future cracking, are to be placed laterally not more than five (5') feet apart and cut into the pour at least 1/3 of the total depth of the proposed concrete thickness.
 - 4.3.7.1 The edges of the construction (dummy) joints are to be rounded with a one-quarter (1/4") inch radius-edging tool.
 - 4.3.7.2 The construction (dummy) joints in sidewalks greater than seven (7') feet wide will be placed longitudinally at the midpoint of the sidewalk. They are to be placed along the outside edge of the sidewalk, along the back of the curbing, along the edge of existing sidewalks, around all hydrants, water shut-off boxes, other utilities boxes or as directed by the Director.
- 4.3.8 The slope of sidewalks will be one-quarter (1/4") inch per foot from the property line to the top of the existing curb. The slope will not be changed, except by the City Engineer.
 - 4.3.8.1 The slope in the ramp in driveway openings are to be in accordance with the details, which are made part of these Specifications.
 - 4.3.8.2 The driveway ramp is to be installed so as to produce a smooth transition from the gutter line grade to the top of the sidewalk without interfering with the pedestrian walkway part of the public right-of-way.

The slope of the driveway ramp can only be changed when directed by the City Engineer.

- 4.3.9 All Portland Cement concrete sidewalks will be screened and floated with metal tools. The finished coat of the concrete is to be installed with a black, lightweight industrial broom.
 - 4.3.9.1 Curing of the Portland Cement concrete sidewalks must be for a period of at least seventy-two (72) hours. The rate of curing during hot weather will be controlled by keeping the concrete surface moist. The newly placed concrete is to be protected from freezing in cold weather with adequate protection satisfactory to the City Engineer. The Contractor will submit, in writing, a "protection plan" to the City Engineer for approval whenever concrete work must be done in cold weather.
 - 4.3.9.2 If concrete is to be cured with a membrane-curing compound, detailed information about the proposed compound must be submitted to the City Engineer for approval.
 - 4.3.9.3 The City of Woonsocket intends to avoid installation of concrete during extreme weather conditions, as much as possible.
- 4.3.10 The roadway pavement will be sawcut at all driveway openings only as necessary to place a form at the base of the driveway apron.
 - 4.3.10.1 The void left by the removal of the form will be temporarily back-filled by the Contractor.
 - 4.3.10.2 The permanent roadway pavement will be cut back 2' and patched by Contractor to the full depth of the existing pavement, or as directed.
- 4.3.11 Concrete will not be placed on rock, frozen ground or other unsuitable material.
- 4.3.12 Concrete will not be placed until the sub-grade has been prepared and forms are set.
- 4.3.13 Concrete will be placed with a minimum of handling and in one layer. Spading or vibrating of the concrete will be done adjacent to all forms and joints.
- 4.3.14 Placing of concrete is to be done continuously until completed.
- 4.13.15 The Contractor will insure that the welded wire mesh in industrial driveways is not twisted, folded or stepped on during placement. If so, it must be unfolded, straightened and/or pulled up into the concrete in accordance with the details, which are made part of these Specifications.
- 4.3.16 All work must be in accordance with the requirements of the American With Disabilities Act where applicable.

SECTION 5 - REMOVE AND RESET CURB

5.1 Curbs are to be removed and reset, only when authorized by the City Engineer.

- 5.1.1 The curb will be set on the sub-grade with the front top adjusted to the required line and grade.
- 5.1.2 The gravel will be compacted under the curb to maintain the desired alignment.
- 5.1.3 The joint spaces between the adjacent curb must be kept to a minimum.
- 5.2 Once resetting has been completed, the curb has to be backfilled on both sides with acceptable gravel material and compacted thoroughly to maintain the line and grade.

SECTION 6 - INSURANCE REQUIREMENTS

The successful bidder will furnish the City, prior to issuance of the contract, certificates of minimum insurance as listed below. These certificates must contain a provision that the insurance company will notify the certificate holder, by registered mail, at least 15 days in advance of any cancellation or material change.

Workman's Compensation	Statutory	
Employers Liability	\$100,000	Each Accident
Automobile Liability	\$1,000,000	Combined Single Limit
Commercial General Liability	\$2,000,000	General Aggregate
	\$2,000,000	Products & Completed Operations Aggregate
	\$1,000,000	Personal & Advertising Injury
	\$1,000,000	Each Occurrence
	\$100,000	Fire Damage (Any one fire)
	\$5,000	Medical Expenses (Any one person)

SECTION 7 - LICENSE/CERTIFICATE/PERMIT REQUIREMENTS

- 7.1 Permittee will provide a 'Competent Person', as defined by the US Department of Labor Occupational Safety & Health Administration (OSHA), for each work crew.
- 7.2 All equipment operators and workers performing work at the proposed location will hold, in good standing, the appropriate State of Rhode Island licenses for their responsibilities.
- 7.3 OSHA certified ten (10) hour construction safety program is required for all on-site employees.
- 7.4 Contractor will fill out an application for a permit in the Engineering Division for the work that is to be performed.

- 7.5 All required licenses and certificates for all workers will be copied in color and supplied to the Engineering Division upon submitting a 'Permit Application'.
- 7.6 All required licenses and certificates for work being performed must be in the possession of the person(s) while performing the work.

SECTION 8 - SAFETY

- 8.1 All Federal, State and Local safety regulations are to be followed.
- 8.2 Contractor must follow the City of Woonsocket regulations and policies as set forth in the Department of Public Works, Engineering Division "Permit Manual".

Note: A copy of which can be obtained in the Engineering Division or on the City web site at http://www.ci.woonsocket.ri.us/WPM 92009.pdf.

8.3 The contractor assumes responsibility for risks and causalities of every description, for loss or injury to persons and property arising out of the nature of the work, from the action of the elements or from any unforeseen or unusual difficulty.

SECTION 9 - CLEANING UP

- 9.1 The work area and the adjacent areas affected by the progress of the work is to remain clean and all rubbish, surplus materials and unneeded equipment must be removed.
- 9.2 All damage to said areas will be repaired immediately so as to inconvenience the general public and the property owners as little as possible.
 - 9.2.1 All damage and repairs will be the sole responsibility of the Contractor.
- 9.3 Material and/or debris from the Contractor's operations, which have washed into, flowed into or placed in water courses, ditches, gutters, drains, catch basins, pavement areas or anywhere else, will be removed entirely and satisfactorily disposed of during the progress of the work and the ditches, gutters, drains, catch basins, pavement areas, etc. will be kept in a clean and neat condition, thereafter.
- 9.4 The Contractor will restore or replace, whenever ordered by the City Engineer, any public or private property damaged by his work, equipment or employees to a condition at least equal to the condition existing immediately prior to the beginning of his operations.
- 9.5 The Contractor is to complete all necessary driveway, highway, front walkway and/or landscaping work directly related to said damages. Suitable materials, equipment and methods will be used for such restoration.
- 9.6 The Contractor will save harmless the City from any damage claims caused by his operations.

SECTION 10 - PROTECTION OF THE WORK

10.1 The Contractor will schedule his concrete pours so that, by the end of the working day, the finished surface of the concrete has set sufficiently to withstand accidental intrusion by walking pedestrians, deliberate vandalism and/or intentional graffiti.

- 10.2 The Contractor is to provide and install adequate, sturdy barricades such as plastic drums to surround and protect the newly poured concrete and must be included as part of each item in the Bid Proposal clearly and completely.
 - 10.2.1 Sawhorses and/or wood barricades are not permitted to be used in the public right-of-ways.
 - 10.2.2 Yellow plastic warning/ribbon, by itself alone, does not constitute an adequate, sturdy barricade.
- 10.3 The Contractor will provide non-uniformed watchmen from his own forces to protect the newly poured concrete until the surface has reached a proper set to withstand the types of damage detailed above or as long as directed by the City Engineer and will be included as part of each item in the Bid Proposal.
- 10.4 The Contractor, during rainy weather, must protect the newly poured concrete with polyethylene sheets or other approved covering material and to be included as part of each item in the Bid Proposal.
 - 10.4.1 This covering material will be readily available on the site prior to and during any concrete work.

SECTION 11 – GUARANTEE

- 11.1 The contractor or his sureties will be held liable for keeping in perfect repair, adjustment and good order, the whole of the work to be constructed under this contract, and for other damages that may occur by reason of the construction. Should it be necessary to excavate the utilities before formal acceptance for any reason, the City will not accept any charges from the bidder deemed part of the original scope of work.
- 11.2 Neither the final certificate of payment nor any provision of the Contract Documents nor partial or entire occupancy of the premises will constitute acceptance of the work specified in the Contract Documents or relieve the Contractor of liability with respect to any express warranties or responsibility for faulty workmanship.
- 11.3 The Contractor will remedy any defects in the work and pay for any damage to other work, resulting from his operations, within a period of six (6) months from the date of completion of that of that portion of the work and not necessarily from the expiration date of the Contract.
- 11.4 The City will give notice of observed defects with reasonable promptness.

SECTION 12 - WORK SCHEDULE

- 12.1 The Contractor will commence work within fourteen (14) days after receiving a work list and continue the work until the list is completed. If additional work lists are received before the work is completed, the Contractor will continue to work on the lists in the order they are received until all the work lists have been completed or unless otherwise directed by the Director.
- 12.2 The locations for the sidewalk work in the City will be given to the Contractor as soon as a list is completed. All other work will be placed on the next list.

- 12.3 The lists are compiled from public applications for sidewalk work and from City Divisions.
- 12.4 The types and quantities of concrete work required will vary from job to job.
- 12.5 It is the City's intent to provide the Contractor with several weeks of steady work with each list.
- 12.6 By the Friday of each week, or the day before a holiday, all open sidewalk work locations will be completed and construction debris properly disposed.

SECTION 13 - PAYMENT

- 13.1 Payments terms are Net 60 days.
 - 13.1.1 Sixty (60) calendar days starts upon the receipt of an itemized invoice, including the certified payroll of all employees performing work under this agreement.
- 13.2 The Contractor will be paid for the amount of concrete sidewalks installed during the preceding period, which have been completed and acceptable to the City.
- 13.3 No payment will be made for work not ordered or for cancelled work or for work not inspected by the City, nor for necessary incidental work considered by the City Engineer to be included in the unit prices bid.
 - 13.3.1 The City considers incidental costs to be miscellaneous expenses that are incurred and needed as part of running a business. Incidental costs aren't directly tied to a business's core competencies.
- 13.4 Payments terms are Net 60 days. 60 calendar days starts upon the receipt of an approved, itemized invoice

CITY OF WOONSOCKET RHODE ISLAND FINANCE DEPARTMENT

BID CERTIFICATION

The undersigned bidder proposes to furnish all materials, labor, equipment and related incidentals, other related work and overhead items for "Installation of Portland Cement Concrete Sidewalks. for the City of Woonsocket, Rhode Island. The contract term will be for a one (1) year period from the date of award; or the awarding of a new contract, all in strict accordance with the specifications for the unit prices set forth in the bid proposal.

CERTIFICATION SUMMARY:

The bidder declares that this proposal is made without connection with any other person(s) making proposals for the same specifications and is in all respects fair and without collusion or fraud.

The bidder further declares that, except in the normal discharge of his/her duties, no person acting for or employed by the City of Woonsocket has direct or indirect interest in the proposal or in any of the profits thereof.

The bidder certifies that the above statements are accurate and true and has carefully examined and read all of the specifications and the contract provisions and understands that it affects the acceptability of my proposal(s).

AUTHORITY TO CONTRACT:

The person who signs this agreement certifies that they are an agent of the company submitting the proposal. Has the legal authority to enter their organization into a binding agreement with the City of Woonsocket and to commit that organization to fulfilling the contract term obligations contained herein.

The undersigned further certifies that the company is qualified to do business in the State of Rhode Island, if applicable, and is not prohibited from entering into or performing any of the terms of this agreement for any reason.

CONFLICT OF INTEREST:

Any Offeror responding to this Invitation to Bid are required to disclose any potential conflict of interest. If the owner of the bidding firm is related to a City of Woonsocket employee, that relationship must be disclosed in writing and made a part of the bid response. Definition Related Person: Related person to a City of Woonsocket employee means a spouse or dependent child of such employee. The term extends to other individuals sharing the same household as well as siblings, parents and non-dependent children (including step and in-law variations of those relationships) in circumstances where the City of Woonsocket employee has actual knowledge that such relative is likely to or will benefit from a particular City of Woonsocket transaction.

CITY OF WOONSOCKET RHODE ISLAND FINANCE DEPARTMENT

BID PROPOSAL

ITEM	DESCRIPTION	U/M	UNIT PRICE (U/M)	UNIT PRICE (U/M) for PRE-PREPARED
1.	Remove existing earth, asphalt, concrete and then install 4" Portland Cement Concrete Each Area = 0 SY – 4.00 SY	S.Y.	\$	\$
2.	Remove existing earth, asphalt, concrete and then install 4" Portland Cement Concrete Each Area = 4.01 SY - 8.00 SY	S.Y.	\$	\$
3.	Remove existing earth, asphalt, concrete and then install 4" Portland Cement Concrete Each Area = 8.01 SY and over	S.Y.	\$	\$
4.	Remove existing 6" of earth, rock, and/or asphalt concrete and then install 6" Portland Cement Concrete Residential Driveway with welded wire mesh.	S.Y.	\$	\$
	Each Area = 0 SY - 4.00 SY			
5.	Remove existing 6" of earth, rock, and/or asphalt concrete and then install 6" Portland Cement Concrete Residential Driveway with welded wire mesh	S.Y.	\$	\$
	Each Area = 4.01 SY - 8.00 SY			
6.	Remove existing 6" of earth, rock, and/or asphalt concrete and then install 6" Portland Cement Concrete Residential Driveway with welded wire mesh	S.Y.	\$	\$
	Each Area = 8.01 SY and over			
7.	Remove existing 4" to 8" concrete and then install 8" Portland Cement Concrete Industrial Driveway with welded wire mesh Each Area = 0 SY – 4.00 SY	S.Y.	\$	\$

BID PROPOSAL CONTINUED

ITEM	DESCRIPTION	U/M	UNIT PRICE (U/M)	UNIT PRICE (U/M) for PRE-PREPARED
8.	Remove existing 4" to 8" concrete and then install 8" Portland Cement Concrete Industrial Driveway with welded wire mesh Each Area = 4.01 SY - 8.00 SY	S.Y.	\$	\$
9.	Remove existing earth, asphalt, concrete and then install 8" Portland Cement Concrete	S.Y.	\$	\$
	Each Area = 8.01 SY and over			
10.	Excavate unsuitable material below subgrade, as directed	C.Y.	\$	\$
11.	Excavate rock and/or ledge below subgrade, as directed	C.Y.	\$	\$
12.	Furnish and install approved gravel to the proper sub-grade, as directed	C.Y.	\$	\$
13.	Furnish and install 4" of loam and seed, as directed	C.Y.	\$	\$
14.	Remove existing curbing, only as directed	L.F.	\$	\$
15.	Reset existing curbing, only as directed	L.F.	\$	\$
16.	Change water service box, rod and pin, as directed. Box supplied by the Water Division	EA.	\$	\$
17.	Change water service box by cutting the top 6" off and replace with box extension, as directed. Extensions supplied by Water Division.	EA.	\$	\$
18.	Permanent asphalt patching, as directed	PER TON	\$	\$
19.	Material needed above and beyond required as approved / directed	COST + 10%		
20.	Police Detail	COST + 10%		
21.	Police Cruiser		COST ONL	Υ

CITY OF WOONSOCKET, RI FINANCE DEPARTMENT OFFICE OF PURCHASING

BID SIGNATURE PAGE

We, the undersigned, submit this proposal to provide the Installation of Portland Concrete Cement Sidewalks, Bid No. 6214, to the City of Woonsocket. The undersigned also certifies and agrees to all the terms and conditions contained herein.

COMPANY NAME:	
ADDRESS:	
CITY, STATE ZIP:	
PHONE:	
EMAIL:	
PRINT NAME:	
TITLE:	
SIGNATURE:	
DATE:	